




**THE DATASHEET OF
SSL-LX5093GD-5V**



PART NUMBER	SSL-LX5093GD-5V	REV.	D
DATE	E.C.N. NUMBER AND REVISION COMMENTS	REV.	
06.04.94	REDRAWN.	A	
05.29.01	E.C.N. #10BRDR. & REDRAWN.	B	
10.19.06	E.C.N. #11148.	C	
02.01.12	E.C.N. #10BRDR. & REDRAWN.	D	

[60.232]

60.197]

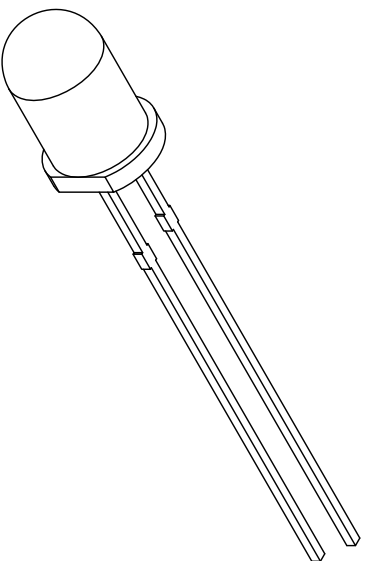

MAX.

PARAMETER	MIN	TYP	MAX	UNITS	TEST COND
PEAK WAVELENGTH		565		nm	
FORWARD VOLTAGE		5.0	7.0	Vf	I=100µA
REVERSE VOLTAGE	5.0			Vr	I=5V
AXIAL INTENSITY		20		md	
VIEWING ANGLE		60		2x theta	
EMITTED COLOR:		GREEN			
EPoxy LENS FINISH:		GREEN DIFFUSED			

ELECTRO-OPTICAL CHARACTERISTICS Ta=25°C If=5V

PARAMETER	MIN	TYP	MAX	UNITS	TEST COND
PEAK WAVELENGTH		565		nm	
FORWARD VOLTAGE		5.0	7.0	Vf	I=100µA
REVERSE VOLTAGE	5.0			Vr	I=5V
AXIAL INTENSITY		20		md	
VIEWING ANGLE		60		2x theta	
EMITTED COLOR:		GREEN			
EPoxy LENS FINISH:		GREEN DIFFUSED			

LIMITS OF SAFE OPERATION AT 25°C

PARAMETER	MAX	UNITS
PEAK FORWARD VOLTAGE	7.0	V
STEADY CURRENT	12	mA
POWER DISSIPATION	310	mW
DERATE FROM 25°C	-1.2	mW/°C
OPERATING TEMP.	-40 TO +85	°C
STORAGE TEMP.	-40 TO +85	°C
SOLDERING TEMP.	+260	°C
2.0mm FROM BODY	3	SEC.

X±1 (+0.039), X.X=±0.5 (+0.020), X.XX=±0.25 (+0.010), X.XXX=±0.127 (+0.005), LEAD SIZE=±0.05 (+0.002), LEAD LENGTH=±0.75 (+0.030), MIN.= +DECIMAL PRECISION MAX.= +0.00 -DECIMAL PRECISION

UNCONTROLLED DOCUMENT

DATE: 02.01.12 DRAWN BY: AB

PAGE: 1 OF 1 CHKD BY: KF

SCALE: NTS APRVD BY: KF

UNIT: mm [INCH]

QUASARBRITE T-5mm (T-1 3/4) 565nm GREEN LED, GREEN DIFFUSED LENS, 5 VOLT OPERATION.

THE SPECIFICATIONS MAY CHANGE AT ANY TIME WITHOUT NOTICE DUE TO NEW MATERIALS OR PRODUCT IMPROVEMENT

CONFIDENTIAL INFORMATION
 THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF LUXEY INC. EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY LUXEY INC., THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN WHOLE OR IN PART FROM DISCLOSURE AND DISSEMINATION TO ALL THIRD PARTIES.

Y AFE
 SAN TL 60188-4900
 800.278.5666
 3.15.2152
 LUXEY.COM
 /7W PHOTONICS GROUP



Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

-  [View SSL-LX5093GD-5V on WIN SOURCE](#)
-  [Lumex Opto/Components Inc. Information](#)

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management