




THE DATASHEET OF CY8CLEDAC02



CUSTOMER TERMINAL	RoHS	LEAD(Pb)-FREE
Sn96%, Ag4%	Yes	Yes

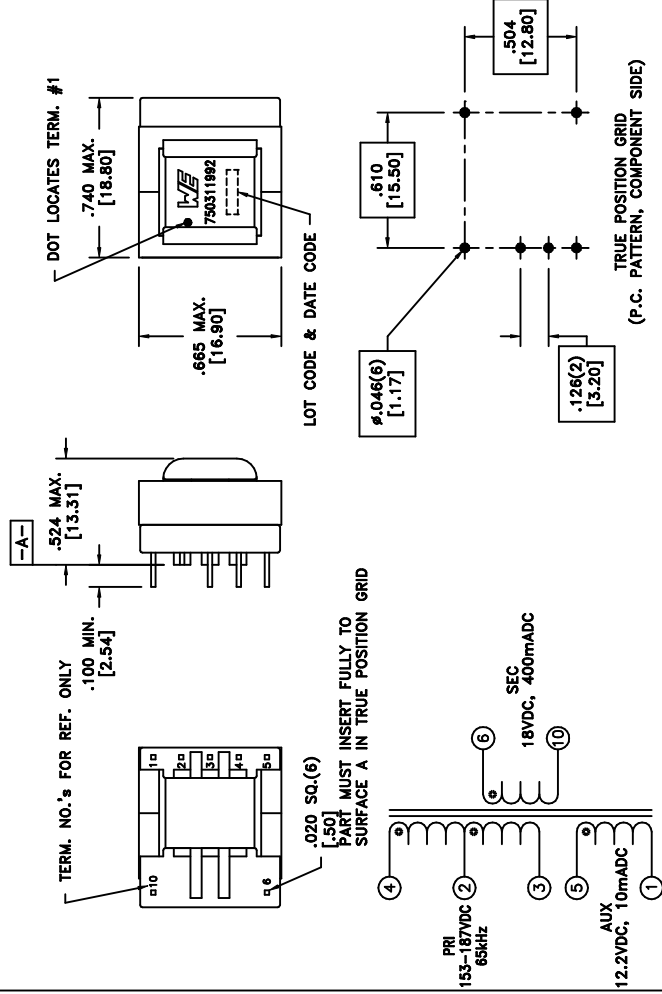

ELECTRICAL SPECIFICATIONS @ 25°C

PARAMETER	TEST
D.C. RESISTANCE	4-3
D.C. RESISTANCE	5-1
D.C. RESISTANCE	6-10
INDUCTANCE	4-3
SATURATION CURRENT	20% rol tie
LEAKAGE INDUCTANCE	4-3
DIELECTRIC	4-6
TURNS RATIO	()
TURNS RATIO	(4)
TURNS RATIO	()

GENERAL SPECIFICATIONS:
OPERATING TEMPERATURE RANGE: -40°

Designed to comply with requirements

Wire insulation & RoHS status not affected by wire color.
 Wire insulation color may vary depending on availability.

DETAILS SUBJECT TO CHANGE

REV.	DATE	Packaging Specifications
		Method: Tray
		PKG-0735
		www.we-online.com/midcom
6A	12/10	SEE REVISION SHEET FOR REVISION LEVEL

Tolerances unless otherwise specified:
 Angles: ±1°
 Fractions: ±1/64
 Decimals: ±.005
 Footprint: ±.001

This drawing is dual dimensioned. Dimensions in brackets are in millimeters.

DRAWING TITLE



TRANSFORMER

eiSos p/n: 750311992



Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

-  [View CY8CLEDAC02 on WIN SOURCE](#)
-  [Cypress Semiconductor Corp Information](#)

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management