



**THE DATASHEET OF  
S1D13706F00A200-90**



# S1D13706

## S1D13706 QVGA LCD Controller

The S1D13706 is a color/monochrome LCD graphics controller with an embedded 80 KB SRAM display buffer. While targeting QVGA TFT panels, the S1D13706 supports a wide variety of other panel types and provides a low cost, low power, single chip solution to meet the demands of embedded markets. It is an ideal solution for devices where board size and battery life are major concerns.

The S1D13706 utilizes a guaranteed low-latency CPU architecture thus providing support for microprocessors without READY/WAIT# handshaking signals. The 32-bit internal data path provides high performance bandwidth into display memory allowing for fast screen updates.


Products requiring a rotated display image can take advantage of the SwivelView™ feature which provides hardware rotation of the display memory transparent to the software application. The S1D13706 also provides support for "Picture-in-Picture" (a variable size overlay window).

The S1D13706's impartiality to CPU type or operating system makes it an ideal display solution for a wide variety of applications.

### FEATURES


- Embedded 80KB SRAM display buffer
- Low operating voltage
- Low-latency CPU interface
- Direct support for most popular Host Interfaces
- Programmable resolutions and color depths
- STN LCD support
- TFT LCD support
- Reflective active matrix support
- SwivelView™ (90°, 180°, 270° hardware rotation of displayed image)
- Picture-in-Picture (overlay window)
- Software initiated power save mode
- Hardware or software video invert
- 100-pin TQFP15 package

### SYSTEM BLOCK DIAGRAM

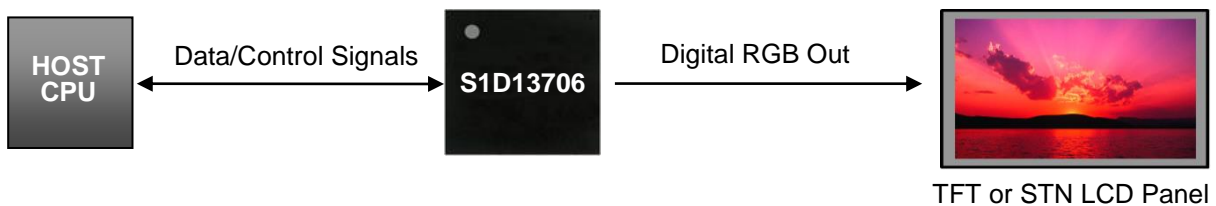

#### S1D13706 Features

- 80 KB SRAM
- SwivelView Hardware Rotation
- Picture-in-Picture Overlay Window
- Double Buffering



## DESCRIPTION

### Display Buffer

- Embedded 80 KB SRAM display buffer

### CPU Interface

- Fixed low-latency CPU access times
- Direct support for most popular host interfaces

### Display Support

- 4/8-bit monochrome LCD interface
- 4/8/16-bit color STN LCD interface
- Single-panel, single-drive passive displays
- 9/12/18-bit TFT panels
- Typical resolutions supported:
  - 320x240@8bpp
  - 160x160@16bpp
  - 160x240@16bpp

### Clock Source

- Two clock inputs (single clock possible)
- Clock source can be internally divided down for a higher frequency clock input

### Power Down Modes

- Software initiated power save mode

### Display Modes

- 1/2/4/8 bpp support
- Up to 64 shades of gray using FRM and dithering on monochrome passive LCD panels
- Up to 64K colors on passive STN and active matrix panels
- SwivelView™: direct hardware rotation of display image by 90°, 180°, 270°
- "Picture-in-Picture" displays a variable size window overlaid over background image
- Double buffering/multi-pages: provides smooth animation and instantaneous screen update

### Operating Voltage

- COREVDD 1.8 to 2.2 volts and 3.0 to 3.6 volts
- HIOVDD 1.8 to 2.2 volts and 3.0 to 3.6 volts
- NIOVDD 3.0 to 3.6 volts

### Package

- 100-pin TQFP15

For more information on the S1D13706 and other Epson Display Controllers, visit the Epson Global website.

[https://global.epson.com/products\\_and\\_drivers/semicon/products/display\\_controllers/](https://global.epson.com/products_and_drivers/semicon/products/display_controllers/)



For Sales and Technical Support, contact the Epson representative for your region.

[https://global.epson.com/products\\_and\\_drivers/semicon/information/support.html](https://global.epson.com/products_and_drivers/semicon/information/support.html)



#### NOTICE:

Document code: X31B-C-001-04.2

No part of this material may be reproduced or duplicated in any form or by any means without the written permission of Seiko Epson. Seiko Epson reserves the right to make changes to this material without notice. Seiko Epson does not assume any liability of any kind arising out of any inaccuracies contained in this material or due to its application or use in any product or circuit and, further, there is no representation that this material is applicable to products requiring high level reliability, such as, medical products. Moreover, no license to any intellectual property rights is granted by implication or otherwise, and there is no representation or warranty that anything made in accordance with this material will be free from any patent or copyright infringement of a third party. When exporting the products or technology described in this material, you should comply with the applicable export control laws and regulations and follow the procedures required by such laws and regulations. You are requested not to use, to resell, to export and/or to otherwise dispose of the products (and any technical information furnished, if any) for the development and/or manufacture of weapon of mass destruction or for other military purposes.

All brands or product names mentioned herein are trademarks and/or registered trademarks of their respective companies.

©Seiko Epson Corporation 2000 - 2018. All rights reserved.

## Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

- ⊖ [View S1D13706F00A200-90 on WIN SOURCE](#)
- ⊖ [Epson Electronics America Inc-Semiconductor Div Information](#)

## Optimize Your Supply Chain with WIN SOURCE Solutions

- ✓ Global Sourcing Solution
- ✓ Obsolete Management
- ✓ Cost Control Management
- ✓ Shortage Management
- ✓ Alternative Solution
- ✓ Excess Inventory Management