



**THE DATASHEET OF
S1D13743F00A200-60**



S1D13743

S1D13743 WQVGA LCD Controller

The S1D13743 is a WQVGA color LCD controller with an embedded 464 KB display buffer. The S1D13743 supports a 8/16-bit Intel 80 CPU architecture while providing high performance bandwidth into display memory allowing for fast screen updates.


Products requiring a rotated display image can take advantage of the SwivelView™ feature which provides hardware rotation of the display memory transparent to the software application. Resolutions supported include 480x272@24bpp single buffered or 320x240@24bpp double-buffered. The S1D13743 uses a double-buffer architecture to prevent any visual tearing during streaming video screen updates.

The S1D13743 provides a low cost, low power solution for embedded markets which makes it an ideal display solution for a wide variety of applications.

FEATURES

- Embedded 464 KB SRAM display buffer
- Low operating voltage
- 8/16-bit Intel 80 interface (used for display or register data)
- Input data formats: RGB 8:8:8, 6:6:6, 5:6:5 and YUV 4:2:2, 4:2:0
- All input data is converted and stored as RGB 8:8:8
- Supports TFT panels
- RGB interface: 18/24-bit
- Supports resolutions up to 352x440
- Hardware / software power save mode
- 24 bpp color depths
- SwivelView™: 90°, 180°, 270° counter-clockwise hardware rotation of display image
- Double-buffer available to prevent image tearing during streaming input
- Pixel doubling: horizontal and vertical averaging for smooth doubling of a single window
- Pixel halving: no limitation on number of windows
- Internal programmable PLL
- Single MHz clock input: CLKI
- General purpose input/output pins

SYSTEM BLOCK DIAGRAM

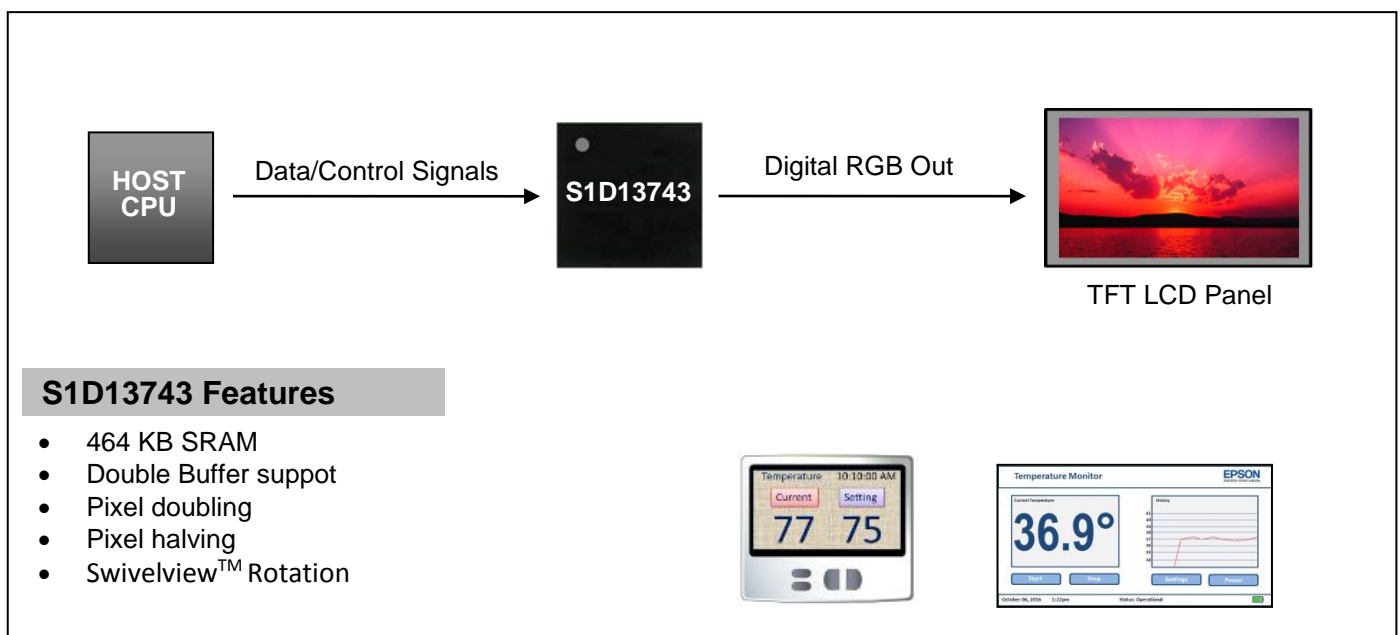

DESCRIPTION

Display Buffer

- Embedded 464 KB SRAM display buffer

CPU Interface

- 8/16-bit Intel 80 interface (used for display or register data)
- Indirect addressing

Input Data Format

- RGB: 8:8:8, 6:6:6, 5:6:5
- YUV 4:2:2, 4:2:0
- All input data is converted and stored as RGB 8:8:8

Miscellaneous

- Internal programmable PLL
- Single MHz clock input: CLKI
- CLKI available as CLKOUT (separate CLKOUTEN pin associated with output)
- Hardware/software power save mode
- Input pin to enable/disable power save mode
- General purpose input/output pins are available (GPIO[7:0])
- COREVDD 1.5 volts
- IOVDD 1.65 ~ 3.6 volts
- QFP20 144-pin package

Display Support

- Supports TFT panels
 - 18/24 bit RGB interface
- Supports resolutions up to 352x440
- Frame rate modulation using 24 bpp data when configured for an 18-bit LCD panel

Display Features

- 24 bpp color depth
- All display writes are handled by window apertures/position (for complete or partial display updates). All window coordinates are referenced to top left corner of the displayed image (even in a rotated display, the top-left corner is maintained and no host side translation need take place).
- SwivelView™: 90°, 180°, 270° counter-clockwise hardware rotation of display image. All displayed windows can have independent rotation. No additional programming necessary when enabling these modes.
- Double-buffer available to prevent image tearing during streaming input. Resolutions supported must fit inside 384 KB. Typical resolution of 320x240.
- Pixel doubling: horizontal and vertical averaging for smooth doubling of a single window
- Pixel halving: no limitation on number of windows

For more information on the S1D13743 and other Epson Display Controllers, visit the Epson Global website.

https://global.epson.com/products_and_drivers/semicon/products/display_controllers/



For Sales and Technical Support, contact the Epson representative for your region.

https://global.epson.com/products_and_drivers/semicon/information/support.html



NOTICE:

Document code: X70A-C-001-03.2

No part of this material may be reproduced or duplicated in any form or by any means without the written permission of Seiko Epson. Seiko Epson reserves the right to make changes to this material without notice. Seiko Epson does not assume any liability of any kind arising out of any inaccuracies contained in this material or due to its application or use in any product or circuit and, further, there is no representation that this material is applicable to products requiring high level reliability, such as, medical products. Moreover, no license to any intellectual property rights is granted by implication or otherwise, and there is no representation or warranty that anything made in accordance with this material will be free from any patent or copyright infringement of a third party. When exporting the products or technology described in this material, you should comply with the applicable export control laws and regulations and follow the procedures required by such laws and regulations. You are requested not to use, to resell, to export and/or to otherwise dispose of the products (and any technical information furnished, if any) for the development and/or manufacture of weapon of mass destruction or for other military purposes.

All brands or product names mentioned herein are trademarks and/or registered trademarks of their respective companies.

©Seiko Epson Corporation 2005 - 2018. All rights reserved.

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

- [View S1D13743F00A200-60 on WIN SOURCE](#)
- [Epson Electronics America Inc-Semiconductor Div Information](#)

Optimize Your Supply Chain with WIN SOURCE Solutions

- ✓ Global Sourcing Solution
- ✓ Obsolete Management
- ✓ Cost Control Management
- ✓ Shortage Management
- ✓ Alternative Solution
- ✓ Excess Inventory Management