




**THE DATASHEET OF
SIP5638CS-TR-E3**





Power ICs - SiP56xx Family

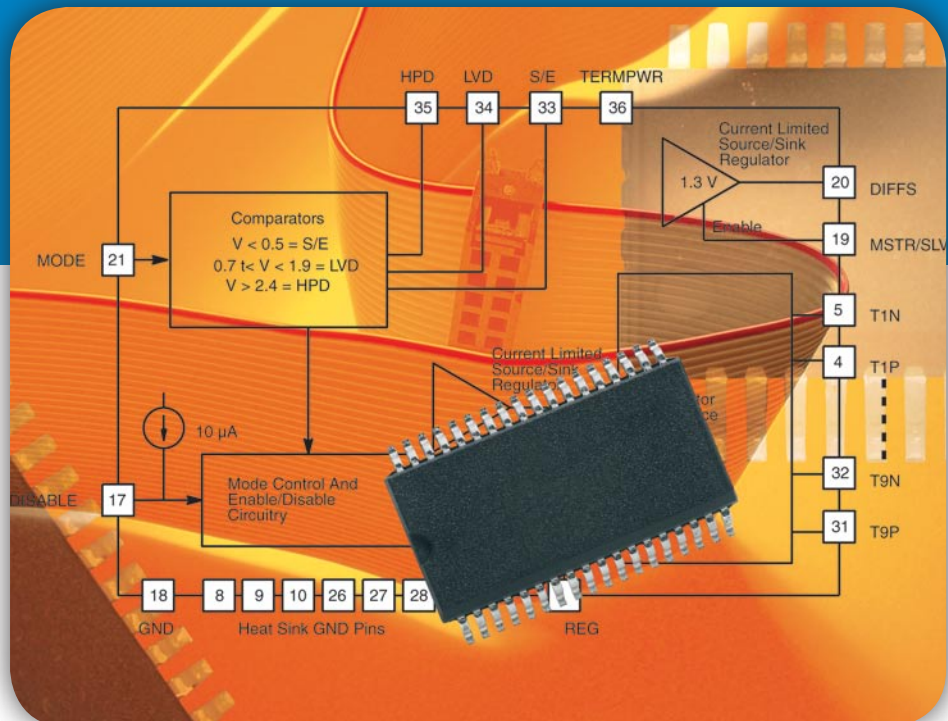

SCSI Bus Active Terminator ICs: 9-, 14-, 15-, and 27-Channel

FEATURES

- Auto selection of S/E or LVD SCSI termination
- Meets SCSI-1, SCSI-2, SPI-2 (ULTRA-2), SPI-3, (ULTRA-160), and SPI-4 (ULTRA-320) standards
- Differential failsafe bias
- Active negation
- Hot swap compatible
- Integrated SPI-3 mode change delay filter option

APPLICATIONS

- Disk array (RAID)
- Storage area networks (SAN)
- Network attached storage (NAS)
- SCSI cable
- Server and workstation

For more information, visit our web site at www.vishay.com/ref/poweric
Or send E-mail to: Power_IC@vishay.com



SCSI Bus Active Terminator ICs: 9-, 14-, 15- and 27-Channel

FEATURE	BENEFIT
• Auto selection of S/E or LVD SCSI termination	• Simplifies installation
• Meets all parallel SCSI standards	• Fully backwards compatible
• On-chip thermal shutdown circuit	• Fully protected
• Hot swap compatible	• No need to power down
• Integrated delay filter option	• Eliminates bulky 4.7- μ F low pass filter capacitor

ADDITIONAL FEATURES

- 2.7-V to 5.25-V TERMPWR range
- Meets SCSI-1, SCSI-2, SPI-2 (ULTRA-2), SPI-3, (ULTRA-160), and SPI-4 (ULTRA-320)
- Meets SPI-5 (ULTRA-640) standards (SiP5696)
- Differential failsafe bias
- Thermal package
- Master/slave input (SiP5630 and SiP5670)
- Active negation
- Integrated SPI-3 mode change delay filter (SiP5668, SiP5670, and SiP5678)
- Lead (Pb)-free packages

DESCRIPTION

The SiP56xx family provides active bus termination suitable for all SCSI bus operational modes from SCSI-1 through SPI-4 (Ultra 320). The SiP5696 operates through SPI-5 (Ultra 640). The termination includes impedance matching of the SCSI bus to minimize signal reflections from the end of the bus, as well as required SCSI bus biasing for either S/E (single-ended) or LVD (low-voltage differential) operation. The SiP56xx senses the operational state of the SCSI bus via the DIFFSENS bus signal, and automatically switches to S/E or LVD operation as required. The SiP56xx family cannot be used on an HPD (high-power differential) SCSI bus, and goes into high impedance mode when the voltage on the DIFFSENS line indicates HPD operation. The SiP56xx also presents high impedance to the SCSI bus if the DISABLE pin is asserted, or if TERMPWR is removed from the IC. An optional integrated mode change delay filter eliminates the need for a bulky 4.7- μ F low pass filter capacitor to be compliant with SPI-3 mode change timing requirements. Devices in the SiP56xx family are available in a lead (Pb)-free package for operation over the temperature range of 0 to +70 °C.

PRODUCT SELECTION TABLE

	SiP5630	SiP5670	SiP5628	SiP5668	SiP5638	SiP5678	SiP5696
Number of lines	9	9	14	14	15	15	27
Enable active LOW	X	X	X	X	X	X	X
Operation mode	Multimode	Multimode	Multimode	Multimode	Multimode	Multimode	LVD only
Integrated SPI-3 delay filter		X		X		X	X
Master/Slave	X	X					
Status indicator	X	X	X	X			X
SPI-5 and above							X
Lead (Pb)-free package	QSOP-36	QSOP-36	SQFP-48	SQFP-48	SQFP-48	SQFP-48	LQFP-80
Alternate source to	TI UCC5630A Maxim DS2118	TI UCC5670	TI UCC5628 Maxim DS2127	Maxim DS2127	TI UCC5638 Maxim DS2125		TI UCC5696

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

- ⊖ [View SIP5638CS-TR-E3 on WIN SOURCE](#)
- ⊖ [Vishay Information](#)

Optimize Your Supply Chain with WIN SOURCE Solutions

- ✓ Global Sourcing Solution
- ✓ Obsolete Management
- ✓ Cost Control Management
- ✓ Shortage Management
- ✓ Alternative Solution
- ✓ Excess Inventory Management