THE DATASHEET OF

SRP1040-220M

www.win-source.net 0086-755-83957316

Features

- Shielded construction
- Unit height of 4.2 mm
- Inductance range: 0.15 μH to 47 μH
- Current up to 34 A
- RoHS compliant*

**Models SRP1040-220M, -330M & -470M are currently available but not recommended for new designs.

SRP1040 Series - Shielded Power Inductors

Electrical Specifications

Bourns Part No.	Inductance L (μH) ±20 %	I rms (A)	I sat (A)	DCR (mΩ) max.
SRP1040-R15M	0.15	34	40	1.3
SRP1040-R20M	0.20	32	40	1.0
SRP1040-R36M	0.36	28	40	1.4
SRP1040-R39M	0.39	24	32	1.4
SRP1040-R47M	0.47	26	38	1.6
SRP1040-R50M	0.50	23	32	1.9
SRP1040-R56M	0.56	25	36	1.9
SRP1040-R68M	0.68	23	32	2.4
SRP1040-R75M	0.75	22	28	2.5
SRP1040-R80M	0.80	21	30	3.0
SRP1040-1R0M	1.0	20	28	3.5
SRP1040-1R2M	1.2	18	24	4.7
SRP1040-1R5M	1.5	12	20	7.5
SRP1040-1R7M	1.7	15	18	7.5
SRP1040-2R2M	2.2	12	17	8.6
SRP1040-2R5M	2.5	11.5	14	8.7
SRP1040-3R3M	3.3	10	14	10
SRP1040-3R9M	3.9	9.0	15	12
SRP1040-4R7M	4.7	8.0	13	14
SRP1040-5R6M	5.6	7.0	12	16
SRP1040-6R8M	6.8	6.5	11	24
SRP1040-8R2M	8.2	5.0	8.0	33
SRP1040-100M	10	5.0	9.0	35
SRP1040-150M	15	5.0	7.0	57
SRP1040-220M**	22	3.5	6.0	62
SRP1040-330M**	33	3.0	5.0	87
SRP1040-470M**	47	2.0	3.0	160

Soldering Profile

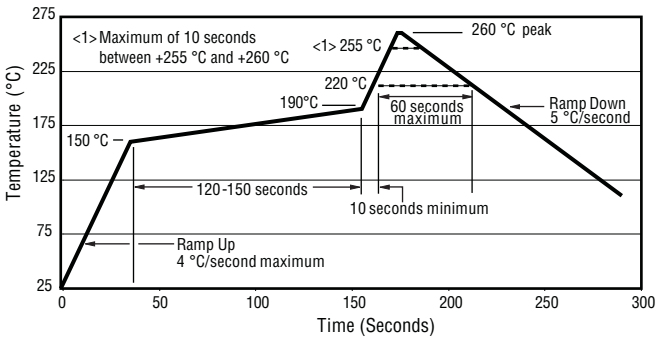

Electrical Schematic



General Specifications

Test Voltage.....0.25 V
Test Frequency .....100 KHz
Reflow Soldering.....230 °C; 50 sec max.
Operating Temperature ..-55 °C to +150 °C (Temperature rise included)
Storage Temperature..-55 °C to +150 °C
Resistance to Soldering Heat .....+260 °C for 10 sec.

Materials

Core.....Iron
Wire .....Enameled copper
Terminal .....Cu/Sn
Rated Current.....Ind. drops 20 % at I sat
Temperature Rise.....40 °C at rated I rms
Packaging .....900 pcs. per 13-inch reel

Product Dimensions

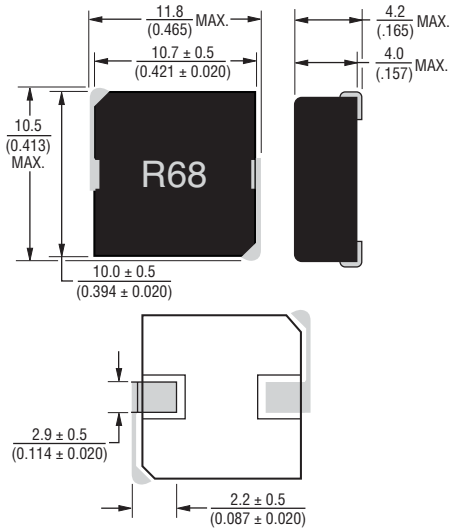

Recommended Layout



DIMENSIONS: MM (INCHES)

*RoHS Directive 2002/95/EC Jan 27, 2003 including Annex.
Specifications are subject to change without notice.
Customers should verify actual device performance in their specific applications.

Applications

- Input/output of DC/DC converters
- Power supplies for:
  - Portable communications equipment
  - Camcorders
  - LCD TVs
  - Car audio systems

SRP1040 Series - Shielded Power Inductors

BOURNS®

L vs. I Charts

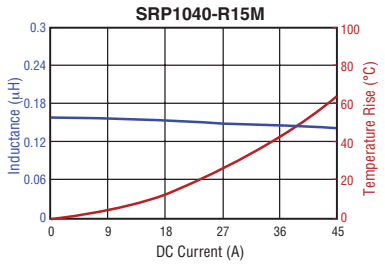

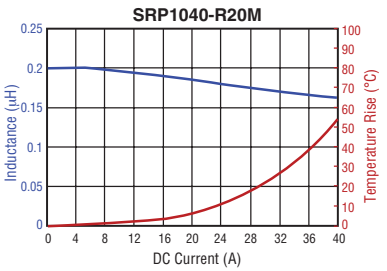

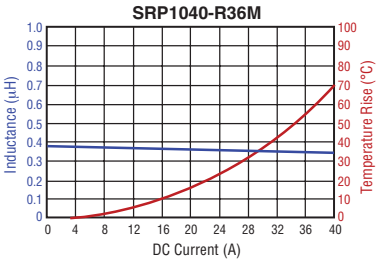

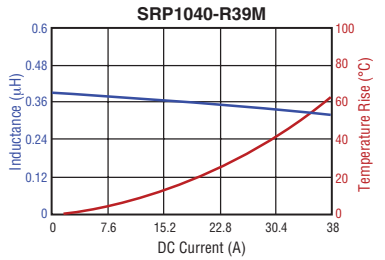

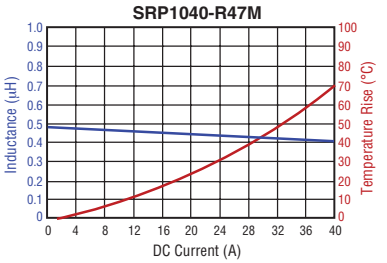

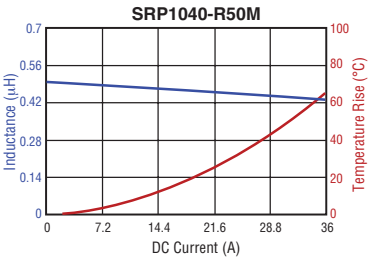

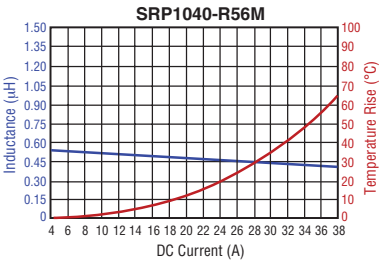

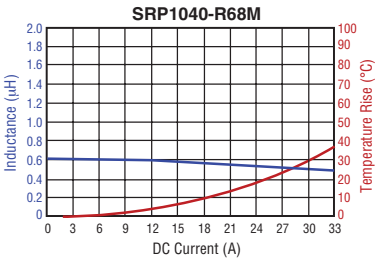

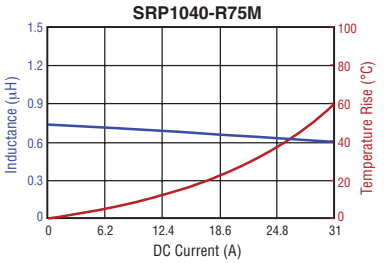

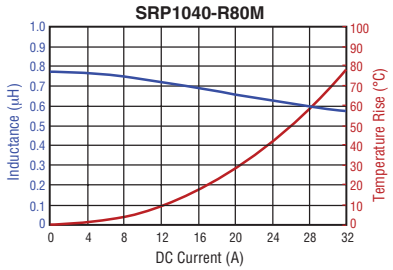

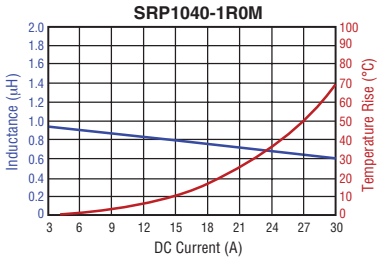

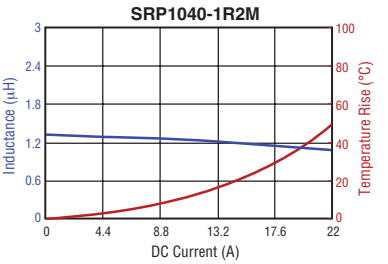

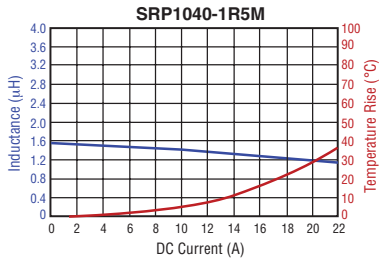

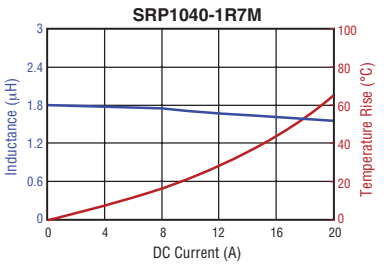

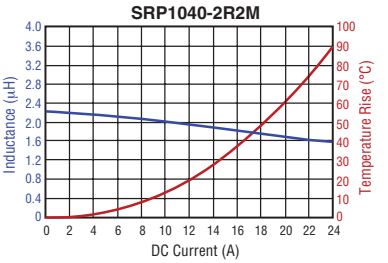

Specifications are subject to change without notice.
Customers should verify actual device performance in their specific applications.

L vs. I Charts

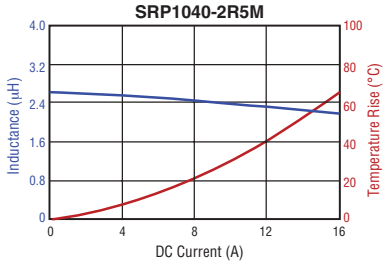

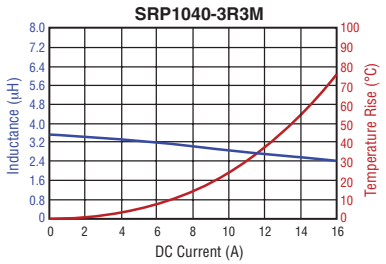

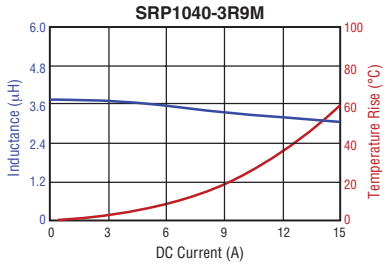

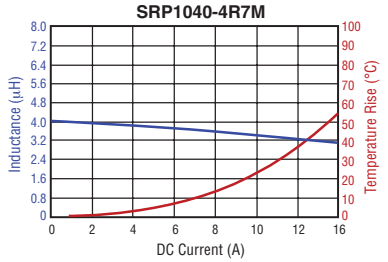

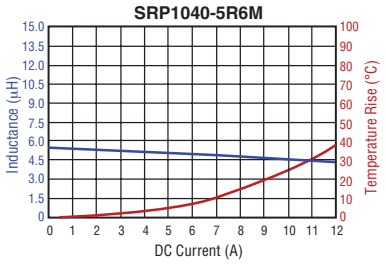

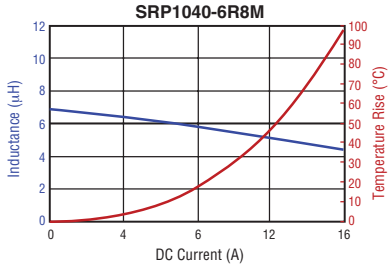

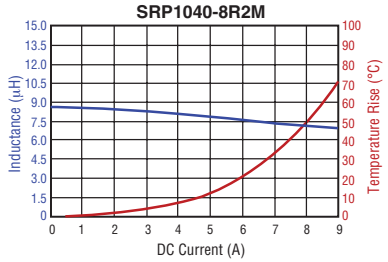

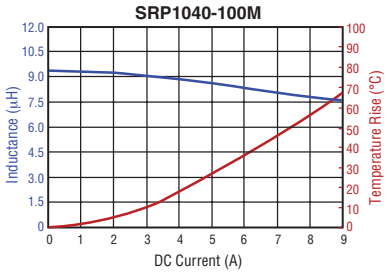

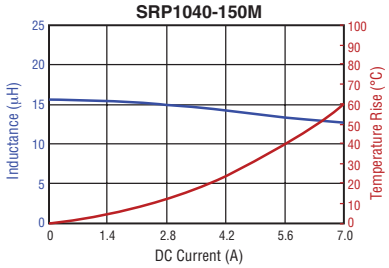

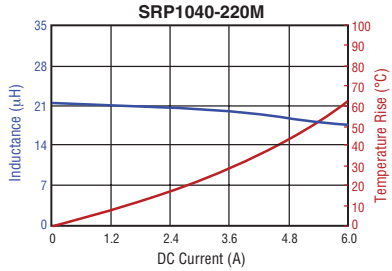

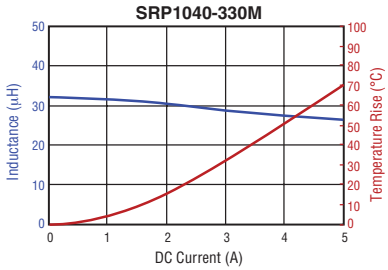

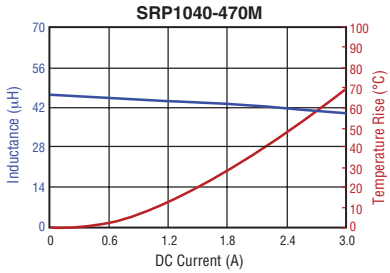

Specifications are subject to change without notice.
Customers should verify actual device performance in their specific applications.

Packaging Specifications

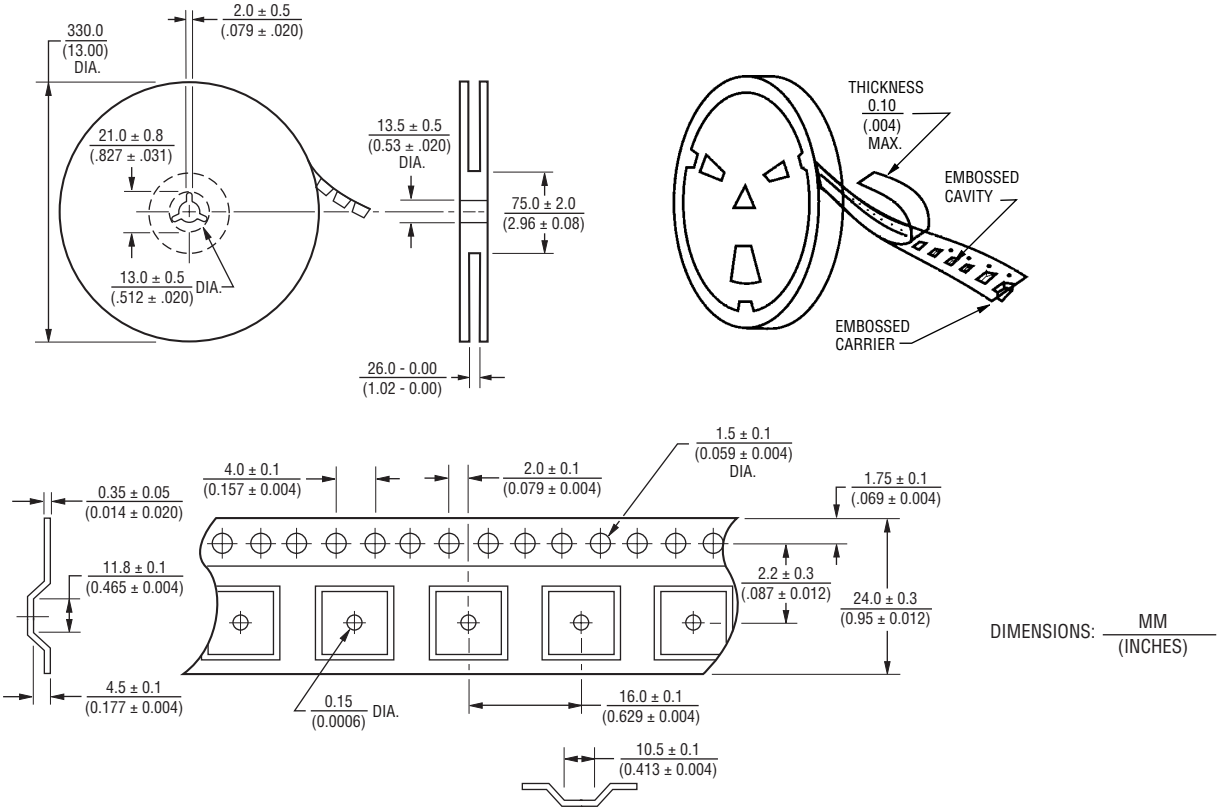

Specifications are subject to change without notice.
Customers should verify actual device performance in their specific applications.

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

- View SRP1040-220M on WIN SOURCE
- Bourns Inc. Information

Optimize Your Supply Chain with WIN SOURCE Solutions

- Global Sourcing Solution
- Obsolete Management
- Cost Control Management
- Shortage Management
- Alternative Solution
- Excess Inventory Management