



**THE DATASHEET OF  
R-78E5.0-1.0**



# Features

# Switching Regulator

- Efficiency up to 91%, no need for heatsinks
- Pin-out compatible with LM78XX linears
- Low profile (LxWxH=11.6 x 8.5 x 10.4mm)
- Wide input range (7V - 28V)
- Short circuit protection
- IEC/EN60950-1 + AM2 certified



## R-78E-1.0

1.0 Amp  
SIP3  
Single Output



### Description

The R-78E series is a switching regulator module that has been designed to offer all the advantages of a switching regulator (high efficiency, wide input range, accurate output voltage regulation) but with a low cost for production quantities. Due to the R-78E's high efficiency of up to 91% at an output voltage of 5V/1A at the output, no heat sink is required. The compact TO-220 compatible SIP3 package measures only 11.6 x 8.5 x 10.4 mm, so it saves precious board space. The warranty is 3 years.

### Selection Guide


Part Number	Input Voltage Range [VDC]	Output Voltage [VDC]	Output Current [A]	Efficiency <sup>(1)</sup>		max. Capacitive Load <sup>(2)</sup> [µF]
				@ min. Vin [%]	@ max. Vin [%]	
R-78E3.3-1.0	7-28	3.3	1.0	91	84	220
R-78E5.0-1.0	8-28	5.0	1.0	93	85	220
R-78E12-1.0/X9	15-27	12	1.0	97	93	100

#### Notes:

- Note1: Efficiency is tested at full load at +25°C ambient  
 Note2: Max. Cap Load is tested by nominal input and full resistive load



### Model Numbering

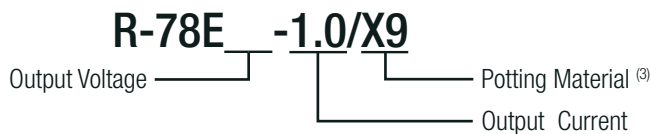

#### Notes:

- Note3: R-78E12-1.0/X9 is available with epoxy potting only.  
 For more information refer to "Material"

IEC60950-1 certified  
 EN60950-1 certified

### Specifications (measured at Ta= 25°C, full load, Vin= 24VDC and after warm-up)

BASIC CHARACTERISTICS				
Parameter	Condition	Min.	Typ.	Max.
Input Current	min. Vin			1000mA
Quiescent Current			1.5mA	
Internal Operating Frequency	3.3 & 5Vout		330kHz	
	12Vout		570kHz	
Minimum Load	only R-78E12-1.0/X9		2%	
Output Ripple and Noise <sup>(4)</sup>	20MHz BW			120mVp-p




#### Notes:

- Note4: Measurements are made with a 100nF MLCC across output (low ESR)

continued on next page

Specifications (measured at Ta= 25°C, full load, Vin= 24VDC and after warm-up)

Efficiency vs. Load

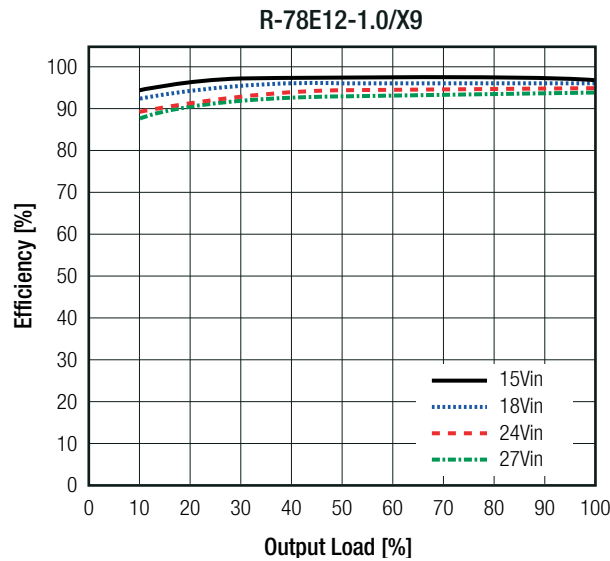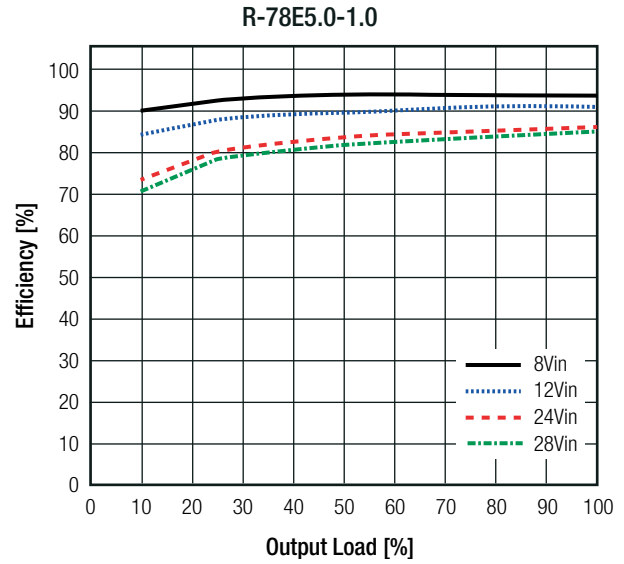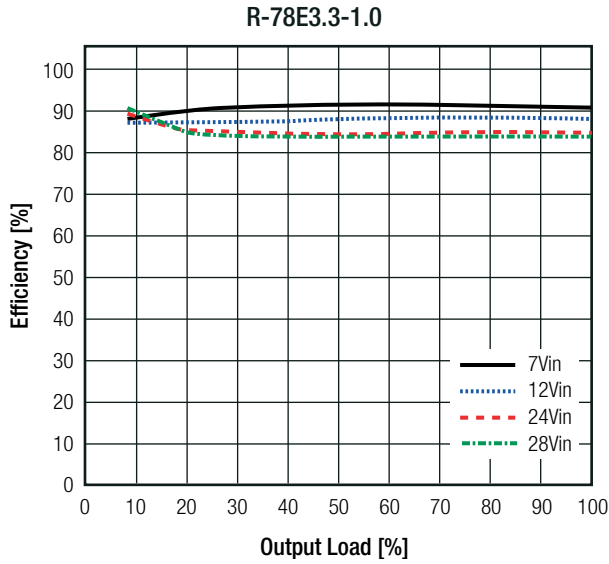

**REGULATIONS**

Parameter	Condition	Value
Output Accuracy		±3.0% typ. / ±5.0% max.
Line Regulation	low line to high line, full load	±1.0% max.
Load Regulation	typ Vin. and 10% to 100% load	±1.5% max.

**PROTECTIONS**


Parameter	Condition	Value
Short Circuit Protection (SCP)		Continuous, automatic recovery

Specifications (measured at Ta= 25°C, full load, Vin= 24VDC and after warm-up)

**ENVIRONMENTAL**

Parameter	Condition	Value
Operating Temperature Range	natural convection and with derating (see graph)	-40°C to +85°C
Humidity	non-condensing	95%, RH max.
MTBF	according to MIL-HDBK-217F, G.B.	+25°C
		+60°C
		3875 x 10 <sup>3</sup> hours
		2088 x 10 <sup>3</sup> hours

**Derating Graph**

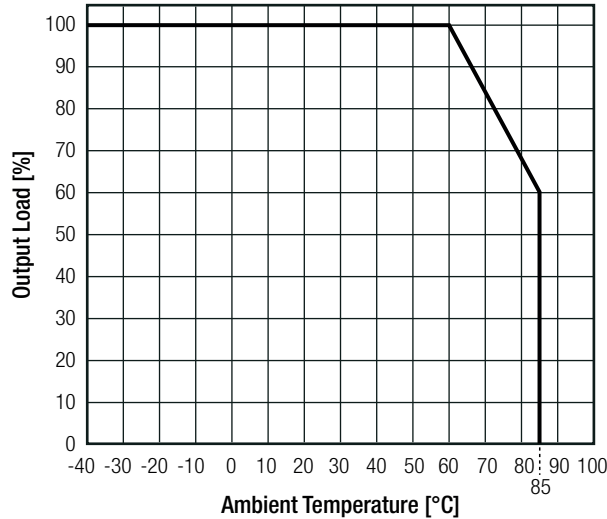


**SAFETY AND CERTIFICATIONS**

Certificate Type (Safety)	Report / File Number	Standard
Information Technology Equipment, General Requirements for Safety	1603123	IEC60950-1:2005, 2nd Edition + AM 2:2013 EN60950-1:2006 + AM2:2013
EAC	RU-AT.49.09571	TP TC 004/2011
RoHS2		RoHS 2011/65/EU + AM2015/863

**EMC Compliance**

EMC Compliance	Condition	Standard / Criterion
Electromagnetic compatibility of multimedia equipment - Emission requirements	with external filter (see filter suggestion below)	EN55032, Class A and B

**EMC Filter Suggestion according to EN55032**

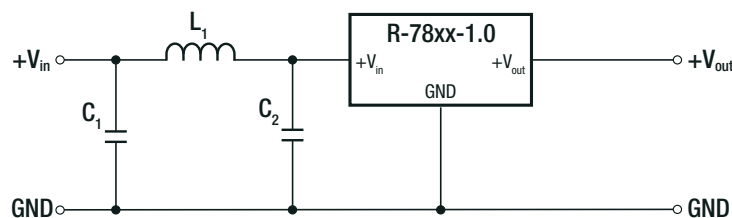

**Component List Class A**

MODEL	C1	C2	L1
R-78E3.3-1.0	10µF	10µF	<a href="#">12µH choke</a>
R-78E5.0-1.0	100V MLCC	100V MLCC	<a href="#">RLS-126</a>
R-78E12-1.0/X9	10µF 50V MLCC	10µF 50V MLCC	5.6µH choke <a href="#">RLS-567</a>

**Component List Class B**

MODEL	C1	C2	L1
R-78E3.3-1.0	10µF	2.2µF	68µH choke
R-78E5.0-1.0	100V MLCC	100V MLCC	<a href="#">RLS-686</a>
R-78E12-1.0	10µF 50V MLCC	10µF 50V MLCC	100µH choke <a href="#">RLS-105</a>

**Notes:**

Note5: Filter suggestions are valid for indicated part numbers only. For other part numbers, please contact RECOM tech support for advice

Specifications (measured at Ta= 25°C, full load, Vin= 24VDC and after warm-up)

DIMENSION and PHYSICAL CHARACTERISTICS			
Parameter	Condition		Value
Material	case		non-conductive black plastic, (UL94 V-0)
	potting	3.3, 5Vout 12Vout	silicone, (UL94 V-0) epoxy, (UL94 V-0)
Package Dimension (LxWxH)			11.6 x 8.5 x 10.4mm
Package Weight			2g typ.

**Dimension Drawing (mm)**

**Pin Connections**

Pin #	Function
1	+Vin
2	GND
3	+Vout

Tolerance: xx.x= ±0.50mm  
xx.xx= ±0.25mm

**Recommended Footprint Details**



INSTALLATION AND APPLICATION	
<b>Standard Application</b>	
<p><b>Notes:</b></p> <p>Note6: The R-78Exx-1.0 can not be used as positive to negative converter</p>	
<p>To protect the converter during power-up, use soft start power supply.</p>	

PACKAGING INFORMATION		
Parameter	Type	Value
Packaging Dimension (LxWxH)	tube	520.0 x 11.2 x 18.2mm
Packaging Quantity		42pcs
Storage Temperature Range		-55°C to +125°C

The product information and specifications may be subject to changes even without prior written notice. The product has been designed for various applications; its suitability lies in the responsibility of each customer. The products are not authorized for use in safety-critical applications without RECOM's explicit written consent. A safety-critical application is an application where a failure may reasonably be expected to endanger or cause loss of life, inflict bodily harm or damage property. The applicant shall indemnify and hold harmless RECOM, its affiliated companies and its representatives against any damage claims in connection with the unauthorized use of RECOM products in such safety-critical applications.

## Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

-  [View R-78E5.0-1.0 on WIN SOURCE](#)
-  [Recom Power Information](#)

## Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management