



THE DATASHEET OF DCJ010-TL





DCJ010


Silicon Epitaxial Planar Type Diode

High-Speed Switching Diode

Features

- Rectifier applications.
- Ideally suited for use in hybrid ICs because of ultrasmall-sized package.
- Small interterminal capacitance.

Electrical Connection




1:Anode
2:Cathode
3:Cathode/Anode

Package Dimensions

unit: mm

1246A





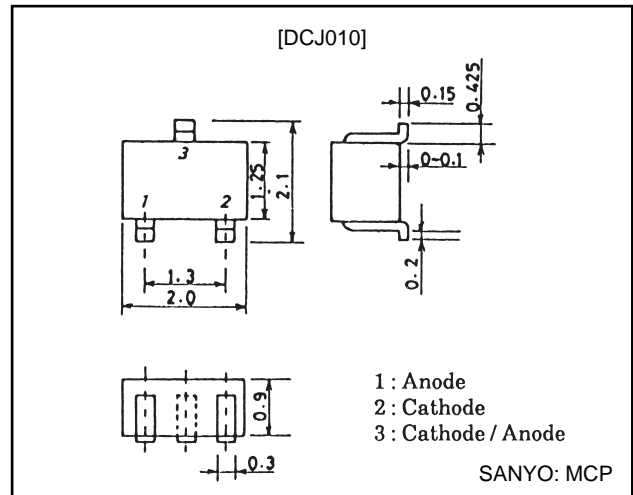


Absolute Maximum Ratings at Ta = 25 °C

Parameter	Symbol	Conditions	Ratings	Unit
Peak Reverse Voltage	V_{RM}		20	V
Reverse Voltage	V_R		20	V
Peak Forward Current	I_{FM}		200	mA
Average Rectified Current	I_o		100	mA
Surge Current	I_{FSM}	(1 μ s)	300	mA
Allowable Power Dissipation	P	(Total)	100	mW
Junction Temperature	T_j		125	°C
Storage Temperature	T_{stg}		-55 to +125	°C

Electrical Characteristics Ta = 25 °C

Parameter	Symbol	Conditions	Ratings			Unit
			min	typ	max	
Forward Voltage	V_F	$I_F=10$ mA			1.0	V
Reverse Current	I_R	$V_R=15$ V			0.1	μ A
Interterminal Capacitance	C	$V_R=6$ V, f=1 MHz			4.0	pF

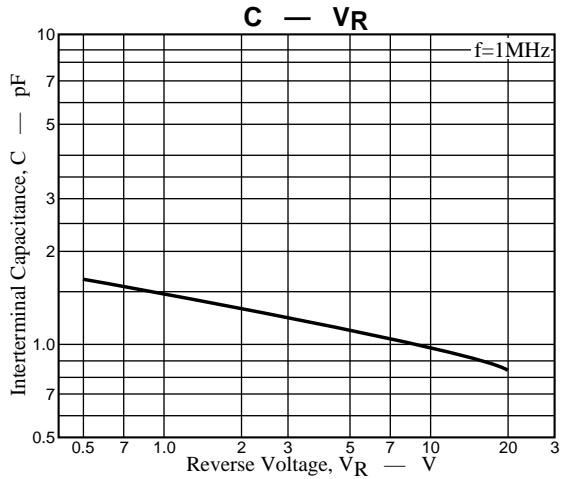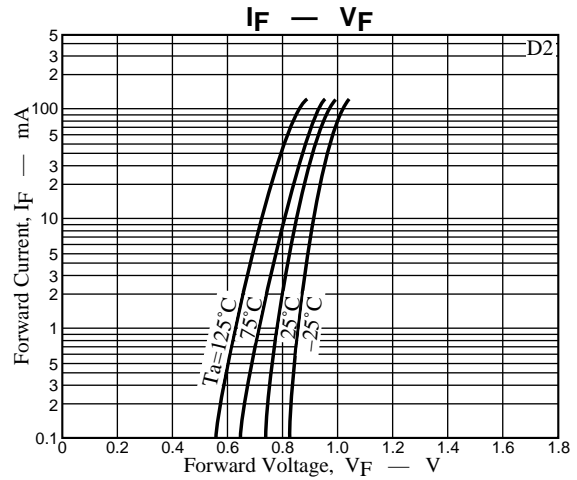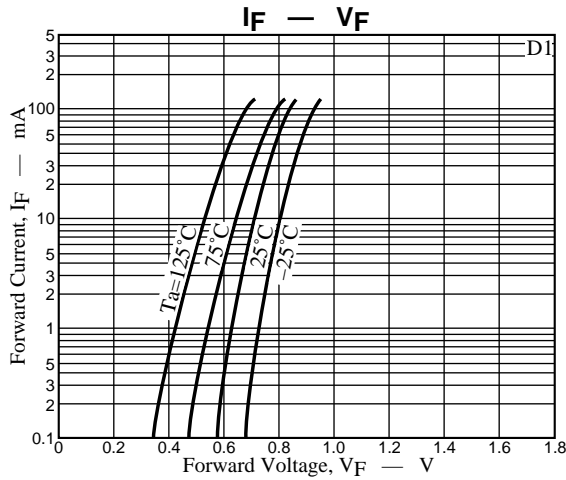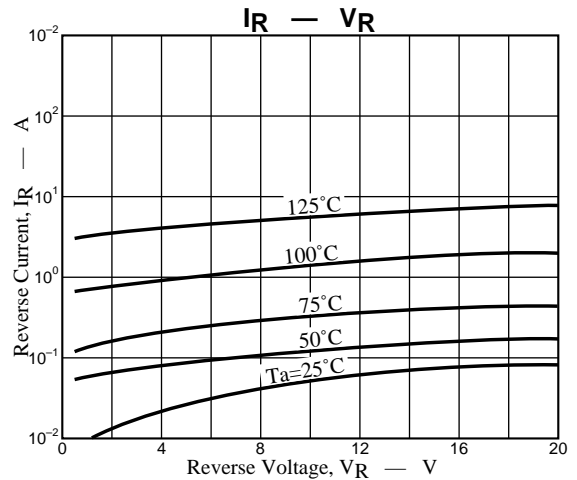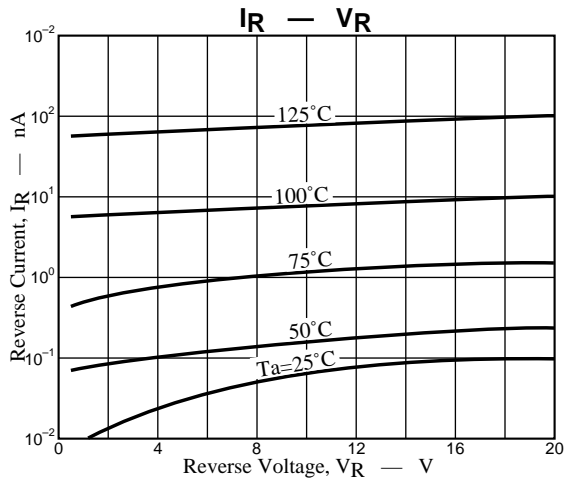

■ No products described or contained herein are intended for use in surgical implants, life-support systems, aerospace equipment, nuclear power control systems, vehicles, disaster/crime-prevention equipment and the like, the failure of which may directly or indirectly cause injury, death or property loss.

- Anyone purchasing any products described or contained herein for an above-mentioned use shall:
- ① Accept full responsibility and indemnify and defend SANYO ELECTRIC CO., LTD., its affiliates, subsidiaries and distributors and all their officers and employees, jointly and severally, against any and all claims and litigation and all damages, cost and expenses associated with such use:
 - ② Not impose any responsibility for any fault or negligence which may be cited in any such claim or litigation on SANYO ELECTRIC CO., LTD., its affiliates, subsidiaries and distributors or any of their officers and employees jointly or severally.

■ Information (including circuit diagrams and circuit parameters) herein is for example only; it is not guaranteed for volume production. SANYO believes information herein is accurate and reliable, but no guarantees are made or implied regarding its use or any infringements of intellectual property rights or other rights of third parties.

This catalog provides information as of May, 1997. Specifications and information herein are subject to change without notice.

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

- ⊖ [View DCJ010-TL on WIN SOURCE](#)
- ⊖ [ON Semiconductor Information](#)

Optimize Your Supply Chain with WIN SOURCE Solutions

- ✓ Global Sourcing Solution
- ✓ Obsolete Management
- ✓ Cost Control Management
- ✓ Shortage Management
- ✓ Alternative Solution
- ✓ Excess Inventory Management