



**THE DATASHEET OF
9H03200034**



Features

- Frequency range : 32.768 kHz
- SMD : Ceramic package
- External dimensions (mm)
L : 3.2 x W : 1.5 x H : 0.75
- RoHS compliant & Pb free


Applications

- Small mobile devices
- Communication devices
- Consumer products
- Commercial & industrial applications

Electrical Characteristics

Item	Symbol	9HT10	Conditions
Nominal Frequency	f_0	32.768 kHz	
Frequency Tolerance	$\Delta f/f_0$	$\pm 10\text{ppm}$, $\pm 20\text{ppm}$, $\pm 30\text{ppm}$, $\pm 50\text{ppm}$	at 25°C
Load Capacitance	C_L	6pF, 7pF, 9pF, 12.5pF	
Operating Temperature Range	T_{OTR}	-40°C ~ +85°C	
		-40°C ~ +125°C	
Storage Temperature Range	T_{STR}	-55°C ~ +125°C	
Turnover Temperature	T_M	25°C \pm 5°C	
Temperature Coefficient	β	-0.04 ppm/°C ² Max.	
Motional Capacitance	C_1	3.1 fF Typ.	
Motional Resistance (ESR)	R_1	70 kΩ Max.	at 25°C
Drive Level	D_L	0.1μW Typ. / 1.0μW Max.	
Aging	$\Delta f/f_0$	± 3 ppm Max.	at 25°C \pm 3°C, first year
Shunt Capacitance	C_0	1.0 pF Typ.	

Dimensions

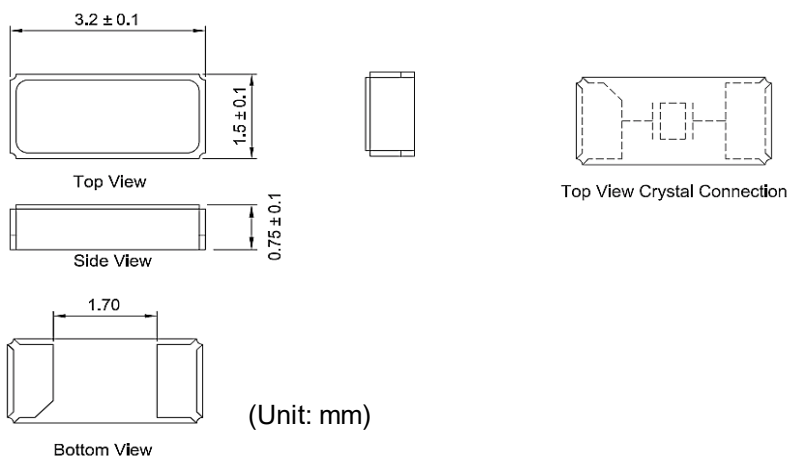

Ordering Information

9HT10 - 32.768K D Z F - T

Frequency Tolerance (at 25°C)	
B	± 50 ppm
A	± 30 ppm
D	± 20 ppm
E	± 10 ppm

Operating Temperature Range	
Z	-40°C ~ +85°C
W	-40°C ~ +125°C

Packaging Method	
T	Tape & Reel

Load Capacitance	
B	6 pF
Y	7 pF
C	9 pF
F	12.5 pF


Packing

Note:1 Po
 Note:2 P2
 Do
 B
 E
 Note:2 F
 W
 A
 A
 P1
 D1
 B
 B0
 5'(max)
 Ko
 B-B SECTION
 W
 W1
 L1
 L
 Ao = 1.8 ± 0.10 mm
 Bo = 3.5 ± 0.10 mm
 Ko = 1.0 ± 0.10 mm
 A-A SECTION
 5'(max)
 Ao
 2.5^{+0.5}
 ø13.2±0.5
 (Unit: mm)

CARRIER TAPE DIMENSIONS		K1	P0	P1	P2	D0	D1	E	F	10P0	W	T
		-	4	4	2	1.55	1.1	1.75	5.5	40	12	0.25

REEL DIMENSIONS		W	W1	L	L1
		16±1.4	13±0.3	180+0/-3	60.2±0.5

Reflow Profile

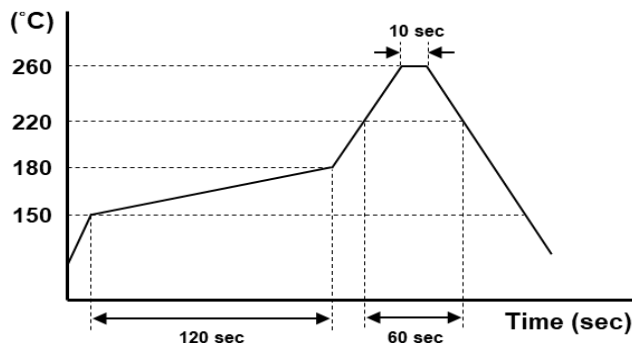

Total time : Max. 200 sec.
Solder melting point : 220°C

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

 [View 9H03200034](#) on WIN SOURCE

 [TXC CORPORATION](#) Information

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management