



**THE DATASHEET OF  
ABM10-18.432MHZ-E20-T**



# CERAMIC SMD ULTRA MINIATURE QUARTZ CRYSTAL



2.5 x 2.0 x 0.5 mm

**ABM10**

Moisture Sensitivity Level (MSL) – This product is Hermetically Sealed and not Moisture Sensitive - MSL = N/A: Not Applicable **Pb** | RoHS/RoHS II Compliant

## FEATURES:

- 2.5 x 2.0 x 0.5mm ultra miniature package
- Suitable for RoHS reflow profile
- Tight stability available  $\pm 10$ ppm over -10 to +60°C
- Seam sealed ceramic package assures high precision and reliability

## APPLICATIONS:

- Blue-tooth, Wireless applications
- Computers, Modems, Microprocessors
- Communication, Test equipment
- High density applications
- PCMCIA
- Portable radios and MP3 players


## STANDARD SPECIFICATIONS:

| Parameters  | Minimum           | Typical | Maximum  | Units      | Notes                                    |
|---|-------------------|---------|----------|------------|--|
| Frequency Range   | 12.000            |         | 55.000   | MHz        | Fundamental                              |
| Operation Mode  | Fundamental       |         |          |            |  |
| Operating Temperature   | -10               |         | +60      | °C         | See options                              |
| Storage Temperature   | -40               |         | +125     | °C         |  |
| Frequency Tolerance @+25°C  |                   |         | $\pm 20$ | ppm        | See options                              |
| Frequency Stability over the Operating Temperature ( ref. to +25°C) |                   |         | $\pm 30$ | ppm        | See options                              |
| Equivalent series resistance (R1)                                   | See table 1 below |         |          |            |  |
| Shunt capacitance (C0)  |                   |         | 7        | pF         |  |
| Load capacitance (CL)   | 10                |         |          | pF         | Standard (See options if other than STD) |
| Drive Level   |                   | 10      | 100      | $\mu$ W    |  |
| Aging@25°C $\pm 3$ °C   |                   |         | $\pm 5$  | ppm        | First year                               |
| Insulation Resistance   | 500               |         |          | M $\Omega$ | @ 100Vdc $\pm 15$ V                      |

Table 1 – standard ESR

| Frequency (MHz) | ESR( $\Omega$ ) max. |
|-----------------|----------------------|
| 12.000 – 15.999 | 250                  |
| 16.000 – 19.999 | 150                  |
| 20.000 – 29.999 | 100                  |
| 30.000 – 55.000 | 70                   |

## OPTIONS & PART IDENTIFICATION: (Left blank if standard)

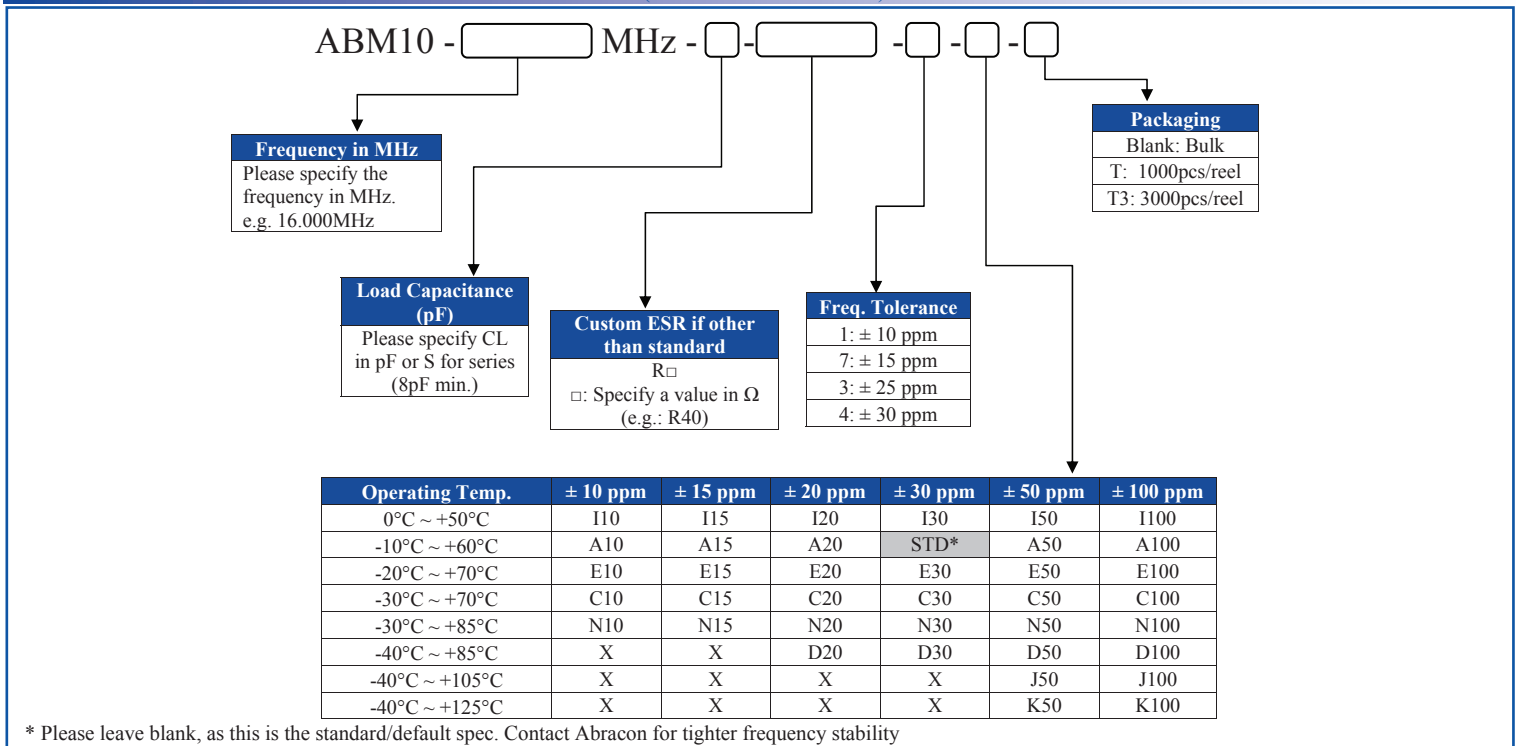

\* Please leave blank, as this is the standard/default spec. Contact Abracon for tighter frequency stability



## Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

- ⊖ [View ABM10-18.432MHZ-E20-T on WIN SOURCE](#)
- ⊖ [Abracon LLC Information](#)

## Optimize Your Supply Chain with WIN SOURCE Solutions

- ✓ Global Sourcing Solution
- ✓ Obsolete Management
- ✓ Cost Control Management
- ✓ Shortage Management
- ✓ Alternative Solution
- ✓ Excess Inventory Management