




THE DATASHEET OF
5700100111F



2mm
LED CBI® Circuit Board Indicator
(DIN 41494 Compatible), Tri-Level

Dialight
570-0100-xxx

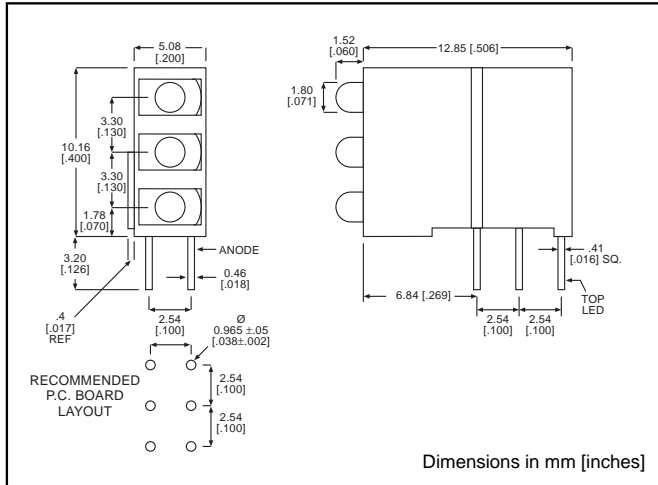

PART NO.

COLOR*

- 570-0100-111 Red-Red-Red
 570-0100-132 Red-Yellow-Green
 570-0100-222 Green-Green-Green
 570-0100-333 Yellow-Yellow-Yellow
 * Top-Middle-Bottom LED

3


Features

- Designed to accommodate DIN 41494
- Multiple CBIs form horizontal LED arrays on 5.08mm (0.200") center-lines
- High Contrast, UL 94 V-0 rated, black housing
- Oxygen index: 29%
- Polymer content: PBT, 0.595 g
- Housing stand-offs facilitate PCB cleaning
- Solderability per MIL-STD-202F, method 208F
- LEDs are safe for direct viewing per IEC 825-1, EN- 60825-1

Custom Combinations

- Contact factory for information on custom color combinations.

EXAMPLE OF PART NUMBER ORDERING CODE

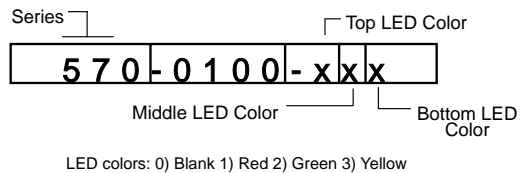

Tolerance note: As noted, otherwise:

- LED Protrusion: ±0.04 mm [±0.016]
- CBI Housing: ±0.02mm[±0.008]

Typical Operating Characteristics ($T_A = 25^\circ\text{C}$) *See LED data sheet for additional information*
GENERAL PURPOSE *See Page 3-17 and 3-18 for Reference Only LED Drive Circuit Examples*
See Page 3-19 for Pin Out


Part Number	Color	Peak Wavelength nm	I_V^* mcd	V_F^{**} Volts	Viewing Angle $2\theta_{1/2}$	LED Data sheet	Page #
570-0100-xxx	Red	635	12.6	2	38°	521-9630	3-13
	Green	565	8.7	2.1	38°	521-9632	3-13
	Yellow	585	12.6	2.1	38°	521-9631	3-13

* $I_F = 10 \text{ mA}$ ** $I_F = 20 \text{ mA}$

2mm Discrete LED Diffused

Dialight

521-9630, -9631, -9632

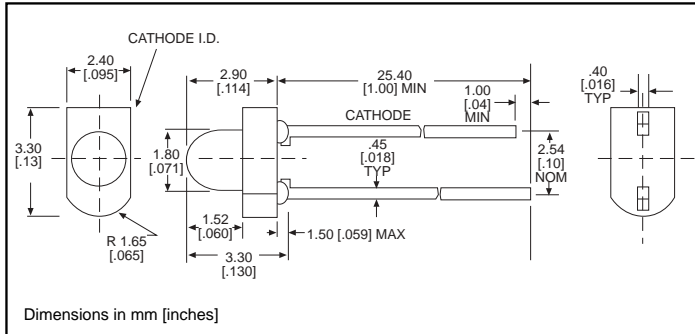

PART NO.	COLOR
521-9630	Red
521-9631	Yellow
521-9632	Green

3

ABSOLUTE MAXIMUM RATINGS (T_A=25°C)

	Red -9630	Yellow -9631	Green -9632
Power Dissipation (mW)	100	60	100
Forward Current (mA)	30	20	30
Derating (mA/°C) From 25°C	.4	.25	.4
Peak Current (mA) Pulse width = 10μs	120	80	120
Operating Temperature (°C)	-55/+100	-55/+100	-55/+100
Storage Temperature (°C)	-55/+100	-55/+100	-55/+100
Soldering Temperature	260°C, 5 seconds, 1.6 mm from case		

OPERATING CHARACTERISTICS (T_A=25°C)

		Red -9630	Yellow -9631	Green -9632
Luminous Intensity (mcd)	Min.	3.7	3.7	2.5
	Typical	12.6	12.6	8.7
Peak Wavelength (nm)	Typical	635	585	565
Viewing Angle (2θ _{1/2})	Typical	38°	38°	38°
Forward Voltage (V)	Typical	2	2.1	2.1
	Max.	2.8	2.8	2.8
Reverse Voltage (V), I _R =100μA	Min.	5	5	5

θ_{1/2} is the off axis angle at which the luminous intensity is half the axial luminous intensity





Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

 [View 5700100111F on WIN SOURCE](#)

 [Dialight Information](#)

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management