



**THE DATASHEET OF
OSTTE020161**



Transfer or duplication of this document as well as the utilisation or communication of its content are not permitted unless express consent is granted. Violations give rise to claims for damages. All rights reserved in case of patent, utility model or design patent registrations.

Technical data






1. Nominal voltage: 1000VAC
2. Connection class: AWG 26-16
3. Insulation withstanding voltage: AC 1600V/Min
4. Insulation Resistance: 1000MΩ or more
5. Tightening torque: 2.0kgf.cm (0.2N.m)
6. Screw thread: M3
7. Stripping length: 3.5mm
8. Operating temperature range: -40°C to +105°C
9. Undimensions: See drawing

Dim.L=P×3.5
 Dim.B=(P-1)×3
 P= number of positions

0-30mm over 30mm-60mm over 60mm-90mm over 90mm

10. Safety approval: CE, RoHS
11. RoHS Compliance: Yes

Part No.: OSTT-3.5

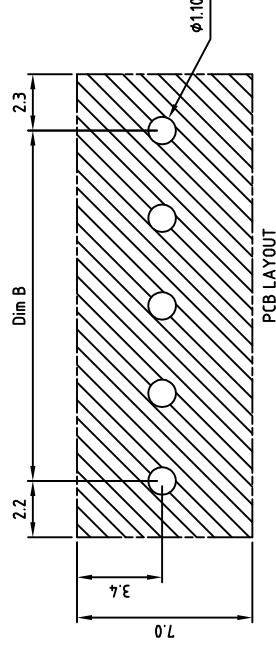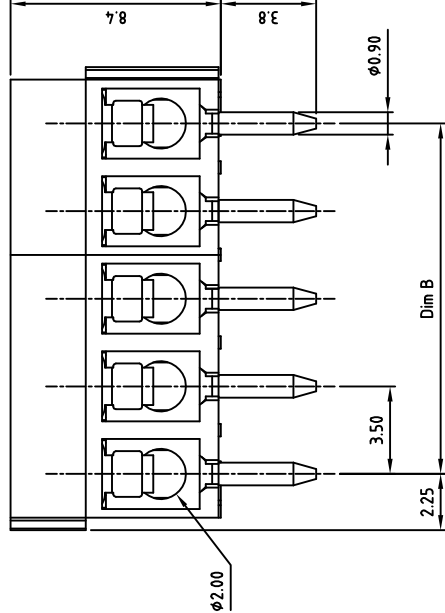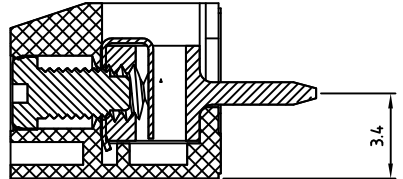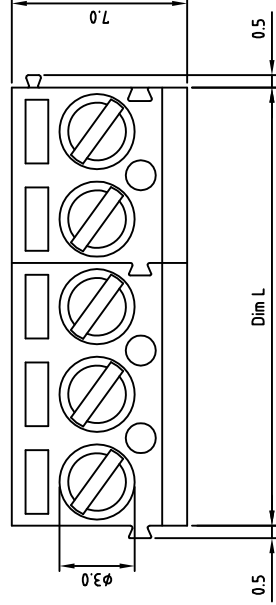



△	SIGN	DESCRIPTION	CHK.	DATE
---	------	-------------	------	------

4	WIRE GUARD	Stainless steel	
3	SCREW	STEEL	
2	CAGE	BRASS	
1	BODY	PA66 UL94V-0	
ITEM	NAME OF PART	MA	
DWG.	WF: Zhang	DATE	2015.11.23
CHK.		DATE	
APP.		DATE	

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

-  [View OSTTE020161 on WIN SOURCE](#)
-  [On Shore Technology Inc. Information](#)

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management