


LOC	DIST	7	TYPE
CM	00		A
			B

D

△ 2.54 μm MIN BRIGHT TIN/LEAD
 MIN NICKEL ENTIRE STOCK.

△ 0.38 μm MIN GOLD IN LOCALIZED
 MIN BRIGHT TIN/LEAD IN LOCALIZED
 BOTH OVER 1.27 μm MIN NICKEL

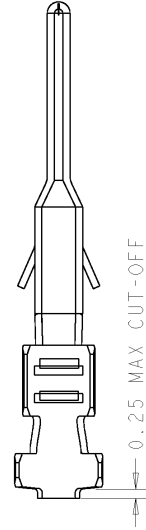

0.25 MAX CUT-OFF

C


△ 0.76 μm MIN GOLD IN LOCALIZED
 MIN BRIGHT TIN/LEAD IN LOCALIZED
 BOTH OVER 1.27 μm MIN NICKEL

4. WIRE RANGE 20-24 AWG.

5. INSULATION RANGE 0.89-1.52

△ 2.54 μm MIN BRIGHT TIN ENTIRE
 ENTIRE STOCK.


2.00 MIN LOCALIZED
 TIN/LEAD PLATE AREA △/3

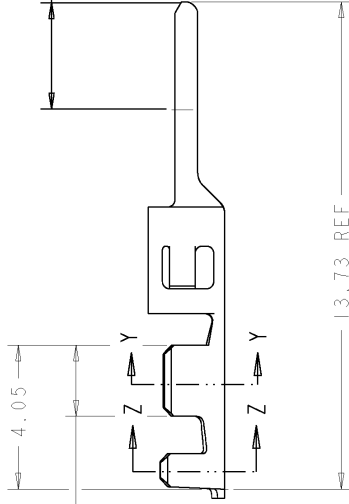


3.00 MIN LOCALIZED
 GOLD PLATE AREA △/3

B

2.48



SECTION Z-Z
 SCALE 20:1



A

METRIC

THIS DRAWING IS UNPUBLISHED. ALL RIGHTS RESERVED. THIS DRAWING IS UNPUBLISHED. ALL RIGHTS RESERVED.		DRN	J. RUDY	29AU0
DIMENSIONS:		CHKD	W. DAVIS	29AU0
mm		APPD	W. DAVIS	29AU0
		PRODUCT SPEC		
		APPLICATION SPEC		
		WEIGHT		
MATERIAL	0.20 THK			
	BRASS			
				CUSTOMER DRAWING

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

 [View 1-794612-0 on WIN SOURCE](#)

 [TE Connectivity](#) Information

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management