





THE DATASHEET OF SMA6F11A





Unidirectional

Features

- Peak pulse power: 600 W (10/1000 μ s) and 4 kW (8/20 μ s)
- Stand-off voltage range from 5 V to 188 V
- Unidirectional type
- Low leakage current: 0.2 μ A at 25 °C and 1 μ A at 85 °C
- Operating T_j max: 175 °C
- High power capability at T_j max.: up to 400 W (10/1000 μ s)
- Lead finishing: matte tin plating

Complies with the following standards

- UL94, V0
- J-STD-020 MSL level 1
- J-STD-002, JESD 22-B102 E3 and MIL-STD-750, method 2026
- JESD-201 class 2 whisker test
- IPC7531 footprint and JEDEC registered package outline
- IEC 61000-4-2, C = 150 pF - R = 330 Ω exceeds level 4:
 - 25 kV (contact discharge)
 - 30 kV (air discharge)

Description

The SMA6F Transil series are designed to protect sensitive circuits against transient surges.

The planar technology makes it compatible with high-end circuits where low leakage current and high junction temperature are required to provide long term reliability and stability.

| Product status link | |
|---------------------|---|
| SMA6F | SMA6F5.0A , SMA6F6.0A , SMA6F6.5A , SMA6F8.5A , SMA6F10A , SMA6F11A , SMA6F12A , SMA6F13A , SMA6F14A , SMA6F15A , SMA6F16A , SMA6F18A , SMA6F20A , SMA6F22A , SMA6F23A , SMA6F24A , SMA6F26A , SMA6F28A , SMA6F30A , SMA6F31A , SMA6F33A , SMA6F36A , SMA6F40A , SMA6F48A , SMA6F58A , SMA6F70A , SMA6F85A , SMA6F100A , SMA6F130A , SMA6F154A , SMA6F170A , SMA6F188A |

1 Characteristics

Table 1. Absolute maximum ratings ($T_{amb} = 25\text{ }^{\circ}\text{C}$)

| Symbol | Parameter | Value | Unit | |
|-----------|--|---|--------------------|----|
| V_{PP} | Peak pulse voltage | IEC 61000-4-2 (C = 150 pF, R = 330 Ω) | | |
| | | Contact discharge | 25 | kV |
| | | Air discharge | 30 | |
| P_{PP} | Peak pulse power dissipation | 10/1000 μs , T_j initial = T_{amb} | 600 | W |
| T_{stg} | Storage temperature range | -65 to +175 | $^{\circ}\text{C}$ | |
| T_j | Operating junction temperature range | -55 to +175 | $^{\circ}\text{C}$ | |
| T_L | Maximum lead temperature for soldering during 10 s | 260 | $^{\circ}\text{C}$ | |

Figure 1. Electrical characteristics - parameter definitions



Figure 2. Pulse definition for electrical characteristics



Table 2. Electrical characteristics - parameter values ($T_{amb} = 25\text{ }^{\circ}\text{C}$, unless otherwise specified)

| Type | I_{RM} max at V_{RM} | | | V_{BR} at I_R | | | | 10 / 1000 μs | | | 8 / 20 μs | | | $\alpha T^{(1)(2)}$ |
|-----------|--------------------------|-----------------------|-----|-------------------|------|------|----|-------------------------|----------|----------|----------------------|----------|----------|----------------------------|
| | | | | | | | | $V_{CL}^{(3)}$ | I_{PP} | R_D | $V_{CL}^{(3)}$ | I_{PP} | R_D | |
| | 25 $^{\circ}\text{C}$ | 85 $^{\circ}\text{C}$ | | Min. | Typ. | Max. | | Max. | | Max. | Max. | Max. | Max. | |
| | μA | V | | V | | | mA | V | A | Ω | V | A | Ω | $10^{-4}/^{\circ}\text{C}$ |
| SMA6F5.0A | 20 | 50 | 5.0 | 6.4 | 6.74 | 7.1 | 10 | 9.2 | 68 | 0.031 | 13.4 | 298 | 0.021 | 5.7 |
| SMA6F6.0A | 20 | 50 | 6.0 | 6.7 | 7.05 | 7.4 | 10 | 10.3 | 61 | 0.048 | 13.7 | 290 | 0.022 | 5.9 |
| SMA6F6.5A | 20 | 50 | 6.5 | 7.2 | 7.58 | 8 | 10 | 11.2 | 56 | 0.057 | 14.5 | 276 | 0.024 | 6.1 |
| SMA6F8.5A | 20 | 50 | 8.5 | 9.4 | 9.9 | 10.4 | 1 | 14.4 | 41.7 | 0.096 | 19.5 | 205 | 0.044 | 7.3 |
| SMA6F10A | 0.2 | 1 | 10 | 11.1 | 11.7 | 12.3 | 1 | 17 | 37 | 0.127 | 21.7 | 184 | 0.051 | 7.8 |
| SMA6F11A | 0.2 | 1 | 11 | 12.3 | 13 | 13.7 | 1 | 18 | 33.8 | 0.127 | 24.2 | 165 | 0.064 | 8.1 |
| SMA6F12A | 0.2 | 1 | 12 | 13.3 | 14 | 14.7 | 1 | 19.9 | 31 | 0.168 | 25.3 | 157 | 0.068 | 8.3 |
| SMA6F13A | 0.2 | 1 | 13 | 14.4 | 15.2 | 16 | 1 | 21.5 | 29 | 0.190 | 27.2 | 147 | 0.076 | 8.4 |
| SMA6F14A | 0.2 | 1 | 14 | 15.7 | 16.5 | 17.3 | 1 | 23.1 | 26 | 0.223 | 29 | 136 | 0.086 | 8.6 |
| SMA6F15A | 0.2 | 1 | 15 | 16.7 | 17.6 | 18.5 | 1 | 24.4 | 25.1 | 0.235 | 32.5 | 123 | 0.114 | 8.8 |
| SMA6F16A | 0.2 | 1 | 16 | 17.9 | 18.8 | 19.8 | 1 | 26 | 23.1 | 0.268 | 34.7 | 115 | 0.130 | 9.0 |
| SMA6F18A | 0.2 | 1 | 18 | 20 | 21.1 | 22.2 | 1 | 29.2 | 21.5 | 0.326 | 39.3 | 102 | 0.168 | 9.2 |
| SMA6F20A | 0.2 | 1 | 20 | 22.2 | 23.4 | 24.6 | 1 | 32.4 | 19.4 | 0.402 | 42.8 | 93 | 0.196 | 9.4 |
| SMA6F22A | 0.2 | 1 | 22 | 24.4 | 25.7 | 27 | 1 | 35.5 | 17.7 | 0.480 | 48.3 | 83 | 0.257 | 9.6 |
| SMA6F23A | 0.2 | 1 | 23 | 25.7 | 27 | 28.4 | 1 | 37.8 | 16.4 | 0.573 | 49.2 | 81 | 0.257 | 9.6 |
| SMA6F24A | 0.2 | 1 | 24 | 26.7 | 28.1 | 29.5 | 1 | 38.9 | 16 | 0.588 | 50 | 80 | 0.256 | 9.6 |
| SMA6F26A | 0.2 | 1 | 26 | 28.9 | 30.4 | 31.9 | 1 | 42.1 | 14.9 | 0.685 | 53.5 | 75 | 0.288 | 9.7 |
| SMA6F28A | 0.2 | 1 | 28 | 31.1 | 32.7 | 34.3 | 1 | 45.4 | 13.8 | 0.804 | 59 | 68 | 0.363 | 9.8 |
| SMA6F30A | 0.2 | 1 | 30 | 33.2 | 35 | 36.8 | 1 | 48.4 | 13 | 0.885 | 64.3 | 62 | 0.442 | 9.9 |
| SMA6F31A | 0.2 | 1 | 31 | 34.2 | 36 | 37.8 | 1 | 50.2 | 12.3 | 1.01 | 65 | 61 | 0.45 | 9.9 |
| SMA6F33A | 0.2 | 1 | 33 | 36.7 | 38.6 | 40.5 | 1 | 53.3 | 11.8 | 1.08 | 69.7 | 57 | 0.512 | 10 |
| SMA6F36A | 0.2 | 1 | 36 | 40 | 42.1 | 44.2 | 1 | 58.1 | 10.3 | 1.35 | 76 | 52 | 0.612 | 10 |
| SMA6F40A | 0.2 | 1 | 40 | 44.4 | 46.7 | 49 | 1 | 64.5 | 9.7 | 1.60 | 84 | 48 | 0.729 | 10.1 |
| SMA6F48A | 0.2 | 1 | 48 | 53.2 | 56 | 58.8 | 1 | 77.4 | 8.1 | 2.28 | 100 | 40 | 1.03 | 10.3 |
| SMA6F58A | 0.2 | 1 | 58 | 64.6 | 68 | 71.4 | 1 | 93.6 | 6.7 | 3.34 | 121 | 33 | 1.51 | 10.4 |
| SMA6F70A | 0.2 | 1 | 70 | 77.9 | 82 | 86.1 | 1 | 113 | 5.5 | 4.91 | 146 | 27 | 2.22 | 10.5 |
| SMA6F85A | 0.2 | 1 | 85 | 95 | 100 | 105 | 1 | 137 | 4.6 | 7.17 | 178 | 22.5 | 3.29 | 10.6 |
| SMA6F100A | 0.2 | 1 | 100 | 111 | 117 | 123 | 1 | 162 | 3.8 | 10.3 | 212 | 19 | 4.68 | 10.7 |
| SMA6F130A | 0.2 | 1 | 130 | 144 | 152 | 160 | 1 | 209 | 3 | 16.3 | 265 | 15 | 7 | 10.8 |
| SMA6F154A | 0.2 | 1 | 154 | 171 | 180 | 189 | 1 | 246 | 2.4 | 23.8 | 317 | 12.6 | 10.2 | 10.8 |
| SMA6F170A | 0.2 | 1 | 170 | 190 | 200 | 210 | 1 | 275 | 2.2 | 30 | 353 | 11.3 | 12.7 | 10.8 |
| SMA6F188A | 0.2 | 1 | 188 | 209 | 220 | 231 | 1 | 328 | 2 | 48.5 | 388 | 10.3 | 15.2 | 10.8 |

- To calculate V_{BR} versus T_j : V_{BR} at $T_j = V_{BR}$ at $25\text{ }^{\circ}\text{C} \times (1 + \alpha T \times (T_j - 25))$
- To calculate V_{CL} versus T_j : V_{CL} at $T_j = V_{CL}$ at $25\text{ }^{\circ}\text{C} \times (1 + \alpha T \times (T_j - 25))$
- To calculate V_{CLmax} versus $I_{PPappli}$: $V_{CLmax} = V_{BRmax} + R_D \times I_{PPappli}$

1.1 Characteristics (curves)

Figure 3. Maximum peak power dissipation versus initial junction temperature

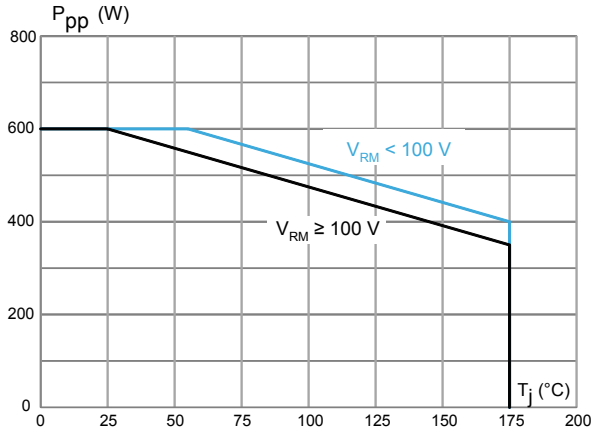


Figure 4. Maximum peak pulse power versus exponential pulse duration

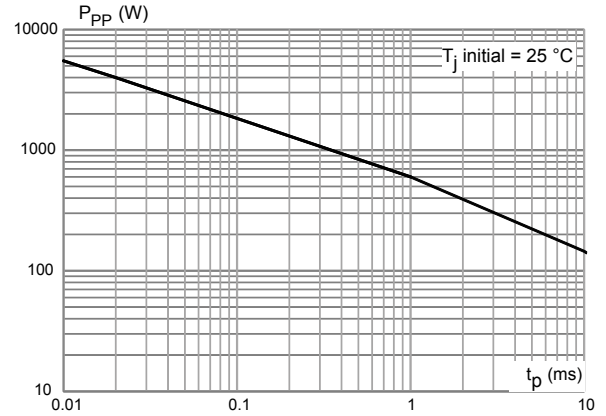


Figure 5. Maximum clamping voltage versus peak pulse current

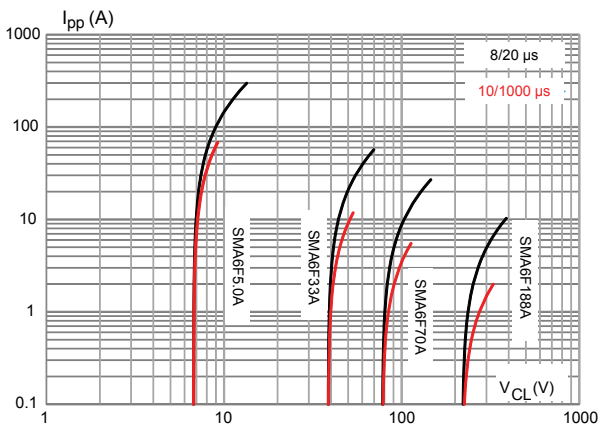


Figure 6. Dynamic resistance versus pulse duration

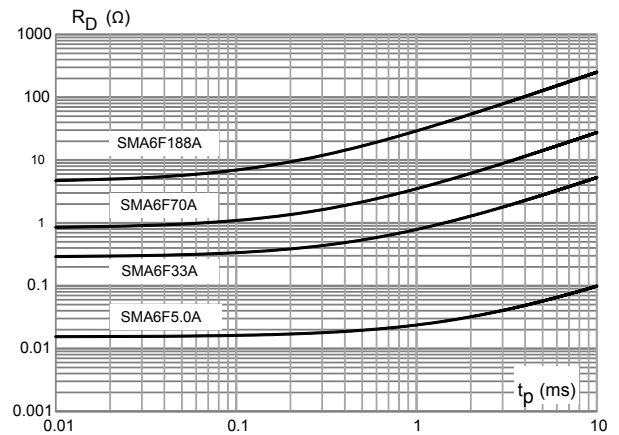


Figure 7. Junction capacitance versus reverse applied voltage

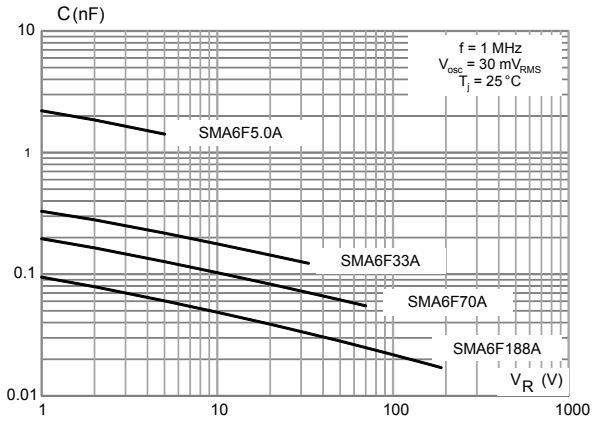


Figure 8. Leakage current versus junction temperature

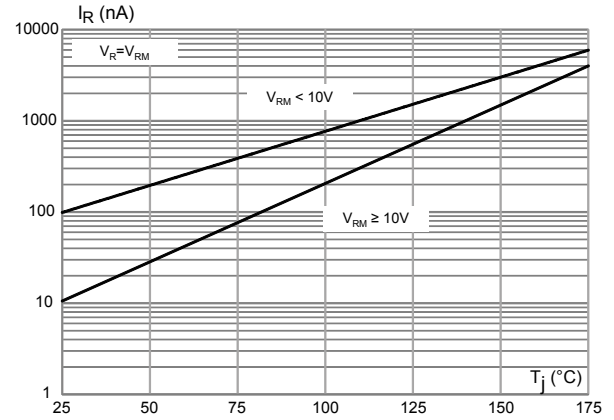


Figure 9. Peak forward voltage drop versus peak forward current

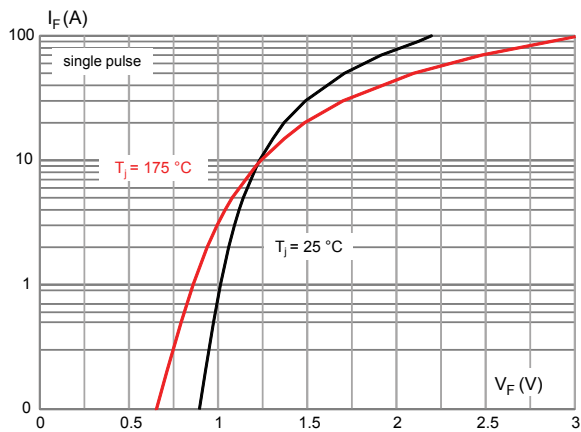


Figure 10. Thermal impedance junction to ambient versus pulse duration


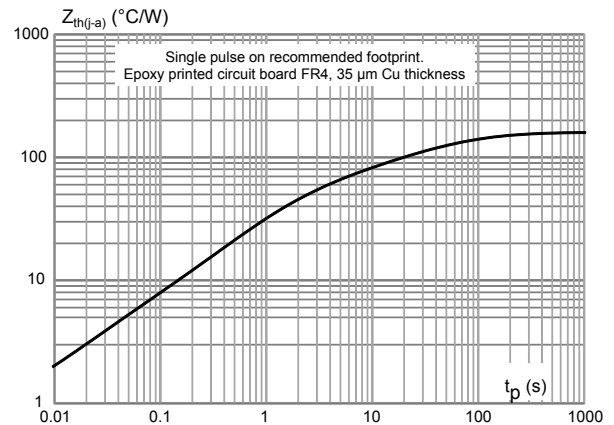


Figure 11. Thermal resistance junction to ambient versus copper area under each lead

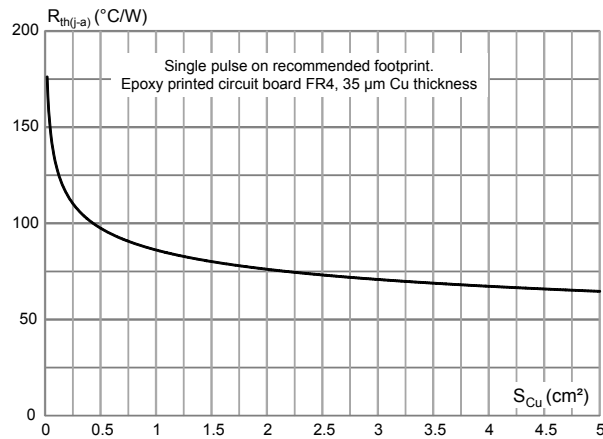

2 Package information

In order to meet environmental requirements, ST offers these devices in different grades of ECOPACK® packages, depending on their level of environmental compliance. ECOPACK® specifications, grade definitions and product status are available at: www.st.com. ECOPACK® is an ST trademark.

2.1 SMA Flat package information

Figure 12. SMA Flat package outline

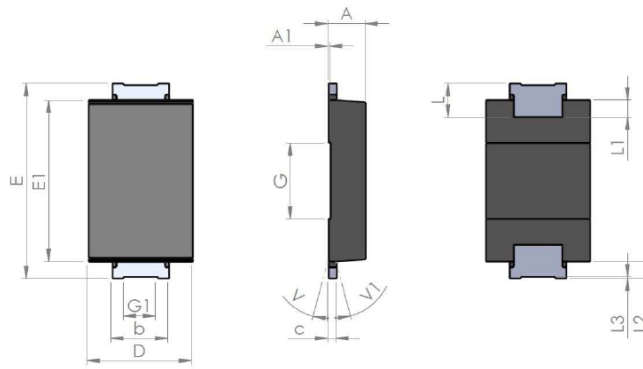


Table 3. SMA Flat mechanical data

| Symbol | Millimeters | | | Inches ⁽¹⁾ | | |
|--------|-------------|------|------|-----------------------|-------|-------|
| | Min | Typ | Max | Min | Typ | Max |
| A | 0.90 | | 1.10 | 0.035 | | 0.044 |
| A1 | | 0.05 | | | 0.002 | |
| b | 1.25 | | 1.65 | 0.049 | | 0.065 |
| c | 0.15 | | 0.40 | 0.005 | | 0.016 |
| D | 2.25 | | 2.90 | 0.088 | | 0.115 |
| E | 5.00 | | 5.35 | 0.196 | | 0.211 |
| E1 | 3.95 | | 4.60 | 0.155 | | 0.182 |
| G | | 2.00 | | | 0.079 | |
| G1 | | 0.85 | | | 0.033 | |
| L | 0.75 | | 1.20 | 0.029 | | 0.048 |
| L1 | | 0.45 | | | 0.018 | |
| L2 | | 0.45 | | | 0.018 | |
| L3 | | 0.05 | | | 0.002 | |
| V | | | 8° | | | 8° |
| V1 | | | 8° | | | 8° |

1. Values in inches are converted from mm and rounded to 3 decimal digits.

Figure 13. SMA Flat recommended footprint in mm (inches)

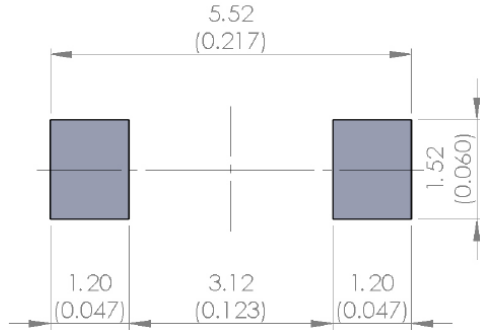


Figure 14. SMA Flat marking


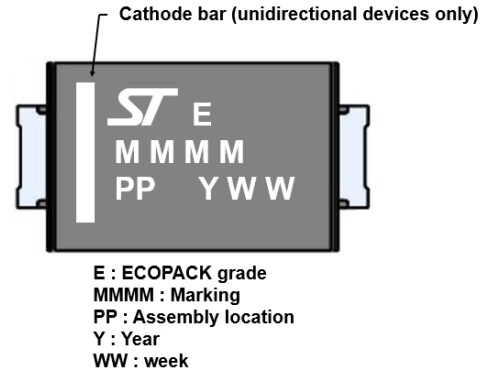


Figure 15. Package orientation in reel

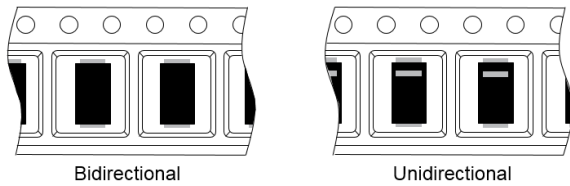

Taped according to EIA-481
Pocket dimensions are not on scale.
Pocket shape may vary depending on package
On bidirectional devices, marking and logo may not be always in the same direction.

Figure 16. Tape and reel orientation

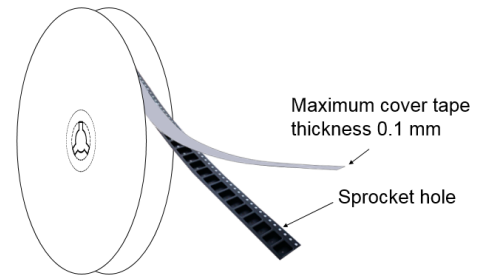


Figure 17. 13" reel dimension values

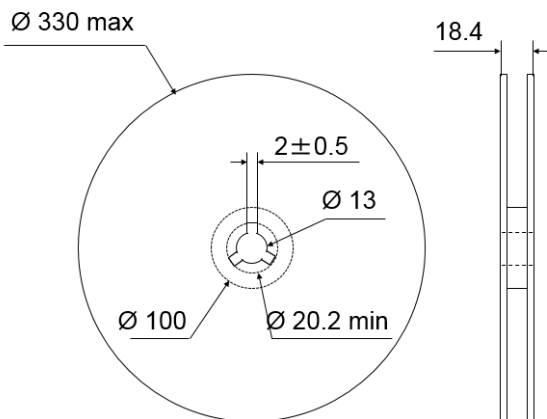


Figure 18. Inner box dimension values


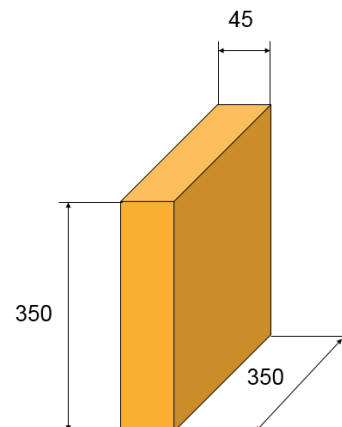


Figure 19. Tape outline

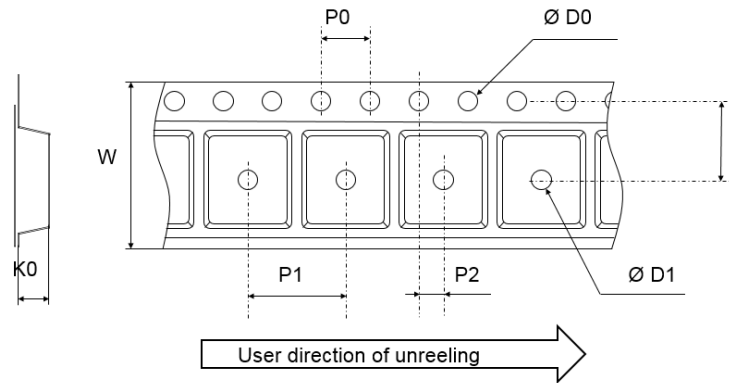


Note: Pocket dimensions are not on scale
Pocket shape may vary depending on package

Table 4. Tape dimension values

| Ref. | Dimensions | | |
|------|-------------|------|------|
| | Millimeters | | |
| | Min. | Typ. | Max. |
| D0 | 1.5 | 1.55 | 1.6 |
| D1 | 1.5 | | |
| F | 5.4 | 5.5 | 5.6 |
| K0 | 1.1 | 1.2 | 1.3 |
| P0 | 3.9 | 4.0 | 4.1 |
| P1 | 3.9 | 4.0 | 4.1 |
| P2 | 1.9 | 2.0 | 2.1 |
| W | 11.7 | 12 | 12.3 |

2.2 Reflow profile

Figure 20. ST ECOPACK® recommended soldering reflow profile for PCB mounting

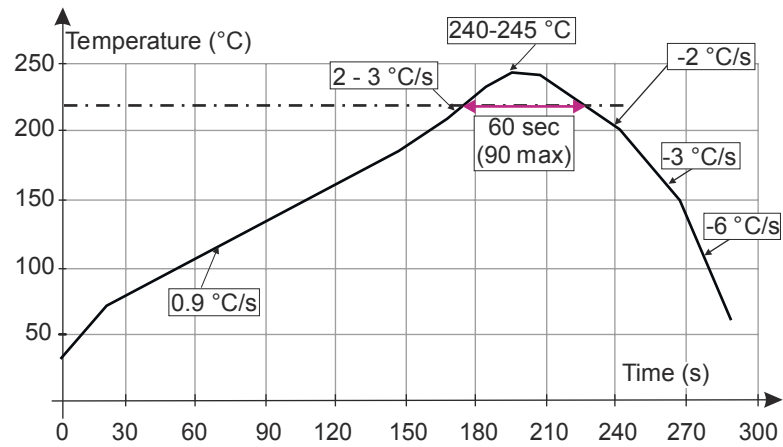

Note: Minimize air convection currents in the reflow oven to avoid component movement. Maximum soldering profile corresponds to the latest IPC/JEDEC J-STD-020.

3 SMA6FxxA Ordering information

Figure 21. Ordering information scheme

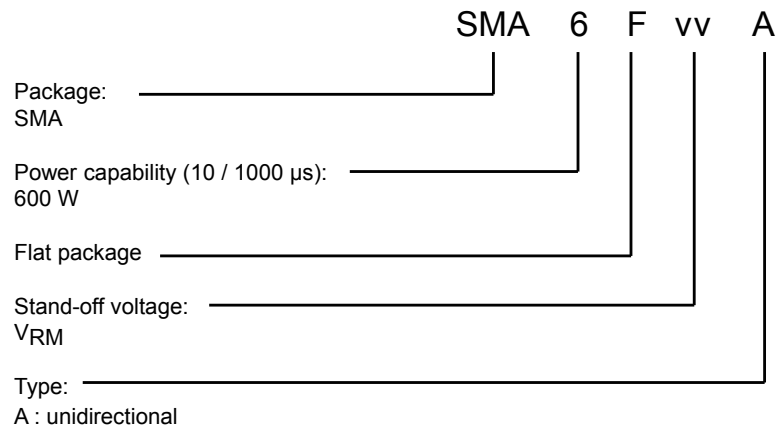


Table 5. Ordering information

| Order code | Marking | Package | Weight | Base qty. | Delivery mode |
|------------|---------------------------------------|----------|--------|-----------|---------------|
| SMA6FxxA | See Table 6. Marking. | SMA Flat | 39 mg | 10000 | Tape and reel |

3.1 Marking

Table 6. Marking

| Unidirectional | |
|----------------|---------|
| Order code | Marking |
| SMA6F5.0A | 6AI |
| SMA6F6.0A | 6AK |
| SMA6F6.5A | 6AL |
| SMA6F8.5A | 6AP |
| SMA6F10A | 6AS |
| SMA6F11A | 6AU |
| SMA6F12A | 6AW |
| SMA6F13A | 6AY |
| SMA6F14A | 6BA |
| SMA6F15A | 6BC |
| SMA6F16A | 6BE |
| SMA6F18A | 6BI |
| SMA6F20A | 6BM |
| SMA6F22A | 6BO |
| SMA6F23A | 6BP |
| SMA6F24A | 6BQ |
| SMA6F26A | 6BS |
| SMA6F28A | 6BU |
| SMA6F30A | 6BW |
| SMA6F31A | 6BX |
| SMA6F33A | 6BZ |
| SMA6F36A | 6CC |
| SMA6F40A | 6CG |
| SMA6F48A | 6CO |
| SMA6F58A | 6CY |
| SMA6F70A | 6DK |
| SMA6F85A | 6DZ |
| SMA6F100A | 6EO |
| SMA6F130A | 6FS |
| SMA6F154A | 6GQ |
| SMA6F170A | 6HG |
| SMA6F188A | 6HY |

Revision history

Table 7. Document revision history

| Date | Version | Changes |
|-------------|---------|--|
| 18-May-2018 | 1 | Initial release. |
| 09-Jul-2018 | 2 | Corrected typo error in Table 2. Electrical characteristics - parameter values ($T_{amb} = 25\text{ }^{\circ}\text{C}$, unless otherwise specified). |
| 28-Feb-2019 | 3 | Updated links syntax. |

IMPORTANT NOTICE – PLEASE READ CAREFULLY

STMicroelectronics NV and its subsidiaries (“ST”) reserve the right to make changes, corrections, enhancements, modifications, and improvements to ST products and/or to this document at any time without notice. Purchasers should obtain the latest relevant information on ST products before placing orders. ST products are sold pursuant to ST’s terms and conditions of sale in place at the time of order acknowledgement.

Purchasers are solely responsible for the choice, selection, and use of ST products and ST assumes no liability for application assistance or the design of Purchasers’ products.

No license, express or implied, to any intellectual property right is granted by ST herein.

Resale of ST products with provisions different from the information set forth herein shall void any warranty granted by ST for such product.



ST and the ST logo are trademarks of ST. All other product or service names are the property of their respective owners.

Information in this document supersedes and replaces information previously supplied in any prior versions of this document.

© 2019 STMicroelectronics – All rights reserved

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

-  [View SMA6F11A on WIN SOURCE](#)
-  [STMicroelectronics Information](#)

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management