



**THE DATASHEET OF  
HA1-5114/883**



**OBSOLETE PRODUCT  
POSSIBLE SUBSTITUTE PRODUCT  
HA1-5104/883 or 5962-8852012A (LCC)**

# HA-5114/883

## Quad, Low Noise, High Performance Uncompensated Operational Amplifier

September 2001

### Features

- This Circuit is Processed in Accordance to MIL-STD-883 and is Fully Conformant Under the Provisions of Paragraph 1.2.1.
- Low Input Noise Voltage Density at 1kHz...  $6\text{nV}/\sqrt{\text{Hz}}$  (Max)  
 $4.3\text{nV}/\sqrt{\text{Hz}}$  (Typ)
- High Slew Rate...  $12\text{V}/\mu\text{s}$  (Min)  
 $20\text{V}/\mu\text{s}$  (Typ)
- Wide Gain Bandwidth Product ( $A_{VCL} \geq 10$ )... 40MHz (Typ)
- High Open Loop Gain (Full Temp) ... 100kV/V (Min)  
250kV/V (Typ)
- High CMRR, PSRR (Full Temp)... 86dB (Min)  
100dB (Typ)
- Low Offset Voltage Drift ...  $3\mu\text{V}/^\circ\text{C}$  (Typ)
- No Crossover Distortion
- Standard Quad Pinout

### Applications

- High Quality Audio Preamplifiers
- High Q Active Filters
- Low Noise Function Generators
- Low Distortion Oscillators
- Low Noise Comparators

### Description

Low noise and high performance are key words describing the quad, uncompensated HA-5114/883. This general purpose amplifier offers an array of dynamic specifications including  $12\text{V}/\mu\text{s}$  slew rate (min), and 40MHz gain-bandwidth-product for  $A_{VCL} \geq 10$ . Complementing these outstanding parameters is a very low noise specification of  $6\text{nV}/\sqrt{\text{Hz}}$  at 1kHz (max).



Fabricated using the Intersil standard high frequency D.I. process, these operational amplifiers also offer excellent input specifications such as 2.5mV (max) offset voltage and 75nA (max) offset current. Complementing these specifications are 100dB (min) open loop gain and 55dB channel separation (min). Economically, HA-5114/883 also consumes a very modest amount of power (225mW/ package), while also saving board space and cost.

This impressive combination of features make this amplifier ideally suited for designs ranging from audio amplifiers and active filters to the most demanding signal conditioning and instrumentation circuits.

### Part Number Information

PART NUMBER	TEMPERATURE RANGE	PACKAGE
HA1-5114/883	-55°C to +125°C	14 Lead CerDIP
HA4-5114/883	-55°C to +125°C	20 Lead Ceramic LCC

### Pinouts

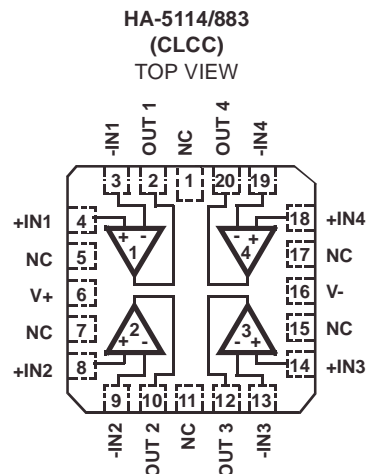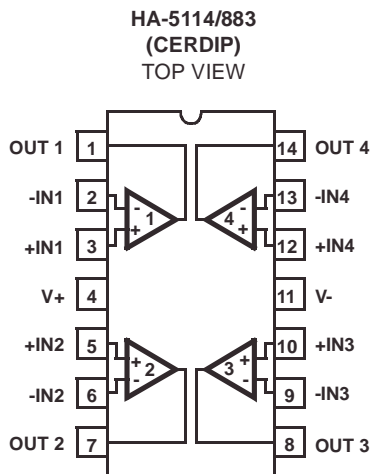

# Specifications HA-5114/883

## Absolute Maximum Ratings

Voltage between V+ and V- Terminals . . . . .	40V
Differential Input Voltage . . . . .	7V
Voltage at Either Input Terminal . . . . .	V+ to V-
Peak Output Current. . . . .	Indefinite (One Amplifier Shorted to Ground)
Junction Temperature (T <sub>J</sub> ) . . . . .	+175°C
Storage Temperature Range . . . . .	-65°C to +150°C
ESD Rating. . . . .	<2000V
Lead Temperature (Soldering 10s). . . . .	+300°C

## Thermal Information

Thermal Resistance	$\theta_{JA}$	$\theta_{JC}$
CerDIP Package . . . . .	75°C/W	20°C/W
Ceramic LCC Package . . . . .	65°C/W	15°C/W
Package Power Dissipation Limit at +75°C		
CerDIP Package . . . . .	1.33W	
Ceramic LCC Package . . . . .	1.54W	
Package Power Dissipation Derating Factor Above +75°C		
CerDIP Package . . . . .	13.3mW/°C	
Ceramic LCC Package . . . . .	15.4mW/°C	

*CAUTION: Stresses above those listed in "Absolute Maximum Ratings" may cause permanent damage to the device. This is a stress only rating and operation of the device at these or any other conditions above those indicated in the operational sections of this specification is not implied.*

## Operating Conditions

Operating Temperature Range. . . . .	-55°C to +125°C	$V_{INCM} \leq 1/2 (V+ - V-)$
Operating Supply Voltage. . . . .	±5V to ±15V	$R_L \geq 2k\Omega$

**TABLE 1. DC ELECTRICAL PERFORMANCE CHARACTERISTICS**

Device Tested at:  $V_{SUPPLY} = \pm 15V$ ,  $R_{SOURCE} = 100\Omega$ ,  $R_{LOAD} = 500k\Omega$ ,  $V_{OUT} = 0V$ , Unless Otherwise Specified.

PARAMETERS	SYMBOL	CONDITIONS	GROUP A SUBGROUPS	TEMPERATURE	LIMITS		UNITS
					MIN	MAX	
Input Offset Voltage	$V_{IO}$	$V_{CM} = 0V$	1	+25°C	-2.5	2.5	mV
			2, 3	+125°C, -55°C	-3.0	3.0	mV
Input Bias Current	+I <sub>B</sub>	$V_{CM} = 0V$ , +R <sub>S</sub> = 10kΩ, -R <sub>S</sub> = 100Ω	1	+25°C	-200	200	nA
			2, 3	+125°C, -55°C	-325	325	nA
	-I <sub>B</sub>	$V_{CM} = 0V$ , +R <sub>S</sub> = 100Ω, -R <sub>S</sub> = 10kΩ	1	+25°C	-200	200	nA
			2, 3	+125°C, -55°C	-325	325	nA
Input Offset Current	I <sub>IO</sub>	$V_{CM} = 0V$ , +R <sub>S</sub> = 10kΩ, -R <sub>S</sub> = 10kΩ	1	+25°C	-75	75	nA
			2, 3	+125°C, -55°C	-125	125	nA
Common Mode Range	+CMR	$V+ = +3V$ , $V- = -27V$	1	+25°C	+12	-	V
			2, 3	+125°C, -55°C	+12	-	V
	-CMR	$V+ = +27V$ , $V- = -3V$	1	+25°C	-	-12	V
			2, 3	+125°C, -55°C	-	-12	V
Large Signal Voltage Gain	+A <sub>VOL</sub>	$V_{OUT} = 0V$ and +10V, R <sub>L</sub> = 2kΩ	4	+25°C	100	-	kV/V
			5, 6	+125°C, -55°C	100	-	kV/V
	-A <sub>VOL</sub>	$V_{OUT} = 0V$ and -10V, R <sub>L</sub> = 2kΩ	4	+25°C	100	-	kV/V
			5, 6	+125°C, -55°C	100	-	kV/V
Common Mode Rejection Ratio	+CMRR	$\Delta V_{CM} = +5V$ , $V+ = +10V$ , $V- = -20V$ , $V_{OUT} = -5V$	1	+25°C	86	-	dB
			2, 3	+125°C, -55°C	86	-	dB
	-CMRR	$\Delta V_{CM} = -5V$ , $V+ = +20V$ , $V- = -10V$ , $V_{OUT} = +5V$	1	+25°C	86	-	dB
			2, 3	+125°C, -55°C	86	-	dB

## Specifications HA-5114/883

**TABLE 1. DC ELECTRICAL PERFORMANCE CHARACTERISTICS (Continued)**

Device Tested at:  $V_{SUPPLY} = \pm 15V$ ,  $R_{SOURCE} = 100\Omega$ ,  $R_{LOAD} = 500k\Omega$ ,  $V_{OUT} = 0V$ , Unless Otherwise Specified.

PARAMETERS	SYMBOL	CONDITIONS	GROUP A SUBGROUPS	TEMPERATURE	LIMITS		UNITS
					MIN	MAX	
Output Voltage Swing	+V <sub>OUT1</sub>	R <sub>L</sub> = 2kΩ	1	+25°C	10	-	V
			2, 3	+125°C, -55°C	10	-	V
	-V <sub>OUT1</sub>	R <sub>L</sub> = 2kΩ	1	+25°C	-	-10	V
			2, 3	+125°C, -55°C	-	-10	V
	+V <sub>OUT2</sub>	R <sub>L</sub> = 10kΩ	1	+25°C	12	-	V
			2, 3	+125°C, -55°C	12	-	V
-V <sub>OUT2</sub>	R <sub>L</sub> = 10kΩ	1	+25°C	-	-12	V	
		2, 3	+125°C, -55°C	-	-12	V	
Output Current	+I <sub>OUT</sub>	V <sub>OUT</sub> = -5V	1	+25°C	10	-	mA
			2, 3	+125°C, -55°C	10	-	mA
	-I <sub>OUT</sub>	V <sub>OUT</sub> = +5V	1	+25°C	-	-10	mA
			2, 3	+125°C, -55°C	-	-10	mA
Quiescent Power Supply Current	+I <sub>CC</sub>	V <sub>OUT</sub> = 0V, I <sub>OUT</sub> = 0mA	1	+25°C	-	6.5	mA
			2, 3	+125°C, -55°C	-	7.5	mA
	-I <sub>CC</sub>	V <sub>OUT</sub> = 0V, I <sub>OUT</sub> = 0mA	1	+25°C	-6.5	-	mA
			2, 3	+125°C, -55°C	-7.5	-	mA
Power Supply Rejection Ratio	+PSRR	ΔV <sub>SUP</sub> = 10V, V+ = +10V, V- = -15V V+ = +20V, V- = -15V	1	+25°C	86	-	dB
			2, 3	+125°C, -55°C	86	-	dB
	-PSRR	ΔV <sub>SUP</sub> = 10V, V+ = +15V, V- = -10V V+ = +15V, V- = -20V	1	+25°C	86	-	dB
			2, 3	+125°C, -55°C	86	-	dB

**TABLE 2. AC ELECTRICAL PERFORMANCE CHARACTERISTICS**

Table 2 Intentionally Left Blank. See AC Parameters in Table 3

**TABLE 3. ELECTRICAL PERFORMANCE CHARACTERISTICS**

Device Characterized at:  $V_{SUPPLY} = \pm 15V$ ,  $R_{LOAD} = 2k\Omega$ ,  $C_{LOAD} = 50pF$ ,  $A_{VCL} = 10V/V$ , Unless Otherwise Specified.

PARAMETERS	SYMBOL	CONDITIONS	NOTES	TEMPERATURE	LIMITS		UNITS
					MIN	MAX	
Differential Input Resistance	R <sub>IN</sub>	V <sub>CM</sub> = 0V	1	+25°C	250	-	kΩ
Input Noise Voltage	E <sub>N</sub>	R <sub>S</sub> = 20Ω, f <sub>O</sub> = 1000Hz	1	+25°C	-	6	nV/√Hz
Input Noise Current	I <sub>N</sub>	R <sub>S</sub> = 2MΩ, f <sub>O</sub> = 1000Hz	1	+25°C	-	3	pA/√Hz
Gain Bandwidth Product	GBWP	V <sub>O</sub> = 200mV, f <sub>O</sub> = 30kHz	1	+25°C	34	-	MHz
		V <sub>O</sub> = 200mV, f <sub>O</sub> = 1MHz	1	+25°C	40	-	MHz

## Specifications HA-5114/883

**TABLE 3. ELECTRICAL PERFORMANCE CHARACTERISTICS (Continued)**

Device Characterized at:  $V_{SUPPLY} = \pm 15V$ ,  $R_{LOAD} = 2k\Omega$ ,  $C_{LOAD} = 50pF$ ,  $A_{VCL} = 10V/V$ , Unless Otherwise Specified.

PARAMETERS	SYMBOL	CONDITIONS	NOTES	TEMPERATURE	LIMITS		UNITS
					MIN	MAX	
Slew Rate	+SR	$V_{OUT} = -5V$ to $+5V$	1	+25°C	12	-	V/ $\mu$ s
	-SR	$V_{OUT} = +5V$ to $-5V$	1	+25°C	12	-	V/ $\mu$ s
Full Power Bandwidth	FPBW	$V_{PEAK} = 10V$	1, 2	+25°C	191	-	kHz
Minimum Closed Loop Stable Gain	CLSG	$R_L = 2k\Omega$ , $C_L = 50pF$	1	-55°C to +125°C	10	-	V/V
Rise and Fall Time	$t_R$	$V_{OUT} = 0V$ to $+200mV$	1, 4	+25°C	-	100	ns
	$t_F$	$V_{OUT} = 0V$ to $-200mV$	1, 4	+25°C	-	100	ns
Overshoot	+OS	$V_{OUT} = 0V$ to $+200mV$	1	+25°C	-	40	%
	-OS	$V_{OUT} = 0V$ to $-200mV$	1	+25°C	-	40	%
Output Resistance	$R_{OUT}$	Open Loop	1	+25°C	-	270	$\Omega$
Quiescent Power Consumption	PC	$V_{OUT} = 0V$ , $I_{OUT} = 0mA$	1, 3	-55°C to +125°C	-	225	mW
Channel Separation	CS	$R_S = 1k\Omega$ , $A_{VCL} = 100V/V$ , $V_{IN} = 100mV_{PEAK}$ at 10kHz Referred to Input	1	+25°C	55	-	dB

**NOTES:**

1. Parameters listed in Table 3 are controlled via design or process parameters and are not directly tested at final production. These parameters are lab characterized upon initial design release, or upon design changes. These parameters are guaranteed by characterization based upon data from multiple production runs which reflect lot to lot and within lot variation.
2. Full Power Bandwidth guarantee based on Slew Rate measurement using  $FPBW = \text{Slew Rate}/(2\pi V_{PEAK})$ .
3. Quiescent Power Consumption based upon Quiescent Supply Current test maximum. (No load on outputs.).
4. Measured between 10% and 90% points.

**TABLE 4. ELECTRICAL TEST REQUIREMENTS**

MIL-STD-883 TEST REQUIREMENTS	SUBGROUPS (SEE TABLE 1)
Interim Electrical Parameters (Pre Burn-In)	1
Final Electrical Test Parameters	1 (Note 1), 2, 3, 4, 5, 6
Group A Test Requirements	1, 2, 3, 4, 5, 6
Groups C and D Endpoints	1

**NOTE:**

1. PDA applies to Subgroup 1 only.

**Die Characteristics**

**DIE DIMENSIONS:**

99.6 x 95.3 x 19 mils ± 1 mils  
 2530 x 2420 x 483µm ± 25.4µm

**METALLIZATION:**

Type: Al, 1% Cu  
 Thickness: 16kÅ ± 2kÅ

**GLASSIVATION:**

Type: Nitride (Si3N4) over Silox (SiO2, 5% Phos.)  
 Silox Thickness: 12kÅ ± 2kÅ  
 Nitride Thickness: 3.5kÅ ± 1.5kÅ

**WORST CASE CURRENT DENSITY:**

1.43 x 10<sup>5</sup> A/cm<sup>2</sup> at 10mA


**SUBSTRATE POTENTIAL (Powered Up):**

Unbiased

**TRANSISTOR COUNT: 175**

**PROCESS: Bipolar Dielectric Isolation**

**Metallization Mask Layout**

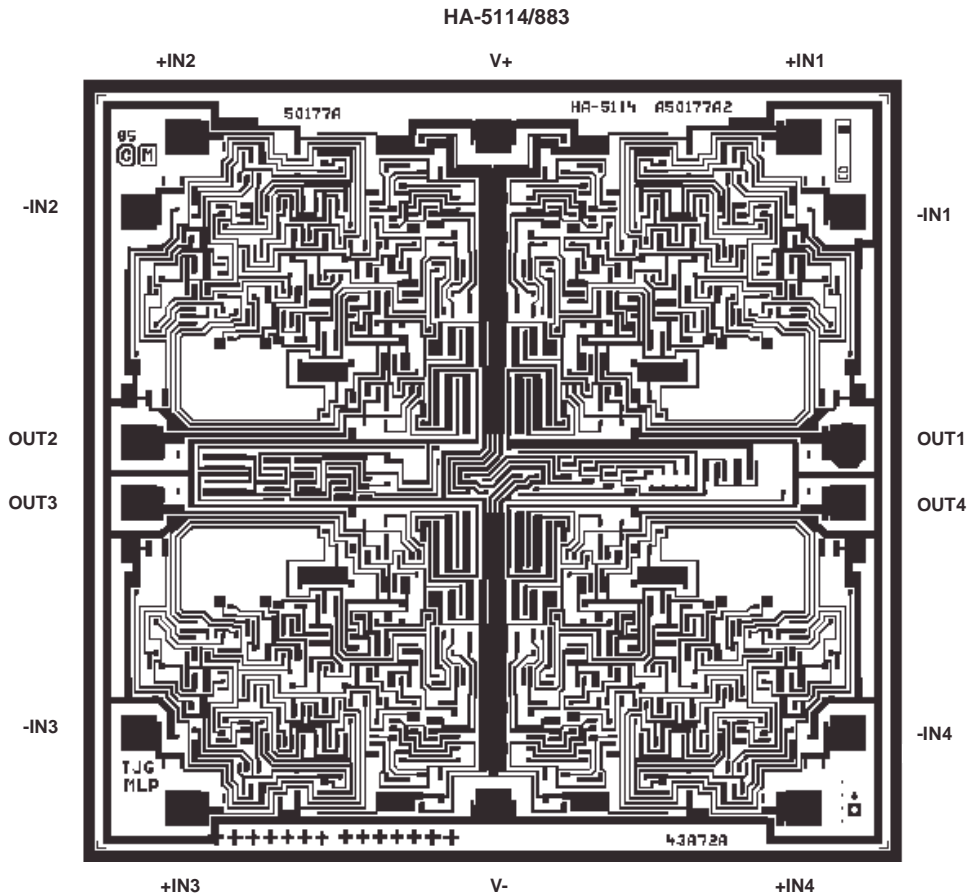



All Intersil semiconductor products are manufactured, assembled and tested under **ISO9000** quality systems certification.

*Intersil products are sold by description only. Intersil Corporation reserves the right to make changes in circuit design and/or specifications at any time without notice. Accordingly, the reader is cautioned to verify that data sheets are current before placing orders. Information furnished by Intersil is believed to be accurate and reliable. However, no responsibility is assumed by Intersil or its subsidiaries for its use; nor for any infringements of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of Intersil or its subsidiaries.*

For information regarding Intersil Corporation and its products, see web site <http://www.intersil.com>

## Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

-  [View HA1-5114/883 on WIN SOURCE](#)
-  [Rochester Electronics](#) Information

## Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management