



# THE DATASHEET OF

# 26647201RP2



[www.win-source.net](http://www.win-source.net)



0086-755-83957316




**MATERIAL // ELECTRICAL SPECIFICATIONS**

CURRENT RATING: 2A  
 VOLTAGE RATING: 250VAC (r.m.s.)  
 INSULATOR RESISTANCE: 5000 MOhms MIN  
 CONTACT RESISTANCE: 20 mOhms MAX  
 OPERATING TEMPERATURE: -40°C TO 105°C  
 PROCESS TEMP: 260°C MAX  
 CONTACT MATERIAL: COPPER ALLOY  
 INSULATOR MATERIAL: PA6T // UL94V-0 // BLACK

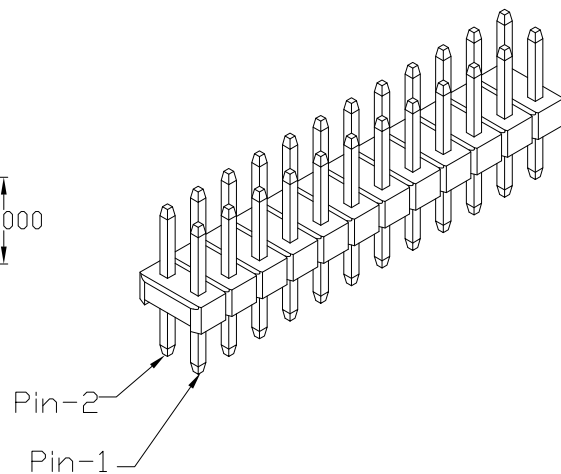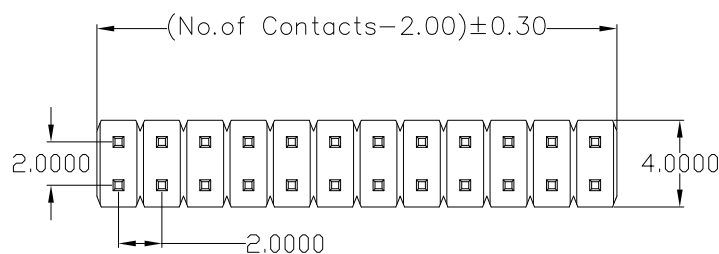

**2664YY01RP2**

SERIES \_\_\_\_\_  
 POSITIONS \_\_\_\_\_  
 02-72 = No. of Contacts (Increments of 2)  
 TYPE \_\_\_\_\_  
 01 = STRAIGHT  
 PLATING \_\_\_\_\_  
 P2= GOLD FLASH ENTIRE CONTACT

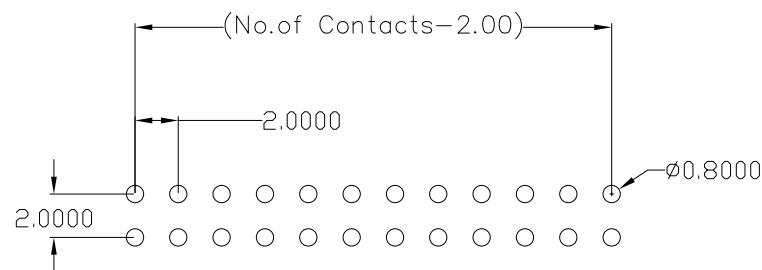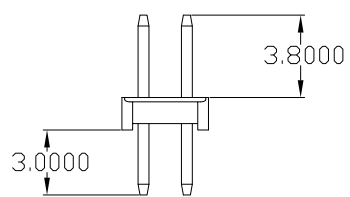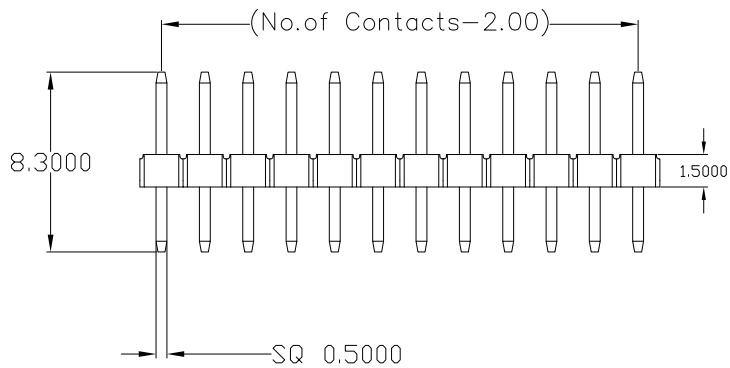

Recommended P.C. Board  
 Hole Layout

RoHS COMPLIANT



THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.

DRAWN: P. JENKINS  
 DATE: 01/27/2006

TOLERANCE  
 .X ±0.3  
 .XX ±0.20  
 .XXX ±0.100

UNITS = mm

DO NOT SCALE FROM DRAWING

**NorComp**

SCALE: NTS	SHEET 1 OF 1	REV 4
DWG NO. 2664YY01RP2		

## Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

 [View 26647201RP2 on WIN SOURCE](#)

 [NorComp Inc. Information](#)

## Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management