




**THE DATASHEET OF**  
**09664546513**



Number of contacts

# 9-50

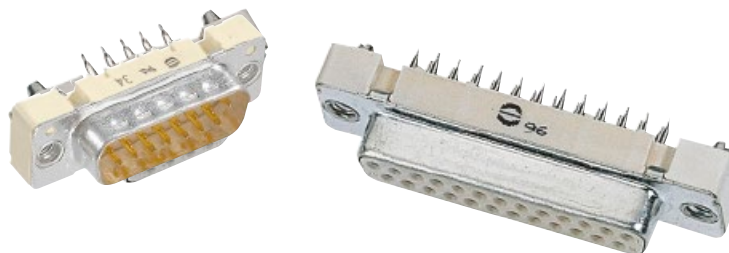

Press-in, straight with grounding press-in board locks

Identification	No. of contacts		Part number	
			Performance level 3	Performance level 2
<b>Performance levels</b> Explanations see page 05.171 Other performance levels on request				
<b>Male connector</b> Flange height x = 5.7 mm				
metal shell with dimples	9		09 66 164 771 .	09 66 164 671 .
	15		09 66 264 771 .	09 66 264 671 .
	25		09 66 364 771 .	09 66 364 671 .
Please insert digit for flange thread or fitted female screw locks				
M3 ▶ 5				
4-40 UNC ▶ 6				
fitted screw locks 4-40 UNC ▶ 7 <sup>1)</sup>				
<b>Female connector</b> Flange height x = 5.7 mm				
metal shell	9		09 66 154 751 .	09 66 154 651 .
	15		09 66 254 751 .	09 66 254 651 .
	25		09 66 354 751 .	09 66 354 651 .
	37		09 66 454 751 .	09 66 454 651 .
Please insert digit for flange thread or fitted female screw locks				
M3 ▶ 5				
4-40 UNC ▶ 6				
fitted screw locks 4-40 UNC ▶ 7 <sup>1)</sup>				
<b>Female connector</b> Flange height x = 6 mm				
metal shell	9		09 66 154 751 .	09 66 154 651 .
	15		09 66 254 751 .	09 66 254 651 .
	25		09 66 354 751 .	09 66 354 651 .
	37		09 66 454 751 .	09 66 454 651 .
	50		09 66 554 751 .	09 66 554 651 .
Please insert digit for flange thread or fitted female screw locks				
M3 ▶ 1				
4-40 UNC ▶ 2				
fitted screw locks 4-40 UNC ▶ 3 <sup>1)</sup>				

<sup>1)</sup> Fitted screw locks 4-40 UNC not normally kept in stock for performance level 3  
 Connector dimensions see page 05.173. Mating conditions see page 05.171.

## Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

 [View 09664546513](#) on WIN SOURCE

 [HARTING](#) Information

## Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management