



THE DATASHEET OF EC5SAW-24D12N





EC5SAW SERIES

10 WATT WIDE INPUT DC-DC CONVERTERS



FEATURE

- * 4:1 Input Range
- * Regulated Outputs
- * 3000VDC/2000VAC Isolation
- * Efficiency Up to 89.5%
- * Compact SIP8 Package
- * Remote On/Off Control
- * 6.6-10W Isolated Output
- * Fixed Switching Frequency
- * No Tantalum Capacitor Inside
- * Input Under-Voltage Protection
- * Low No Load Power Consumption
- * Continuous Short Circuit Protection



MODEL NUMBER	INPUT VOLTAGE(4)	OUTPUT VOLTAGE	OUTPUT CURRENT		INPUT CURRENT		%EFF.		CAPACITOR LOAD MAX.
			MIN.	MAX.	NO LOAD	FULL LOAD	(3)	(2)	
EC5SAW-24S33N	9-36 VDC	3.3 VDC	0 mA	2000 mA	6 mA	336 mA	81	81.5	2000uF
EC5SAW-24S05N	9-36 VDC	5 VDC	0 mA	2000 mA	6 mA	490 mA	83.5	85	2000uF
EC5SAW-24S12N	9-36 VDC	12 VDC	0 mA	833 mA	6 mA	473 mA	87	89	833uF
EC5SAW-24S15N	9-36 VDC	15 VDC	0 mA	666 mA	6 mA	468 mA	88.5	89.5	666uF
EC5SAW-24D05N	9-36 VDC	±5 VDC	0 mA	±1000 mA	6 mA	490 mA	84	85	1000uF
EC5SAW-24D12N	9-36 VDC	±12 VDC	0 mA	±417 mA	7 mA	468 mA	88.5	89	417uF
EC5SAW-24D15N	9-36 VDC	±15 VDC	0 mA	±333 mA	7 mA	468 mA	88.5	89	333uF
EC5SAW-48S33N	18-75 VDC	3.3 VDC	0 mA	2000 mA	6 mA	168 mA	81	81	2000uF
EC5SAW-48S05N	18-75 VDC	5 VDC	0 mA	2000 mA	6 mA	245 mA	84	85	2000uF
EC5SAW-48S12N	18-75 VDC	12 VDC	0 mA	833 mA	6 mA	237 mA	87.5	88	833uF
EC5SAW-48S15N	18-75 VDC	15 VDC	0 mA	666 mA	6 mA	234 mA	87.5	88	666uF
EC5SAW-48D05N	18-75 VDC	±5 VDC	0 mA	±1000 mA	6 mA	245 mA	84	85	1000uF
EC5SAW-48D12N	18-75 VDC	±12 VDC	0 mA	±417 mA	6 mA	234 mA	88	88	417uF
EC5SAW-48D15N	18-75 VDC	±15 VDC	0 mA	±333 mA	6 mA	234 mA	87.5	88	333uF

NOTE:

1. Nominal Input Voltage 24 or 48 VDC
2. Measured at Nominal Input Voltage
3. Measured at 12VDC for 24Vin, 24VDC for 48Vin
4. For 3.3Vo, 5Vo & ±5Vo has Derating by Input is Required Show Fig.1

SPECIFICATIONS

All Specifications Typical At Nominal Line, Full Load, and 25°C Unless Otherwise Noted

INPUT SPECIFICATIONS:

Input Voltage Range 24V 9-36V
 48V 18-75V
 Input Surge Voltage (100 ms max.) 24V 50VDC max.
 48V 100VDC max.
 Input Filter Capacitive
 Remote On/Off Control:
 Module On Open or High Impedance
 Module Off 2mA to 4mA
 Module Off (Input Idle Current) 2.5mA max.

OUTPUT SPECIFICATIONS:


Voltage Accuracy ±1.0% max.
 Voltage Balance (Dual) ±1.0% max
 Transient Response: 75%~100% Step Load Change
 Error Band ±5% Vout Nominal, Recovery Time < 250µs
 Ripple & Noise, 20MHz BW (Note 5) ... 3.3V & 5V & ±5V ... 100mV pk-pk max.
 12V/15V/±12V/±15V 1%Vo max.
 Temperature Coefficient ±0.02%/°C max.
 Short Circuit Protection Continuous
 Line Regulation (note1) ±0.2% max.
 Load Regulation (note2) ±1.0% max.
 Cross Regulation (Dual note3) ... Asymmetrical Load 25%/100% .. ±5.0% max.
 Current Limit 180% typ.
 Start up time 5ms typ.

GENERAL SPECIFICATIONS:

Efficiency See Table
 Isolation Voltage Input/Output 3000VDC min.
 Input/Output 2000VAC min.
 Isolation Resistance 10⁹ ohm min.
 Isolation Capacitance 50pF max.
 Switching Frequency 530KHz typ.
 Operating Ambient Temperature -40°C to +85°C
 De-rating, Above 50°C Linearly to Zero power at 105°C
 Case Temperature (note4) 105°C max.
 Cooling Natural Convection
 Storage Temperature -55°C to +125°C
 Humidity 95% RH max. Non condensing
 MTBF MIL-HDBK-217F, GB, 25°C, Full Load 1930Khrs typ.
 Dimensions 0.87x0.37x0.47 inches (22.0x9.5x12.0mm)
 Case Material Non-Conductive Black Plastic
 Weight 4.9g

CASE SA DIMENSIONS:

All Dimensions In Inches (mm)
 Tolerances : Inches Millimeters
 X.XX=±0.02 X.X=±0.5
 Pin ±0.002 ±0.05

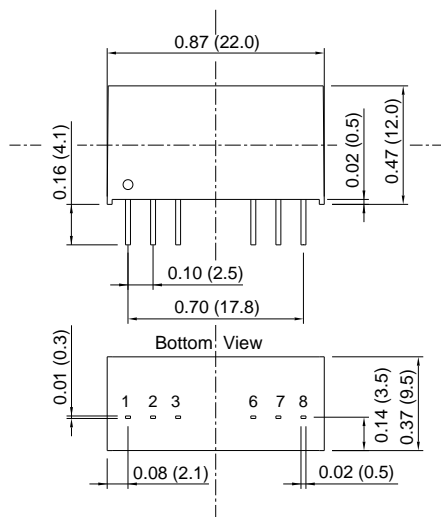

PIN CONNECTION		
Pin	Single	Dual
1	-V Input	-V Input
2	+V Input	+V Input
3	On/Off	On/Off
6	+V Output	+V Output
7	-V Output	Common
8	NC	-V Output

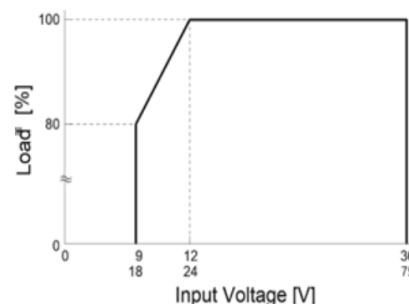


Fig1. Input Voltage Derating Curve
 Typical Derating curve for Natural Convection

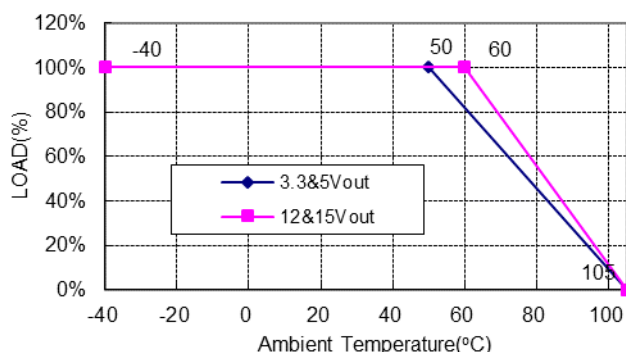


Fig2. Typical Derating Curve for Naturel Convection

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

- ⊖ [View EC5SAW-24D12N on WIN SOURCE](#)
- ⊖ [Cincon Electronics Co. LTD Information](#)

Optimize Your Supply Chain with WIN SOURCE Solutions

- ✓ Global Sourcing Solution
- ✓ Obsolete Management
- ✓ Cost Control Management
- ✓ Shortage Management
- ✓ Alternative Solution
- ✓ Excess Inventory Management