




THE DATASHEET OF
179-025-313R571



D-SUB - FEMALE OVER MALE

25 PIN
SHOWN

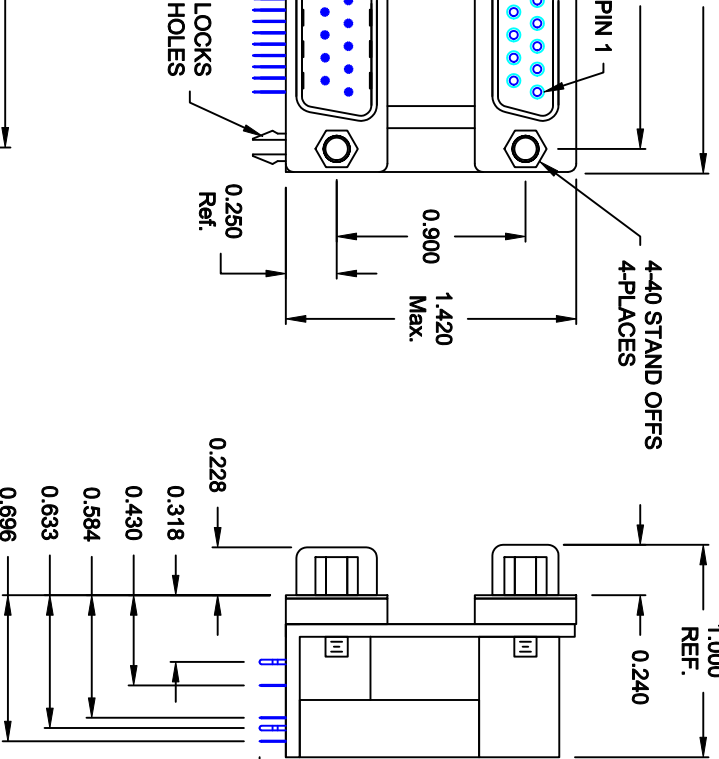

DIMENSIONS (IN.)				
	9	15	25	37
A	1.204	1.535	2.078	2.724
B	0.984	1.312	1.850	2.500
C	0.494	0.494	0.494	0.494

SPECIFICATION:

MATERIAL: STEEL, NICKEL PLATED
SHELL: UL 94V-0 RATED, BLACK PA9T, 260° PROCESS TEMP.
INSULATOR: BRASS
CONTACTS: GOLD PLATED ENTIRE CONTACT

ELECTRICAL:
INSULATOR RESISTANCE: 1,000 Ohms Min.
DIELECTRIC STRENGTH: 1,000V/AC RMS
CURRENT RATING: 5 AMPS
OPERATING TEMPERATURE: -55° C TO 105° C

179-YYY-313R571

SERIES POSITIONS
 009
 015
 025
 037

GENDER
 31 = FEMALE OVER MALE
 41 = FEMALE OVER FEMALE
 51 = FEMALE OVER FEMALE
 61 = MALE OVER MALE

SHELL PLATING
 3 = NICKEL


ROHS COMPLIANT (HIGH TEMP. PROCESS)

HARDWARE OPTIONS
 57 = 4-40 STAND OFFS/BOARD LOCKS

PLATING OPTIONS
 1 = GOLD FLASH (ENTIRE CONTACT)
 A = 30u" GOLD MATING AREA/GOLD FLASH TAILS
 9 = 30u" GOLD MATING AREA/TIN TAILS

DO NOT SCALE FROM DRAWING

PCB LAYOUT

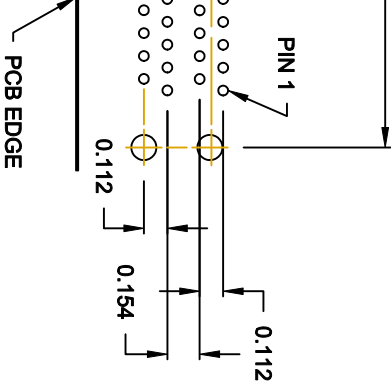

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.

NorComp

DRAWN: C. SMITH	DATE: 03-30-07
CHECKED:	DATE:
SCALE: 1:1	SHEET 1 OF 1
DWG NO. 179-YYY-313R571	REV 5

COMPLIANT

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

 [View 179-025-313R571 on WIN SOURCE](#)

 [NorComp Inc. Information](#)

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management