



**THE DATASHEET OF**  
**189-037-313R571**



T-D-SUB - FEMALE OVER MALE



25 PIN  
SHOWN

DIMENSIONS (IN.)				
	9	15	25	37
A	1.204	1.535	2.078	2.724
B	0.984	1.312	1.850	2.500
C	0.494	0.494	0.494	0.494

**SPECIFICATION:**

**MATERIAL:** STEEL, NICKEL PLATED  
**SHELL:** UL 94V-0 RATED, BLACK PA9T,  
 260° PROCESS TEMP.  
**CONTACTS:** BRASS  
**CONTACT PLATING:** GOLD PLATED ENTIRE CONTACT

**ELECTRICAL:** 1,000 Ohms Min.  
**INSULATOR RESISTANCE:** 1,000V/AC RMS  
**DIELECTRIC STRENGTH:** 5 AMPS  
**CURRENT RATING:** 5 AMPS  
**OPERATING TEMPERATURE:** -55° C TO 105° C

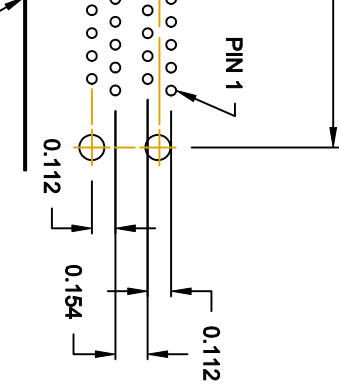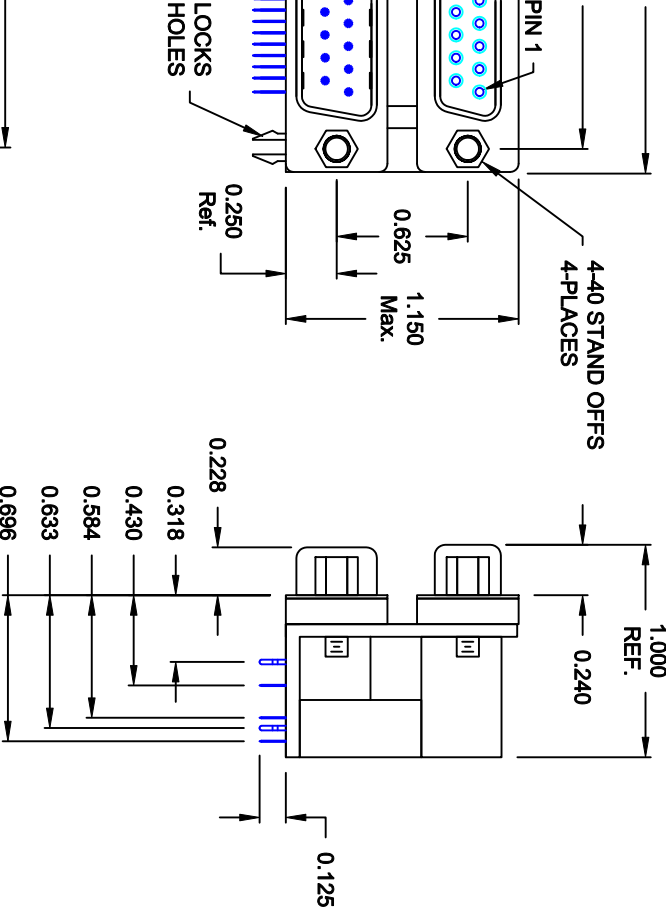

PCB LAYOUT

**DO NOT SCALE FROM DRAWING**

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.



**NorComp**

IMPLIANT

DRAWN:	C. SMITH	DATE:	03-30-07
CHECKED:		DATE:	
SCALE:	1:1	SHEET	1 OF 1
DWG NO.	189-YYY-313R571	REV	5

## Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

 [View 189-037-313R571 on WIN SOURCE](#)

 [NorComp Inc. Information](#)

## Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management