


ALUMINUM ELECTROLYTIC CAPACITORS

UWD

Chip Type, Low Impedance
High Temperature (260°C) Reflow



- Corresponding with 260°C peak reflow soldering
Recommended reflow condition : 260°C peak 5 sec. 230°C over 60 sec. 2 times ($\phi 10 \times 10 : 1$ time)
- Chip type, low impedance temperature range up to +105°C.
- Designed for surface mounting on high density PC board.
- Applicable to automatic mounting machine fed with carrier tape.
- Compliant to the RoHS directive (2011/65/EU,(EU)2015/863).
- AEC-Q200 Qualified. Please contact us for details.


Specifications

Item	Performance Characteristics																																
Category Temperature Range	-55 to +105°C																																
Rated Voltage Range	6.3 to 50V																																
Rated Capacitance Range	1 to 1500 μ F																																
Capacitance Tolerance	$\pm 20\%$ at 120Hz, 20°C																																
Leakage Current ※	After 2 minutes' application of rated voltage at 20°C, leakage current is not more than 0.01 CV or 3 (μ A), whichever is greater.																																
Tangent of loss angle (tan δ)	<table border="1"> <thead> <tr> <th colspan="8">Measurement frequency : 120Hz at 20°C</th> </tr> <tr> <th>Rated voltage (V)</th> <th>6.3</th> <th>10</th> <th>16</th> <th>25</th> <th>35</th> <th>50</th> <th></th> </tr> </thead> <tbody> <tr> <td>tan δ (max.)</td> <td>0.26 (0.28)</td> <td>0.20 (0.24)</td> <td>0.16 (0.20)</td> <td>0.14 (0.16)</td> <td>0.12 (0.14)</td> <td>0.12 (0.14)</td> <td>() is $\phi 8$ over</td> </tr> </tbody> </table>	Measurement frequency : 120Hz at 20°C								Rated voltage (V)	6.3	10	16	25	35	50		tan δ (max.)	0.26 (0.28)	0.20 (0.24)	0.16 (0.20)	0.14 (0.16)	0.12 (0.14)	0.12 (0.14)	() is $\phi 8$ over								
Measurement frequency : 120Hz at 20°C																																	
Rated voltage (V)	6.3	10	16	25	35	50																											
tan δ (max.)	0.26 (0.28)	0.20 (0.24)	0.16 (0.20)	0.14 (0.16)	0.12 (0.14)	0.12 (0.14)	() is $\phi 8$ over																										
Stability at Low Temperature	<table border="1"> <thead> <tr> <th colspan="8">Measurement frequency : 120Hz</th> </tr> <tr> <th colspan="2">Rated voltage (V)</th> <th>6.3</th> <th>10</th> <th>16</th> <th>25</th> <th>35</th> <th>50</th> </tr> </thead> <tbody> <tr> <td>Impedance ratio</td> <td>Z(-25°C) / Z(+20°C)</td> <td>3</td> <td>2</td> <td>2</td> <td>2</td> <td>2</td> <td>2</td> </tr> <tr> <td>ZT / Z20 (max.)</td> <td>Z(-55°C) / Z(+20°C)</td> <td>5</td> <td>4</td> <td>4</td> <td>3</td> <td>3</td> <td>3</td> </tr> </tbody> </table>	Measurement frequency : 120Hz								Rated voltage (V)		6.3	10	16	25	35	50	Impedance ratio	Z(-25°C) / Z(+20°C)	3	2	2	2	2	2	ZT / Z20 (max.)	Z(-55°C) / Z(+20°C)	5	4	4	3	3	3
Measurement frequency : 120Hz																																	
Rated voltage (V)		6.3	10	16	25	35	50																										
Impedance ratio	Z(-25°C) / Z(+20°C)	3	2	2	2	2	2																										
ZT / Z20 (max.)	Z(-55°C) / Z(+20°C)	5	4	4	3	3	3																										
Endurance	<p>The specifications listed at right shall be met when the capacitors are restored to 20°C after the rated voltage is applied for 5000 hours (2000 hours for $\phi D = 4, 5$ and 6.3) at 105°C.</p> <table border="1"> <tr> <td>Capacitance change</td> <td>Within $\pm 30\%$ of the initial capacitance value</td> </tr> <tr> <td>tan δ</td> <td>200% or less than the initial specified value</td> </tr> <tr> <td>Leakage current</td> <td>Less than or equal to the initial specified value</td> </tr> </table>	Capacitance change	Within $\pm 30\%$ of the initial capacitance value	tan δ	200% or less than the initial specified value	Leakage current	Less than or equal to the initial specified value																										
Capacitance change	Within $\pm 30\%$ of the initial capacitance value																																
tan δ	200% or less than the initial specified value																																
Leakage current	Less than or equal to the initial specified value																																
Shelf Life	After storing the capacitors under no load at 105°C for 1000 hours and then performing voltage treatment based on JIS C 5101-4 clause 4.1 at 20°C, they shall meet the specified values for the endurance characteristics listed above.																																
Resistance to soldering heat	<p>The capacitors are kept on a hot plate for 30 seconds, which is maintained at 250°C. The capacitors shall meet the characteristic requirements listed at right when they are removed from the plate and restored to 20°C.</p> <table border="1"> <tr> <td>Capacitance change</td> <td>Within $\pm 10\%$ of the initial capacitance value</td> </tr> <tr> <td>tan δ</td> <td>Less than or equal to the initial specified value</td> </tr> <tr> <td>Leakage current</td> <td>Less than or equal to the initial specified value</td> </tr> </table>	Capacitance change	Within $\pm 10\%$ of the initial capacitance value	tan δ	Less than or equal to the initial specified value	Leakage current	Less than or equal to the initial specified value																										
Capacitance change	Within $\pm 10\%$ of the initial capacitance value																																
tan δ	Less than or equal to the initial specified value																																
Leakage current	Less than or equal to the initial specified value																																
Marking	Black print on the case top.																																


※ I : Leakage Current (μ A), C : Rated Capacitance (μ F), V : Rated Voltage (V)

Chip Type


($\phi 4$ to $\phi 6.3$)

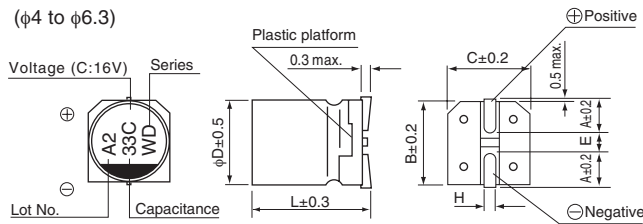

($\phi 8, \phi 10$)

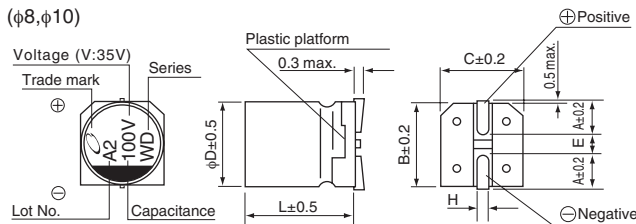

Type numbering system (Example : 16V 22 μ F)

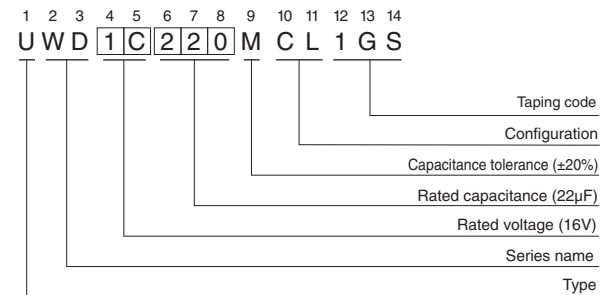

$\phi D \times L$	4 × 5.8	5 × 5.8	6.3 × 5.8	6.3 × 7.7	8 × 10	10 × 10
A	1.8	2.1	2.4	2.4	2.9	3.2
B	4.3	5.3	6.6	6.6	8.3	10.3
C	4.3	5.3	6.6	6.6	8.3	10.3
E	1.0	1.3	2.2	2.2	3.1	4.5
L	5.8	5.8	5.8	7.7	10	10
H	0.5 to 0.8	0.5 to 0.8	0.5 to 0.8	0.5 to 0.8	0.8 to 1.1	0.8 to 1.1

Voltage

V	6.3	10	16	25	35	50
Code	J	A	C	E	V	H

Frequency coefficient of rated ripple current

Frequency	50 Hz	120 Hz	300 Hz	1 kHz	10 kHz or more
Coefficient	0.35	0.50	0.64	0.83	1.00

● Dimension table in next page.

UWD

■ Dimensions

Rated Voltage (V) (code)	Rated Capacitance (μF)	Case Size φD×L (mm)	tan δ	Leakage Current (μA) (at 20°C after 2 minutes)	Impedance (Ω) max. (20°C/100kHz)	Rated Ripple (mArms) (105°C/100kHz)	Part Number
6.3 (0J)	27	4×5.8	0.26	3	1.80	80	UWD0J270MCL1GS
	33	5×5.8	0.26	3	0.76	150	UWD0J330MCL1GS
	47	5×5.8	0.26	3	0.76	150	UWD0J470MCL1GS
	56	5×5.8	0.26	3.528	0.76	150	UWD0J560MCL1GS
	68	6.3×5.8	0.26	4.284	0.44	230	UWD0J680MCL1GS
	100	6.3×5.8	0.26	6.3	0.44	230	UWD0J101MCL1GS
	150	6.3×5.8	0.26	9.45	0.44	230	UWD0J151MCL1GS
	220	6.3×5.8	0.26	13.86	0.44	230	UWD0J221MCL1GS
	330	6.3×7.7	0.26	20.79	0.34	280	UWD0J331MCL1GS
	470	8×10	0.28	29.61	0.17	450	UWD0J471MCL1GS
	680	8×10	0.28	42.84	0.17	450	UWD0J681MCL1GS
	1000	10×10	0.28	63	0.09	670	UWD0J102MCL1GS
	1500	10×10	0.28	94.5	0.09	670	UWD0J152MCL1GS
10 (1A)	22	4×5.8	0.20	3	1.80	80	UWD1A220MCL1GS
	27	5×5.8	0.20	3	0.76	150	UWD1A270MCL1GS
	33	5×5.8	0.20	3.3	0.76	150	UWD1A330MCL1GS
	47	6.3×5.8	0.20	4.7	0.44	230	UWD1A470MCL1GS
	56	6.3×5.8	0.20	5.6	0.44	230	UWD1A560MCL1GS
	68	6.3×5.8	0.20	6.8	0.44	230	UWD1A680MCL1GS
	100	6.3×5.8	0.20	10	0.44	230	UWD1A101MCL1GS
	150	6.3×5.8	0.20	15	0.44	230	UWD1A151MCL1GS
	220	6.3×7.7	0.20	22	0.34	280	UWD1A221MCL1GS
	330	8×10	0.24	33	0.17	450	UWD1A331MCL1GS
	470	8×10	0.24	47	0.17	450	UWD1A471MCL1GS
	680	10×10	0.24	68	0.09	670	UWD1A681MCL1GS
1000	10×10	0.24	100	0.09	670	UWD1A102MCL1GS	
16 (1C)	15	4×5.8	0.16	3	1.80	80	UWD1C150MCL1GS
	22	5×5.8	0.16	3.52	0.76	150	UWD1C220MCL1GS
	27	5×5.8	0.16	4.32	0.76	150	UWD1C270MCL1GS
	33	6.3×5.8	0.16	5.28	0.44	230	UWD1C330MCL1GS
	47	6.3×5.8	0.16	7.52	0.44	230	UWD1C470MCL1GS
	56	6.3×5.8	0.16	8.96	0.44	230	UWD1C560MCL1GS
	68	6.3×5.8	0.16	10.88	0.44	230	UWD1C680MCL1GS
	100	6.3×5.8	0.16	16	0.44	230	UWD1C101MCL1GS
	150	6.3×7.7	0.16	24	0.34	280	UWD1C151MCL1GS
	220	6.3×7.7	0.16	35.2	0.34	280	UWD1C221MCL1GS
	330	8×10	0.20	52.8	0.17	450	UWD1C331MCL1GS
	470	8×10	0.20	75.2	0.17	450	UWD1C471MCL1GS
	680	10×10	0.20	108.8	0.09	670	UWD1C681MCL1GS

UWD



■ Dimensions

Rated Voltage (V) (code)	Rated Capacitance (μF)	Case Size φD×L (mm)	tan δ	Leakage Current (μA) (at 20°C after 2 minutes)	Impedance (Ω) max. (20°C/100kHz)	Rated Ripple (mA _{rms}) (105°C/100kHz)	Part Number
25 (1E)	10	4×5.8	0.14	3	1.80	80	UWD1E100MCL1GS
	15	5×5.8	0.14	3.75	0.76	150	UWD1E150MCL1GS
	22	5×5.8	0.14	5.5	0.76	150	UWD1E220MCL1GS
	27	6.3×5.8	0.14	6.75	0.44	230	UWD1E270MCL1GS
	33	6.3×5.8	0.14	8.25	0.44	230	UWD1E330MCL1GS
	47	6.3×5.8	0.14	11.75	0.44	230	UWD1E470MCL1GS
	56	6.3×5.8	0.14	14	0.44	230	UWD1E560MCL1GS
	68	6.3×5.8	0.14	17	0.44	230	UWD1E680MCL1GS
	100	6.3×7.7	0.14	25	0.34	280	UWD1E101MCL1GS
	150	8×10	0.16	37.5	0.17	450	UWD1E151MCL1GS
	220	8×10	0.16	55	0.17	450	UWD1E221MCL1GS
	330	10×10	0.16	82.5	0.09	670	UWD1E331MCL1GS
	470	10×10	0.16	117.5	0.09	670	UWD1E471MCL1GS
35 (1V)	4.7	4×5.8	0.12	3	1.80	80	UWD1V47MCL1GS
	10	5×5.8	0.12	3.5	0.76	150	UWD1V100MCL1GS
	15	5×5.8	0.12	5.25	0.76	150	UWD1V150MCL1GS
	22	5×5.8	0.12	7.7	0.76	150	UWD1V220MCL1GS
	27	6.3×5.8	0.12	9.45	0.44	230	UWD1V270MCL1GS
	33	6.3×5.8	0.12	11.55	0.44	230	UWD1V330MCL1GS
	47	6.3×5.8	0.12	16.45	0.44	230	UWD1V470MCL1GS
	56	6.3×7.7	0.12	19.6	0.34	280	UWD1V560MCL1GS
	68	6.3×7.7	0.12	23.8	0.34	280	UWD1V680MCL1GS
	100	8×10	0.14	35	0.17	450	UWD1V101MCL1GS
	150	8×10	0.14	52.5	0.17	450	UWD1V151MCL1GS
	220	10×10	0.14	77	0.09	670	UWD1V221MCL1GS
	330	10×10	0.14	115.5	0.09	670	UWD1V331MCL1GS
50 (1H)	1	4×5.8	0.12	3	5.00	30	UWD1H010MCL1GS
	2.2	4×5.8	0.12	3	5.00	30	UWD1H2R2MCL1GS
	3.3	4×5.8	0.12	3	5.00	30	UWD1H3R3MCL1GS
	4.7	5×5.8	0.12	3	1.52	85	UWD1H4R7MCL1GS
	10	6.3×5.8	0.12	5	0.88	165	UWD1H100MCL1GS
	15	6.3×5.8	0.12	7.5	0.88	165	UWD1H150MCL1GS
	22	6.3×5.8	0.12	11	0.88	165	UWD1H220MCL1GS
	27	6.3×7.7	0.12	13.5	0.68	185	UWD1H270MCL1GS
	33	6.3×7.7	0.12	16.5	0.68	185	UWD1H330MCL1GS
	47	6.3×7.7	0.12	23.5	0.68	185	UWD1H470MCL1GS
	56	8×10	0.14	28	0.34	300	UWD1H560MCL1GS
	68	8×10	0.14	34	0.34	300	UWD1H680MCL1GS
	100	8×10	0.14	50	0.34	300	UWD1H101MCL1GS
	150	10×10	0.14	75	0.18	670	UWD1H151MCL1GS
220	10×10	0.14	110	0.18	670	UWD1H221MCL1GS	


• For taping specifications, recommended land size/soldering by reflow and minimum order quantity, please refer to the Guidelines for Aluminum Electrolytic Capacitors.

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

-  View [UWD0J221MCL1GS](#) on WIN SOURCE
-  [Nichicon](#) Information

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management