





**THE DATASHEET OF  
LGJ2G560MELY20**

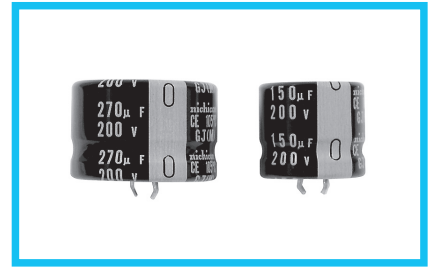

## LGJ Snap-in Terminal Type, 105°C Low-Profile Sized




- Withstanding 3000 hours application of rated ripple current at 105°C.
- Ideally suited for flat design for switching power supply.
- Compliant to the RoHS directive (2011/65/EU, (EU)2015/863).


### Specifications

| Item                          | Performance Characteristics  |  |                    |  |              |   |                     |   |   |                     |    |   |                               |
|-------------------------------|--|--|--------------------|--|--------------|---|---------------------|---|---|---------------------|----|---|-------------------------------|
| Category Temperature Range    | - 40 to +105°C (200 • 250V) , - 25 to +105°C (400 • 450V)  |  |                    |  |              |   |                     |   |   |                     |    |   |                               |
| Rated Voltage Range           | 200 to 450V  |  |                    |  |              |   |                     |   |   |                     |    |   |                               |
| Rated Capacitance Range       | 47 to 680µF  |  |                    |  |              |   |                     |   |   |                     |    |   |                               |
| Capacitance Tolerance         | ±20% at 120Hz, 20°C  |  |                    |  |              |   |                     |   |   |                     |    |   |                               |
| Leakage Current               | $I \leq 3\sqrt{CV}$ (µA) (After 5 minutes' application of rated voltage at 20°C) [C : Rated Capacitance (µF) V : Voltage (V)]  |  |                    |  |              |   |                     |   |   |                     |    |   |                               |
| Tangent of loss angle (tan δ) | <table border="1"> <tr> <th>Rated voltage (V)</th> <th>200 to 400</th> <th>450</th> </tr> <tr> <td>tan δ (max.)</td> <td>0.15</td> <td>0.20</td> </tr> </table>  | Rated voltage (V)  | 200 to 400         | 450  | tan δ (max.) | 0.15  | 0.20                | Measurement frequency : 120Hz at 20°C             |   |                     |    |   |                               |
| Rated voltage (V)             | 200 to 400   | 450  |                    |  |              |   |                     |   |   |                     |    |   |                               |
| tan δ (max.)                  | 0.15   | 0.20   |                    |  |              |   |                     |   |   |                     |    |   |                               |
| Stability at Low Temperature  | <table border="1"> <tr> <th colspan="2">Rated voltage (V)</th> <th>200 • 250</th> <th>400 • 450</th> </tr> <tr> <td rowspan="2">Impedance ratio (max.)</td> <td>Z(-25°C) / Z(+20°C)</td> <td>3</td> <td>8</td> </tr> <tr> <td>Z(-40°C) / Z(+20°C)</td> <td>12</td> <td>—</td> </tr> </table> | Rated voltage (V)  |                    | 200 • 250                                    | 400 • 450    | Impedance ratio (max.)                        | Z(-25°C) / Z(+20°C) | 3   | 8 | Z(-40°C) / Z(+20°C) | 12 | — | Measurement frequency : 120Hz |
| Rated voltage (V)             |  | 200 • 250  | 400 • 450          |  |              |   |                     |   |   |                     |    |   |                               |
| Impedance ratio (max.)        | Z(-25°C) / Z(+20°C)  | 3  | 8                  |  |              |   |                     |   |   |                     |    |   |                               |
|                               | Z(-40°C) / Z(+20°C)  | 12   | —                  |  |              |   |                     |   |   |                     |    |   |                               |
| Endurance                     | The specifications listed at right shall be met when the capacitors are restored to 20°C after D.C. bias plus rated ripple current is applied for 3000 hours at 105°C, the peak voltage shall not exceed the rated voltage.  | <table border="1"> <tr> <td>Capacitance change</td> <td>Within ±20% of the initial capacitance value</td> </tr> <tr> <td>tan δ</td> <td>200% or less than the initial specified value</td> </tr> <tr> <td>Leakage current</td> <td>Less than or equal to the initial specified value</td> </tr> </table> | Capacitance change | Within ±20% of the initial capacitance value | tan δ        | 200% or less than the initial specified value | Leakage current     | Less than or equal to the initial specified value |   |                     |    |   |                               |
| Capacitance change            | Within ±20% of the initial capacitance value   |  |                    |  |              |   |                     |   |   |                     |    |   |                               |
| tan δ                         | 200% or less than the initial specified value  |  |                    |  |              |   |                     |   |   |                     |    |   |                               |
| Leakage current               | Less than or equal to the initial specified value  |  |                    |  |              |   |                     |   |   |                     |    |   |                               |
| Shelf Life                    | After storing the capacitors under no load at 105°C for 1000 hours and then performing voltage treatment based on JIS C 5101-4 clause 4.1 at 20°C, they shall meet the requirements listed at right.   | <table border="1"> <tr> <td>Capacitance change</td> <td>Within ±15% of the initial capacitance value</td> </tr> <tr> <td>tan δ</td> <td>150% or less than the initial specified value</td> </tr> <tr> <td>Leakage current</td> <td>Less than or equal to the initial specified value</td> </tr> </table> | Capacitance change | Within ±15% of the initial capacitance value | tan δ        | 150% or less than the initial specified value | Leakage current     | Less than or equal to the initial specified value |   |                     |    |   |                               |
| Capacitance change            | Within ±15% of the initial capacitance value   |  |                    |  |              |   |                     |   |   |                     |    |   |                               |
| tan δ                         | 150% or less than the initial specified value  |  |                    |  |              |   |                     |   |   |                     |    |   |                               |
| Leakage current               | Less than or equal to the initial specified value  |  |                    |  |              |   |                     |   |   |                     |    |   |                               |
| Marking                       | Printed with white color letter on black sleeve.   |  |                    |  |              |   |                     |   |   |                     |    |   |                               |

### Drawing

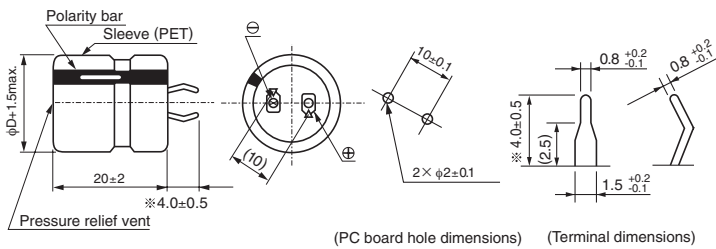

### Type numbering system (Example : 400V 120µF)

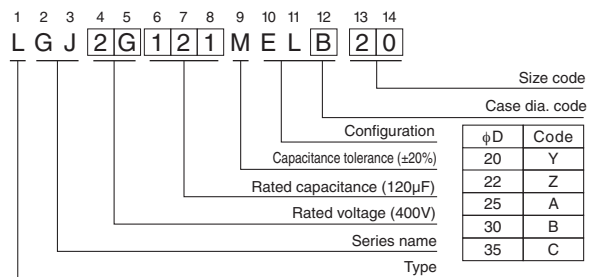

※ Other terminations available upon request.  
 Please refer to the Guidelines for Aluminum Electrolytic Capacitors.

### Frequency coefficient of rated ripple current

| Frequency (Hz) | 50   | 60   | 120  | 300  | 1 k  | 10k  | 50k or more |
|----------------|------|------|------|------|------|------|-------------|
| 200 to 250V    | 0.81 | 0.85 | 1.00 | 1.17 | 1.32 | 1.45 | 1.50        |
| 400 to 450V    | 0.77 | 0.82 | 1.00 | 1.16 | 1.30 | 1.41 | 1.43        |

● Dimension table in next page.



## ■ Dimensions

| 200V(2D)  |                 |                      |                      |                |
|-----------|-----------------|----------------------|----------------------|----------------|
| Cap. (μF) | Size φD × L(mm) | Rated ripple (mArms) | Leakage Current (mA) | Code           |
| 180       | 20 × 20         | 680                  | 0.56                 | LGJ2D181MELY20 |
| 220       | 22 × 20         | 760                  | 0.62                 | LGJ2D221MELZ20 |
| 270       | 22 × 20         | 780                  | 0.69                 | LGJ2D271MELZ20 |
| 330       | 25 × 20         | 960                  | 0.77                 | LGJ2D331MELA20 |
| 390       | 30 × 20         | 1080                 | 0.83                 | LGJ2D391MELB20 |
| 470       | 30 × 20         | 1120                 | 0.91                 | LGJ2D471MELB20 |
| 560       | 35 × 20         | 1440                 | 1.00                 | LGJ2D561MELC20 |
| 680       | 35 × 20         | 1520                 | 1.10                 | LGJ2D681MELC20 |

| 250V(2E)  |                 |                      |                      |                |
|-----------|-----------------|----------------------|----------------------|----------------|
| Cap. (μF) | Size φD × L(mm) | Rated ripple (mArms) | Leakage Current (mA) | Code           |
| 150       | 20 × 20         | 660                  | 0.58                 | LGJ2E151MELY20 |
| 180       | 22 × 20         | 750                  | 0.63                 | LGJ2E181MELZ20 |
| 220       | 25 × 20         | 920                  | 0.70                 | LGJ2E221MELA20 |
| 270       | 30 × 20         | 1040                 | 0.77                 | LGJ2E271MELB20 |
| 330       | 30 × 20         | 1080                 | 0.86                 | LGJ2E331MELB20 |
| 390       | 35 × 20         | 1410                 | 0.93                 | LGJ2E391MELC20 |
| 470       | 35 × 20         | 1470                 | 1.02                 | LGJ2E471MELC20 |



| 400V(2G)  |                 |                      |                      |                |
|-----------|-----------------|----------------------|----------------------|----------------|
| Cap. (μF) | Size φD × L(mm) | Rated ripple (mArms) | Leakage Current (mA) | Code           |
| 56        | 20 × 20         | 550                  | 0.44                 | LGJ2G560MELY20 |
| 68        | 22 × 20         | 620                  | 0.49                 | LGJ2G680MELZ20 |
| 82        | 25 × 20         | 700                  | 0.54                 | LGJ2G820MELA20 |
| 100       | 25 × 20         | 760                  | 0.60                 | LGJ2G101MELA20 |
| 120       | 30 × 20         | 860                  | 0.65                 | LGJ2G121MELB20 |
| 150       | 30 × 20         | 900                  | 0.73                 | LGJ2G151MELB20 |
| 180       | 35 × 20         | 1160                 | 0.80                 | LGJ2G181MELC20 |
| 220       | 35 × 20         | 1210                 | 0.88                 | LGJ2G221MELC20 |

| 450V(2W)  |                 |                      |                      |                |
|-----------|-----------------|----------------------|----------------------|----------------|
| Cap. (μF) | Size φD × L(mm) | Rated ripple (mArms) | Leakage Current (mA) | Code           |
| 47        | 20 × 20         | 520                  | 0.43                 | LGJ2W470MELY20 |
| 56        | 22 × 20         | 600                  | 0.47                 | LGJ2W560MELZ20 |
| 68        | 25 × 20         | 670                  | 0.52                 | LGJ2W680MELA20 |
| 82        | 25 × 20         | 740                  | 0.57                 | LGJ2W820MELA20 |
| 100       | 30 × 20         | 830                  | 0.63                 | LGJ2W101MELB20 |
| 120       | 30 × 20         | 870                  | 0.69                 | LGJ2W121MELB20 |
| 150       | 35 × 20         | 1170                 | 0.77                 | LGJ2W151MELC20 |







Rated ripple current (mArms) at 105°C 120Hz

## Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

-  [View LGJ2G560MELY20 on WIN SOURCE](#)
-  [Nichicon Information](#)

## Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management