




# THE DATASHEET OF H1100FNL



) WITH FLAMMABILITY


) +125°C



ITY AT 245°C REFLOW PROFILE


O MOISTURE SENSITIVE

MAXIMUM THROUGH REFLOW SOLDER



NG ADD A "T" SUFFIX

NL BECOMES H1100FNLT).






FINAL OUTLINE

All rights reserved. Pulse confidential & proprietary. (06/12/14)

|              |               |        |           |                |
|--------------|---------------|--------|-----------|----------------|
| TLA DRAWING  | PS DRAWING    | SHEET  | PART NO.  | DATASHEET REV. |
| H1100FNLT-10 | PS-2005.002-D | 1 OF 3 | H1100FNLT | A              |



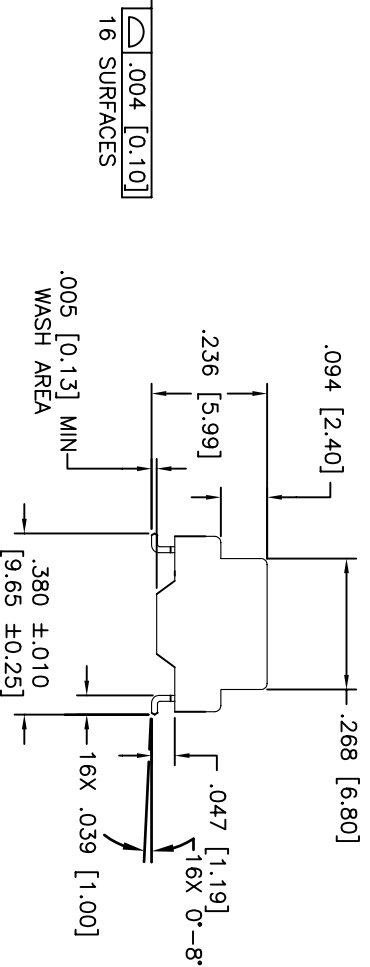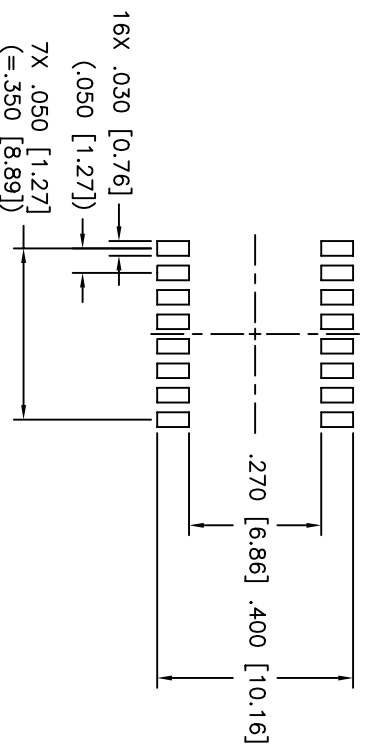

WITH THE FOLLOWING  
REFERENCE ONLY.

All rights reserved. Pulse confidential & proprietary. (06/12/14)

TTLA DRAWING  
H1100FNL-10

PS DRAWING  
PS-2005.002-D



SHEET  
3 OF 3

PART NO.  
H1100FNL

DATASHEET REV.  
A

## Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

-  [View H1100FNL on WIN SOURCE](#)
-  [Pulse Information](#)

## Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management