





**THE DATASHEET OF  
A-2014-2S-4-N-R**

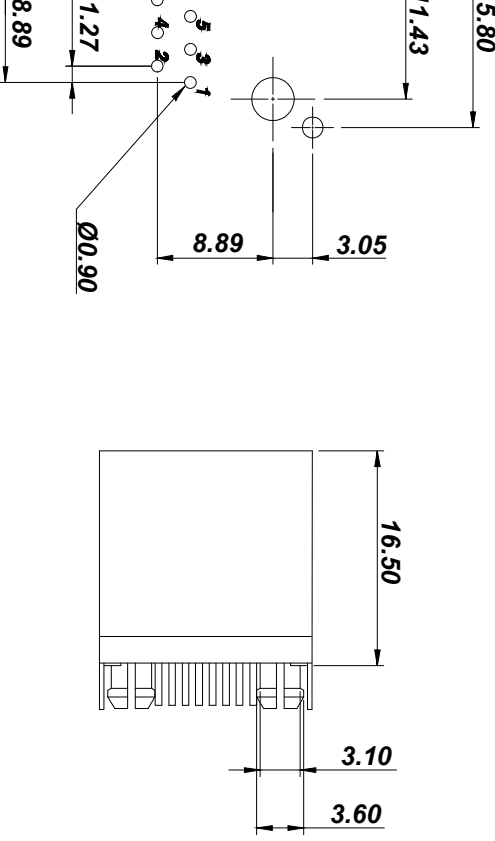

3	4	5	6	7
---	---	---	---	---

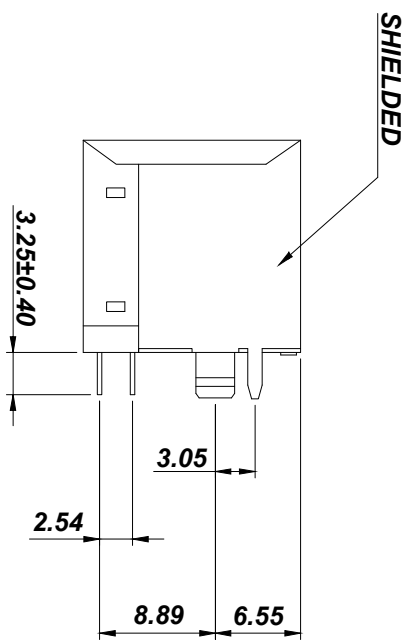

**NOTES:**  
**MATERIAL**  
 1:Housing : PBT Glass Filled,UL94V-0,Black  
 2.Spring Wire: Phosphor Bronze,Ø=0.35mm,  
 ① Selective plating: 6u" Gold on mating contact,  
 Sn on soldering contact  
 3:Shielded: Brass plating Ni

**ELECTRICAL**  
 1:Current Rating : 1.5A Max  
 2:Rating Voltage : 120V AC  
 3:Contact Resistance : 20mΩ max  
 4:Insulation Resistance: 500MΩ min  
 5:Dielectric Voltage : 1000V RMS 60Sec. Min.

**ENVIRONMENTAL**  
 1:Temperature Range: -40°C to +85°C  
 2:Durability: 500 cycles Min  
 3:Soldering Temperature: +235°C  
 Package: Tray

3	4	5	6	7	F
---	---	---	---	---	---

Free RANGE	±0.40	±0.25	±0.15	TOL	±3°	TOL
① Update	26:10:2020					
② Drawn	22:12:2011					



Free RANGE	±0.40	±0.25	±0.15	TOL	±3°	TOL
① Update	26:10:2020					
② Drawn	22:12:2011					
Id.	Modification	Date	Name			
				Drawing-No.	ASS 7330 CO	rev01
				Customer-No.		SHEET 1 / 1

3	4	5	6	7	H
---	---	---	---	---	---

Description:	Modular,R445,1.27mm,8pin THT,180°,Au6u"/Sn1tray
ASSMANN WSW-No.	A-2014-2S-4-N-R

## Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

-  [View A-2014-2S-4-N-R](#) on WIN SOURCE
-  [Assmann WSW Components](#) Information

## Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management