





THE DATASHEET OF
750510705



CUSTOMER TERMINAL	RoHS	LEAD(Pb)-FREE
Sn96%, Ag4%	Yes	Yes




TERM. NO.'s FOR REF. ONLY



DOT LOCATES TERM. #1

CHAMFERS LOCATE TERM.'s #1 & 8


LOT CODE & DATE CODE

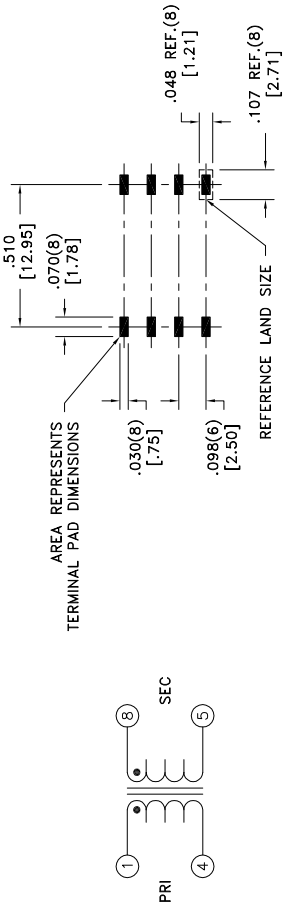

AREA REPRESENTS TERMINAL PAD DIMENSIONS

REFERENCE LAND SIZE

CUSTOMER TO DETERMINE LAND LAYOUT



ELECTRICAL SPECIFICATIONS @ 25°C unless

PARAMETER		TEST CONDITION
D.C. RESISTANCE	1-4	@20°C
D.C. RESISTANCE	8-5	@20°C
INDUCTANCE	1-4	100kHz, 1.0VAC, 1mA
INDUCTANCE	1-4	100kHz, 1.0VAC, 15mA
LEAKAGE INDUCTANCE	1-4	tie(5+8) 75kHz, 50mVAC, 1mA
INTERWINDING CAPACITANCE	1-8	tie(1+4, 5+8) 75kHz, 1.0VAC, 1mA
DIELECTRIC	1-8	2000VAC, 1 second
URNS RATIO		(1-4):(8-5)

GENERAL SPECIFICATIONS:

OPERATING TEMPERATURE RANGE: -20°C to +80°C

Safety standard undefined.

VOLT-TIME PRODUCT: 635Vusec max.,* 1-4. (*-Based on minimum cross sectional area)

Wire insulation & RoHS status not affected by wire color.
Wire insulation color may vary depending on availability.

DETAILS SUBJECT TO CHANGE

REV.	DATE	Packaging Specifications	Tolerances unless otherwise specified: Angles: ±1° Decimals: ±.005 Fractions: ±1/64	DRAWING TITLE	PART
		Method: Tape & Reel PKG-1079 www.we-online.com/midcom	Dimensions in brackets are in millimeters.	TRANSFORMER	75
		CONVENTION PLACEMENT			compliant RoHS
6A	9/16	SEE REVISION SHEET FOR REVISION LEVEL		eISos p/n: 750510705	SPECIFICATIONS

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

 [View 750510705 on WIN SOURCE](#)

 [Wurth Electronics Inc](#) Information

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management