




THE DATASHEET OF
750510476



| | | |
|-------------------|------|---------------|
| CUSTOMER TERMINAL | RoHS | LEAD(Pb)-FREE |
| Sn96%, Ag4% | Yes | Yes |

Ⓜ * DIMENSION MAY BE EXCEEDED WITH SOLDER ONLY

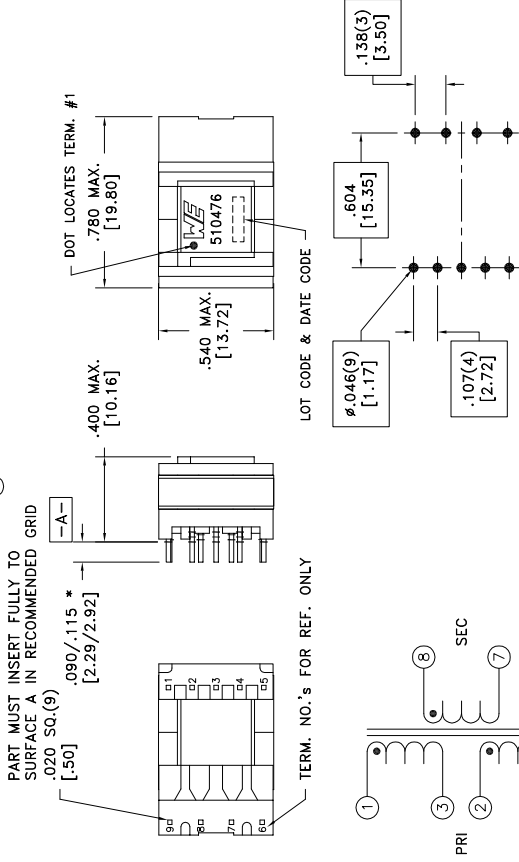

RECOMMENDED
P.C. PATTERN, COMPONENT SIDE

Customer to tie terminals
2+3 on PCB.

ELECTRICAL SPECIFICATIONS @ 25°C unless

| PARAMETER | TEST CONDITION |
|--------------------|---|
| D.C. RESISTANCE | 1-3 @20°C |
| D.C. RESISTANCE | 2-4 @20°C |
| D.C. RESISTANCE | 7-8 @20°C |
| INDUCTANCE | 1-4 tie(2+3), 100kHz, 100μA tie(2+3, 7+8) 100kHz, 10mVAC, 1 |
| LEAKAGE INDUCTANCE | 1-4 tie(2+3), 5000VAC, 1 |
| DIELECTRIC | 1-8 tie(2+3), (1-4):(8-7), tie(2+3) (2-4):(1-3) |
| TURNS RATIO | |
| TURNS RATIO | |

GENERAL SPECIFICATIONS:

Designed to comply with the following requirements:
EN60950-1, UL60950-1/CSA60950-1 and AS/NZS60950-1, UL60950-1/CSA60950-1 and AS/NZS60950-1
- Reinforced insulation for a primary circuit at

Wire insulation & RoHS status not affected by wire color.
Wire insulation color may vary depending on availability.

| | | | | | |
|------|------|--|---|----------------------|---------------|
| REV. | DATE | Packaging Specifications | Tolerances unless otherwise specified: Angles: ±1° Fractions: ±1/64 | DRAWING TITLE | PART |
| | | Method: Tray PKG-0730 www.we-online.com/midcom | Decimals: ±.005 Footprint: ±.001 | TRANSFORMER | 75 |
| 6B | 2/17 | CONVENTION PLACEMENT | This drawing is dual dimensioned. in brackets are in millimeters. | | |
| 6A | 4/12 | SEE REVISION SHEET FOR REVISION LEVEL | | eISos p/n: 750510476 | SPECIFICATION |



Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

 [View 750510476 on WIN SOURCE](#)

 [Wurth Electronics Inc](#) Information

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management