



**THE DATASHEET OF  
UUT0J101MCL1GS**



## UUT 6mmL Chip Type, Wide Temperature Range



- Chip type with load life 2000 hours at +105°C.
- Designed for surface mounting on high density PC board.
- Applicable to automatic mounting machine fed with carrier tape.
- Compliant to the RoHS directive (2011/65/EU, (EU)2015/863).
- AEC-Q200 compliant. Please contact us for details.



Products which are scheduled to be discontinued.  
Not recommended for new designs.




### Specifications


Item	Performance Characteristics							
Category Temperature Range	-55 to +105°C							
Rated Voltage Range	4 to 50V							
Rated Capacitance Range	1 to 100μF							
Capacitance Tolerance	±20% at 120Hz, 20°C							
Leakage Current ※	After 2 minutes' application of rated voltage at 20°C, leakage current is not more than 0.01 CV or 3 (μA), whichever is greater.							
Tangent of loss angle (tan δ)	Measurement frequency :120Hz at 20°C							
	Rated voltage (V)	4	6.3	10	16	25	35	50
Stability at Low Temperature	Measurement frequency :120Hz							
	Rated voltage (V)	4	6.3	10	16	25	35	50
Endurance	Impedance ratio	Z(-25°C) / Z(+20°C)	6	3	3	2	2	2
	ZT / Z20 (max.)	Z(-40°C) / Z(+20°C)	12	8	5	4	3	3
Shelf Life	Capacitance change	Within ±25% of the initial capacitance value (16V or less) Within ±20% of the initial capacitance value (25V or more)						
	tan δ	200% or less than the initial specified value						
Resistance to soldering heat	Leakage current	Less than or equal to the initial specified value						
	Capacitance change	Within ±10% of the initial capacitance value						
Marking	tan δ	Less than or equal to the initial specified value						
	Leakage current	Less than or equal to the initial specified value						

※ I : Leakage Current (μA), C : Rated Capacitance (μF), V : Rated Voltage (V)

### Chip Type

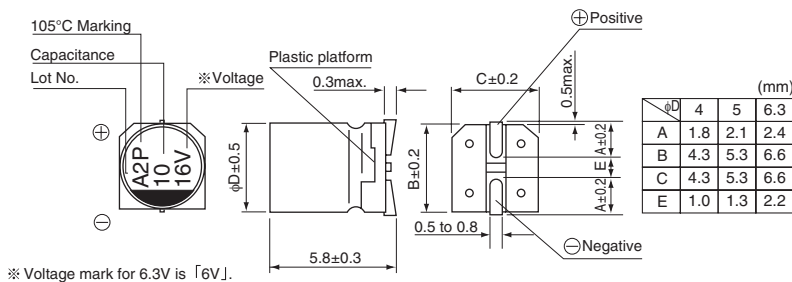

### Type numbering system (Example : 16V 10μF)

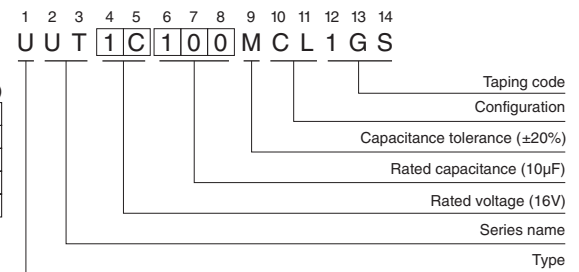

### Frequency coefficient of rated ripple current

Frequency	50 Hz	120 Hz	300 Hz	1 kHz	10 kHz or more
Coefficient	0.70	1.00	1.17	1.36	1.50

● Dimension table in next page.

UUT



## ■ Dimensions

Rated Voltage (V) (code)	Rated Capacitance (μF)	Case Size φD×L (mm)	tan δ	Leakage Current (μA) (at 20°C after 2 minutes)	Rated Ripple (mA <sub>rms</sub> ) (105°C/120Hz)	Part Number
4 (0G)	22	4×5.8	0.37	3	22	UUT0G220MCL1GS
	33	5×5.8	0.37	3	30	UUT0G330MCL1GS
	47	5×5.8	0.37	3	36	UUT0G470MCL1GS
	100	6.3×5.8	0.37	4	60	UUT0G101MCL1GS
6.3 (0J)	22	4×5.8	0.28	3	22	UUT0J220MCL1GS
	33	5×5.8	0.28	3	30	UUT0J330MCL1GS
	47	5×5.8	0.28	3	36	UUT0J470MCL1GS
	100	6.3×5.8	0.28	6.3	60	UUT0J101MCL1GS
10 (1A)	22	5×5.8	0.24	3	27	UUT1A220MCL1GS
	33	5×5.8	0.24	3.3	35	UUT1A330MCL1GS
	47	6.3×5.8	0.24	4.7	46	UUT1A470MCL1GS
	100	6.3×5.8	0.24	10	60	UUT1A101MCL1GS
16 (1C)	10	4×5.8	0.20	3	18	UUT1C100MCL1GS
	22	5×5.8	0.20	3.52	30	UUT1C220MCL1GS
	33	6.3×5.8	0.20	5.28	40	UUT1C330MCL1GS
	47	6.3×5.8	0.20	7.52	50	UUT1C470MCL1GS
25 (1E)	4.7	4×5.8	0.16	3	13	UUT1E470MCL1GS
	10	5×5.8	0.16	3	23	UUT1E100MCL1GS
	22	6.3×5.8	0.16	5.5	38	UUT1E220MCL1GS
	33	6.3×5.8	0.16	8.25	48	UUT1E330MCL1GS
35 (1V)	4.7	4×5.8	0.13	3	15	UUT1V470MCL1GS
	10	5×5.8	0.13	3.5	25	UUT1V100MCL1GS
	22	6.3×5.8	0.13	7.7	42	UUT1V220MCL1GS
50 (1H)	1	4×5.8	0.12	3	6.2	UUT1H010MCL1GS
	2.2	4×5.8	0.12	3	11	UUT1H220MCL1GS
	3.3	4×5.8	0.12	3	14	UUT1H330MCL1GS
	4.7	5×5.8	0.12	3	19	UUT1H470MCL1GS
	10	6.3×5.8	0.12	5	30	UUT1H100MCL1GS




- For taping specifications, recommended land size/soldering by reflow and minimum order quantity, please refer to the Guidelines for Aluminum Electrolytic Capacitors.
- Please select UUX, UUU if high C/V products are required.

## Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

-  [View UUT0J101MCL1GS on WIN SOURCE](#)
-  [Nichicon Information](#)

## Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management