



**THE DATASHEET OF  
7C-48.000MBA-T**



### Features

- ☒ Frequency range : 1MHz to 170MHz
- ☒ SMD seam sealing ceramic package
- ☒ Supply voltage : 1.8V ~ 3.3V
- ☒ CMOS output
- ☒ Tri-state function available
- ☒ External dimensions (mm)  
L : 5.0 x W : 3.2 x H : 1.2
- ☒ RoHS compliant & Pb free

### Applications

- ☒ Networking, Server, Storage
- ☒ Wireless communications
- ☒ Fibre channel, Ethernet, SATA, SAS, PCI-E, USB, WLAN, xDSL, xPON
- ☒ PC mainboard, Notebook, HDD, SSD, Graphics card, Computer peripherals
- ☒ Audio, Video, Gaming, Printer, DSC, IP CAM, Consumer products

### Electrical Characteristics

Item	7C	Conditions
Frequency Range ( $F_0$ )	1MHz ~ 170MHz	
Frequency Stability ( $F_{stab}$ )	$\pm 50$ , $\pm 25$ ppm	-10°C ~ +70°C; Note [1]
	$\pm 50$ , $\pm 30$ , $\pm 25$ , $\pm 15$ ppm	-40°C ~ +85°C; Note [1]
Operating Temperature Range ( $T_{OTR}$ )	-10°C ~ +70°C	
	-40°C ~ +85°C	
Supply Voltage ( $V_{DD}$ )	1.8V, 2.5V, 2.8V, 3.3V	$V_{DD} \pm 10\%$
Current Consumption ( $I_{DD}$ )	10 mA Max.	1MHz ~ 75MHz
	20 mA Max.	75MHz ~ 170MHz
Output Type	CMOS	
Output Load ( $C_L$ )	15 pF	
Output Voltage High ( $V_{OH}$ )	90% $V_{DD}$ Min.	
Output Voltage Low ( $V_{OL}$ )	10% $V_{DD}$ Max.	
Rise & Fall Time ( $T_r / T_f$ )	8 ns Max.	10% ~ 90% of $V_{DD}$
Duty Cycle	40% ~ 60%	
Start-up Time	5 ms Max.	
Enable Voltage High, Logic "1"	70% $V_{DD}$ Min.	Input to Pin1
Enable Voltage Low, Logic "0"	30% $V_{DD}$ Max.	Note [2]
Phase Jitter, RMS	1 ps Max.	Note [3]
Aging ( $F_{aging}$ )	$\pm 3$ ppm Max.	at 25°C $\pm 3$ °C, first year
Storage Temperature Range ( $T_{STR}$ )	-55°C ~ +125°C	


#### Notes:

[1] Inclusive of frequency tolerance at 25°C, 1st year aging at 25°C, and variations over operating temperature, supply voltage, and load.

[2] Output will be enabled if Pin1 is Logic "1" or open; Output will be disabled if Pin1 is Logic "0".

[3] Freq. 10MHz~40MHz, integrated 12kHz~5MHz; Freq. >40MHz, integrated 12kHz~20MHz.

### Dimensions

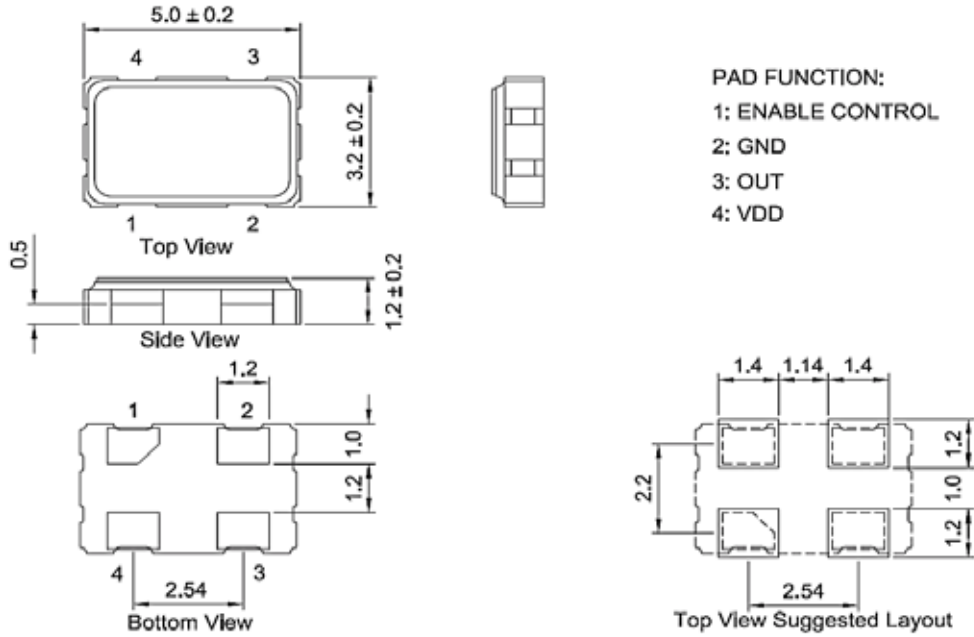

**PAD FUNCTION:**  
 1: ENABLE CONTROL  
 2: GND  
 3: OUT  
 4: VDD

(Unit: mm)

### Ordering Information

B  $\pm 50$  ppm ( $-10^{\circ}\text{C} \sim +85^{\circ}\text{C}$ )  
 C  $\pm 100$  ppm ( $-10^{\circ}\text{C} \sim +70^{\circ}\text{C}$ )  
 F  $\pm 100$  ppm ( $-40^{\circ}\text{C} \sim +85^{\circ}\text{C}$ )

**7C - 30.000M B E - T**

**Frequency in Hz**  
 Please contact us for available frequencies

**Packaging Method**  
 T Tape & Reel


**Supply Voltage**

B	3.3 V
E	2.8 V
C	2.5 V
D	1.8 V

**Frequency Stability**

A	$\pm 25$ ppm ( $-10^{\circ}\text{C} \sim +70^{\circ}\text{C}$ )
D	$\pm 25$ ppm ( $-40^{\circ}\text{C} \sim +85^{\circ}\text{C}$ )
E	$\pm 50$ ppm ( $-40^{\circ}\text{C} \sim +85^{\circ}\text{C}$ )


## Packing

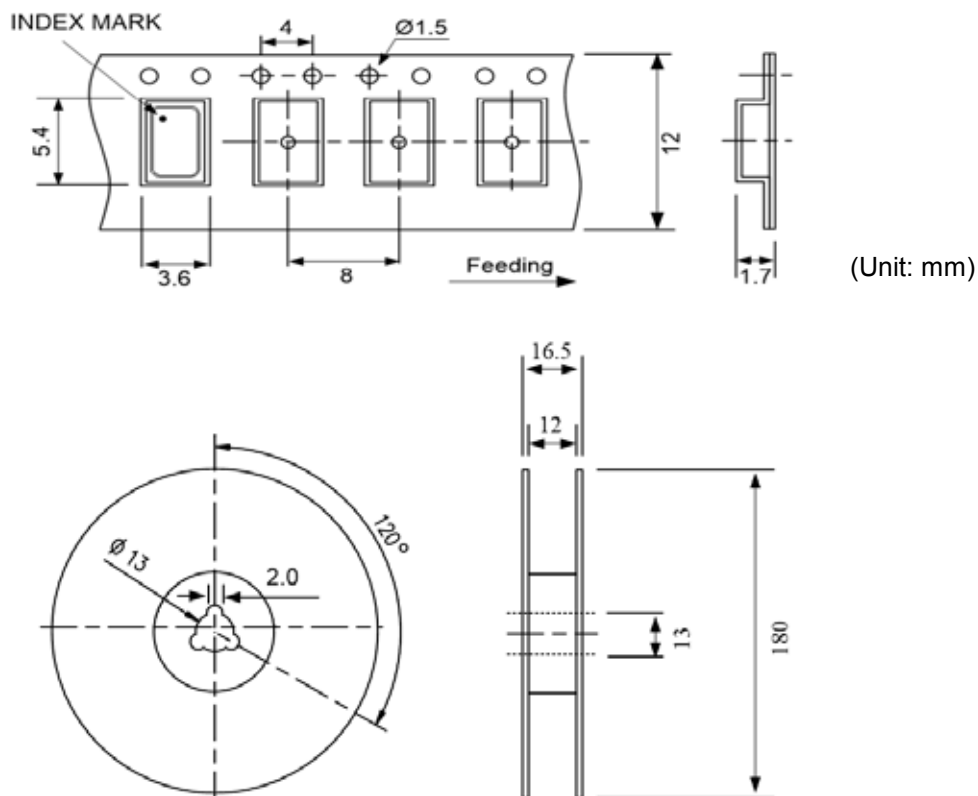

## Reflow Profile


Solder melting point :  $220^{\circ}\text{C} \pm 10^{\circ}\text{C}$ , 60 sec. Min.

Peak temperature :  $260^{\circ}\text{C} \pm 10^{\circ}\text{C}$ , 10 sec. Min.

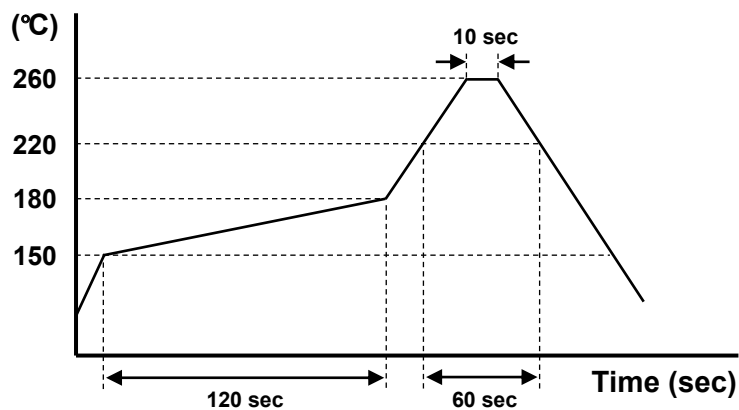

## Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

-  [View 7C-48.000MBA-T on WIN SOURCE](#)
-  [TXC CORPORATION](#) Information

## Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management