



THE DATASHEET OF H2174-05



Customer Information Sheet

DRAWING No.: H2170-XX - H2174-XX


SHEET 2 OF 2

IF IN DOUBT - ASK

(C)

NOT TO SCALE

THIRD ANGLE PLE

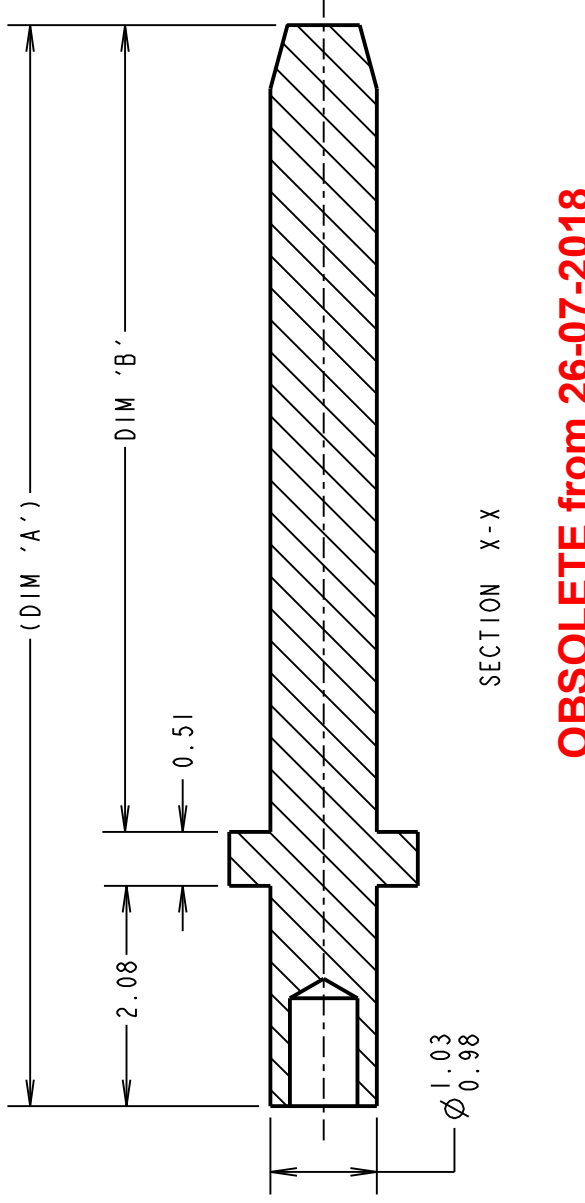

$\phi 1.03$

$\phi 0.98$

(DIM 'A')

DIM 'B'

0.51

SECTION X-X

$\phi 1.78$

OBSELETE from 26-07-2018
H2172-01
H2172-05

NOTES:

1. RECOMMENDED MOUNTING HOLE SIZE = $\phi 1.04 - 1.14$ mm.
2. RECOMMENDED PANEL THICKNESS = 1.6mm.
3. ALL TOLERANCES ARE ± 0.13 UNLESS OTHERWISE STATED.

OBSELETE

PART No.	(DIM 'A')	(DIM 'B')
H2170-XX	(15.29)	12.70
H2171-XX	(21.64)	19.05
H2172-XX	(27.99)	25.40
H2173-XX	(10.21)	7.62
H2174-XX	(6.40)	3.81

HARWIN

www.harwin.com
 technical@harwin.com

THIS DRAWING AND ANY INFORMATION OR DESCRIPTIVE MATTER SET OUT HEREON ARE CONFIDENTIAL AND COPYRIGHT PROPERTY OF THE HARWIN GROUP AND MUST NOT BE DISCLOSED, LOANED, COPIED OR USED FOR MANUFACTURING, TENDERING OR FOR ANY OTHER PURPOSE WITHOUT THEIR WRITTEN PERMISSION.

TOLERANCES
 X = ± 0.10 mm
 X.X = ± 0.05 mm
 X.XX = ± 0.10 mm
 X.XXX = ± 0.01 mm
 ANGLES = $\pm 5^\circ$
 UNLESS STATED

MATERIAL:
 BRASS CW614N TO
 BS EN 12164 (CuZn39Pb3)
 (SEE TABLE)
FINISH: SEE ABOVE
S/AREA: mm²

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

 [View H2174-05 on WIN SOURCE](#)

 [Harwin Inc. Information](#)

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management