



**THE DATASHEET OF  
SL08 5R002**






File: E209153



ISO9001:2008 Certified

**Mechanical Specifications (mm)**

D:	8.0	± .5
T:	4.0	± .5
Lead Diameter	0.5	± Nom
S:	5.1	± Nom
L:	38.0	± Nom
Coating Lead Run Down (straight Leads)	5.0	± 1.0
B:	6.30	± Nom
C:	1.50	± .2

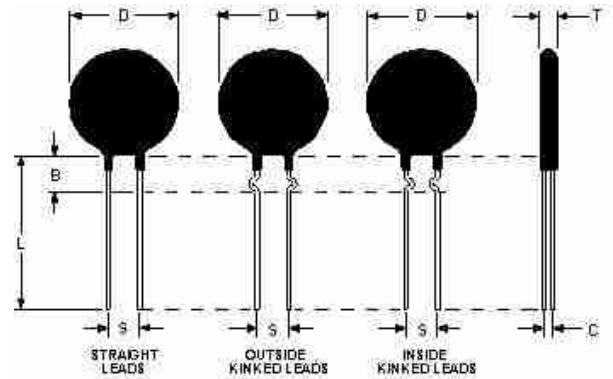

**Electrical Specifications**

Resistance:	5.0	Ω	± 20 %
Max Steady State Current upto 65°C:	2.00	A	
Max Rec. Energy Rating:	10	J	
Actual Failure Instantaneous Energy:	20	J	
Resistance @ 100% Max Current:	0.18	Ω	
Resistance @ 50% Max Current:	0.35	Ω	
Body Temperature at 100% Max Current:	124.00	°c	
Dissipation Constant:	9.0	mw/°c	
Thermal Time Constant:	20	Sec.	
Material Type (for Beta and Curve):	B		

<b>SL08 5R002</b>	
Date: 02/14/2012	Drawn by: Erin Landis
Ametherm, Inc. 3111 N. Deer Run Road Carson City, Nevada USA 89701 www.ametherm.com	Approved By: Mehdi Samii
	Revision: A

## Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

 [View SL08 5R002 on WIN SOURCE](#)

 [Ametherm Information](#)

## Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management