



**THE DATASHEET OF  
BPF1005LM03R2400A**



**Description: 1005 2.4GHz Band Pass Filter**

**PART NUMBER: BPF1005LM03R2400A**

**Features:**

- Compact size : 1.0x0.5x0.35mm
- RoHS compliant

**Applications:**

- WLAN, 802.11b/g/n
- ISM Band

**ELECTRICAL SPECIFICATIONS**

DESCRIPTION	Value
Pass Band	2400 ~ 2500 MHz
Insertion Loss	1.5 dB (Max.) at 20°C
V.S.W.R / Return Loss	2.0 (Max) / 10dB (Min.)
Attenuation	10 dB Min@ 880 ~ 960 MHz 25 dB Min@ 4800 ~ 5000 MHz 25 dB Min@ 7200 ~ 7500 MHz
Operating Temperature	-40 ~ 85°C

In the effort to improve our products, we reserve the right to make changes judged to be necessary.

CONFIDENTIAL AND PROPRIETARY INFORMATION

This document contains confidential and proprietary information of Pulse Electronics, Inc. (Pulse) and is protected by copyright, trade secret and other state and federal laws. Its receipt or possession does not convey any rights to reproduce, disclose its contents, or to manufacture, use or sell anything it may describe. Reproduction, disclosure or use without specific written authorization of Pulse is strictly forbidden.

For more information:



Pulse Worldwide Headquarters  
15255 Innovation Drive #100  
San Diego, CA 92128  
USA  
Tel:1-858-674-8100

Pulse/Larsen Antennas  
18110 SE 34<sup>th</sup> St Bldg 2 Suite 250  
Vancouver, WA 98683  
USA  
Tel: 1-360-944-7551

Europe Headquarters  
Pulse GmbH & Do, KG  
Zeppelinstrasse 15  
Herrenberg, Germany  
Tel: 49 7032 7806 0

Pulse (Suzhou) Wireless Products Co, Inc.  
99 Huo Ju Road(#29 Bldg,4<sup>th</sup> Phase  
Suzhou New District  
Jiangsu Province, Suzhou 215009 PR China  
Tel: 86 512 6807 9998

**Description: 1005 2.4GHz Band Pass Filter**

**PART NUMBER: BPF1005LM03R2400A**

**MECHANICAL DIMENSION**

**Outline**

**Termination**

**Mechanical**

Top View


Side View

Terminal name	Function
P1	Input
P2	GND
P3	Output
P4	GND


Dimension

L (mm)	1.00±0.10
W (mm)	0.50±0.10
T (mm)	0.35±0.10
P1 (mm)	0.30±0.15
P2 (mm)	0.30±0.15
P3 (mm)	0.30±0.15
P4 (mm)	0.30±0.15
D1 (mm)	0.10±0.10
D2 (mm)	0.35±0.15

Side View



**Reference design of EVB**

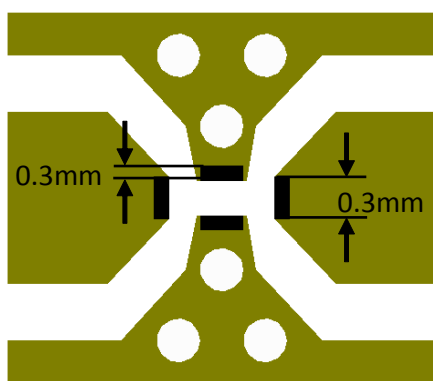

- Solder Resist
- Land
- Via diameter=0.3mm

Line width should be designed to match 50Ω characteristic impedance, depending on PCB material and thickness.

In the effort to improve our products, we reserve the right to make changes judged to be necessary.

CONFIDENTIAL AND PROPRIETARY INFORMATION


This document contains confidential and proprietary information of Pulse Electronics, Inc. (Pulse) and is protected by copyright, trade secret and other state and federal laws. Its receipt or possession does not convey any rights to reproduce, disclose its contents, or to manufacture, use or sell anything it may describe. Reproduction, disclosure or use without specific written authorization of Pulse is strictly forbidden.

**Description:** 1005 2.4GHz Band Pass Filter

**PART NUMBER:** BPF1005LM03R2400A

**ELECTRICAL PERFORMANCES**

Tr1 S31 Log Mag 10.00dB/ Ref 0.000dB [F2]  
 Tr5 S11 Log Mag 10.00dB/ Ref 0.000dB [F2]  
 Tr9 S33 Log Mag 10.00dB/ Ref 0.000dB [F2]

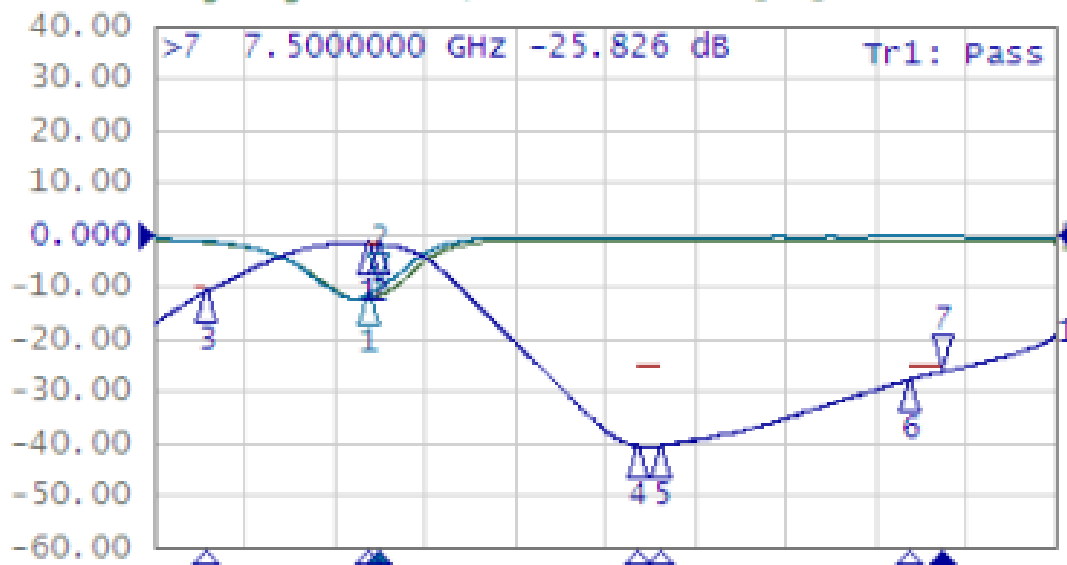

- Measured on Agilent E5071C Network Analyzer
- Input port : Port 1 (Return loss : S11)
- Output port : Port 3 (Return loss : S33)
- Insertion loss : S31

Frequency Characteristics

**Description:** 1005 2.4GHz Band Pass Filter

**PART NUMBER:** BPF1005LM03R2400A

### REVISION HISTORY

Revision	Date	Description
Version 1	Oct. 07, 2020	- New issue

## Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

 [View BPF1005LM03R2400A on WIN SOURCE](#)

 [Pulse Information](#)

## Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management