THE DATASHEET OF

BSCQ000603032N7BHR

SMD Ceramic Multilayer Chip Inductors

BSCQ Series

BSCQ Series supports miniaturized devices. Its low inductance, high precision and high Q enables easy impedance matching at both RF and IF circuits and compact high frequency circuit designing.

Features

- Excellent high frequency application
- High Q factor and SRF value
- Miniaturization
- Tight tolerance
- Wide inductance range

Applications

- RF matching circuit requiring Q value
- Bluetooth, WLAN, UWB, digital TV tuners and high-frequency circuit and module

Product Identification

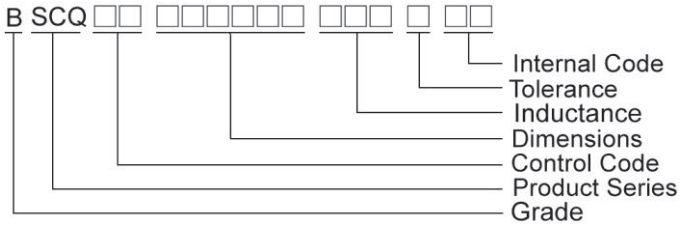

Shape and Dimensions

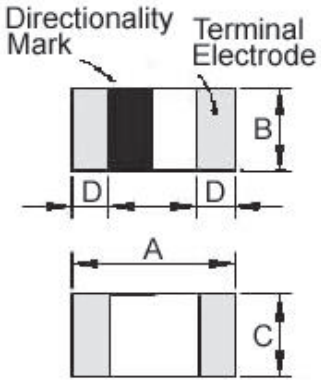

Recommended Pattern

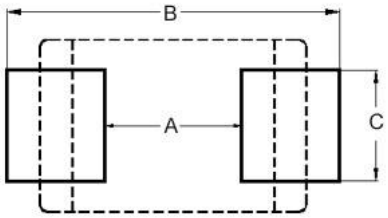

Dimensions in mm

TYPE	A	B	C	D
BSCQ00060303	0.6±0.03	0.3±0.03	0.3±0.03	0.15±0.05

Dimensions in mm

TYPE	A	B	C
BSCQ00060303	0.3	0.75 ~ 1.05	0.3

Electrical Characteristics

Part Number	Inductance (nH)	Tolerance (±%)	Q Min	Test Freq. (MHz)	Q Typical 500 MHz	800 MHz	1.8 GHz	2.0 GHz	2.4 GHz	SRF (MHz) Min	RDC (Ω) Max	IDC (mA) Max
BSCQ000603030N6□00	0.6	±0.1nH/±0.2nH/±0.3nH	14	500	>24	>32	>54	>57	>65	10000	0.06	900
BSCQ000603030N7□00	0.7	±0.1nH/±0.2nH/±0.3nH	14	500	>24	>32	>54	>57	>65	10000	0.06	900
BSCQ000603030N8□00	0.8	±0.1nH/±0.2nH/±0.3nH	14	500	>24	>32	>54	>57	>65	10000	0.06	900
BSCQ000603030N9□00	0.9	±0.1nH/±0.2nH/±0.3nH	14	500	>24	>32	>54	>57	>65	10000	0.06	900
BSCQ000603031N0□00	1.0	±0.1nH/±0.2nH/±0.3nH	14	500	23	32	54	57	65	10000	0.07	850
BSCQ000603031N1□00	1.1	±0.1nH/±0.2nH/±0.3nH	14	500	22	26	45	47	55	10000	0.07	850
BSCQ000603031N2□00	1.2	±0.1nH/±0.2nH/±0.3nH	14	500	22	25	43	44	52	10000	0.08	800
BSCQ000603031N3□00	1.3	±0.1nH/±0.2nH/±0.3nH	14	500	19	25	40	42	47	10000	0.09	760
BSCQ000603031N4□00	1.4	±0.1nH/±0.2nH/±0.3nH	14	500	19	24	339	41	47	10000	0.12	640
BSCQ000603031N5□00	1.5	±0.1nH/±0.2nH/±0.3nH	14	500	19	24	39	41	46	10000	0.15	600
BSCQ000603031N6□00	1.6	±0.1nH/±0.2nH/±0.3nH	14	500	19	24	39	41	46	10000	0.19	510
BSCQ000603031N7□00	1.7	±0.1nH/±0.2nH/±0.3nH	14	500	19	24	39	41	46	10000	0.11	680
BSCQ000603031N8□00	1.8	±0.1nH/±0.2nH/±0.3nH	14	500	19	24	39	41	46	10000	0.12	640
BSCQ000603031N9□00	1.9	±0.1nH/±0.2nH/±0.3nH	14	500	18	24	38	40	45	10000	0.13	620
BSCQ000603032N0□00	2.0	±0.1nH/±0.2nH/±0.3nH	14	500	17	24	38	39	44	10000	0.15	600
BSCQ000603032N1□00	2.1	±0.1nH/±0.2nH/±0.3nH	14	500	17	24	37	39	44	10000	0.16	550
BSCQ000603032N2□00	2.2	±0.1nH/±0.2nH/±0.3nH	14	500	17	24	38	40	43	10000	0.20	500
BSCQ000603032N3□00	2.3	±0.1nH/±0.2nH/±0.3nH	14	500	17	24	37	39	43	10000	0.24	460
BSCQ000603032N4□00	2.4	±0.1nH/±0.2nH/±0.3nH	14	500	17	23	36	38	42	10000	0.26	430
BSCQ000603032N5□00	2.5	±0.1nH/±0.2nH/±0.3nH	14	500	17	23	35	36	40	10000	0.28	415
BSCQ000603032N6□00	2.6	±0.1nH/±0.2nH/±0.3nH	14	500	17	22	34	35	39	10000	0.30	405
BSCQ000603032N7□00	2.7	±0.1nH/±0.2nH/±0.3nH	14	500	17	22	34	35	39	10000	0.32	400
BSCQ000603032N8□00	2.8	±0.1nH/±0.2nH/±0.3nH	14	500	17	22	34	35	39	9500	0.20	500
BSCQ000603032N9□00	2.9	±0.1nH/±0.2nH/±0.3nH	14	500	17	22	34	35	39	9300	0.22	480
BSCQ000603033N0□00	3.0	±0.1nH/±0.2nH/±0.3nH	14	500	17	22	34	35	39	9100	0.24	460
BSCQ000603033N1□00	3.1	±0.1nH/±0.2nH/±0.3nH	14	500	17	22	34	35	39	8900	0.25	450
BSCQ000603033N2□00	3.2	±0.1nH/±0.2nH/±0.3nH	14	500	17	22	33	35	39	8700	0.28	415
BSCQ000603033N3□00	3.3	±0.1nH/±0.2nH/±0.3nH	14	500	18	23	34	36	40	8600	0.28	415
BSCQ000603033N4□00	3.4	±0.1nH/±0.2nH/±0.3nH	14	500	17	23	33	35	39	8400	0.29	410
BSCQ000603033N5□00	3.5	±0.1nH/±0.2nH/±0.3nH	14	500	17	23	33	35	39	8200	0.30	405
BSCQ000603033N6□00	3.6	±0.1nH/±0.2nH/±0.3nH	14	500	16	23	33	35	39	8100	0.32	400
BSCQ000603033N7□00	3.7	±0.1nH/±0.2nH/±0.3nH	14	500	16	23	33	35	38	8000	0.36	370

BSCQ000603033N8□00	3.8	±0.1nH/±0.2nH/±0.3nH	14	500	16	22	33	35	38	7800	0.40	355
BSCQ000603033N9□00	3.9	±0.1nH/±0.2nH/±0.3nH	14	500	16	22	33	35	38	7700	0.41	350

Note: When ordering, please specify tolerance code. Tolerance : B=±0.1nH , C=±0.2nH , S=±0.3nH , H=±3% , J=±5%

- Operating temperature range - 55℃ ~ 125℃(Including self - temperature rise)
- IDC：Applied the current to coils, the inductance shall be less than 10% initial value
- Residual impedance of short chip : 0.48nH
- Measure Equipment：
  L & Q：Agilent E4991A+Agilent 16197A
  SRF：Agilent E4991A or HP19196C
  RDC：HP4338B or CHEN HWA 502

Electrical Characteristics

Part Number	Inductance (nH)	Tolerance (±%)	Q Min	Test Freq. (MHz)	Q Typical 500 MHz	800 MHz	1.8 GHz	2.0 GHz	2.4 GHz	SRF (MHz) Min	RDC (Ω) Max	IDC (mA) Max
BSCQ000603034N3□00	4.3	±0.2nH/±0.3nH	14	500	16	21	32	34	37	6500	0.48	320
BSCQ000603034N7□00	4.7	±0.2nH/±0.3nH	14	500	16	22	33	35	38	6400	0.42	350
BSCQ000603035N1□00	5.1	±0.2nH/±0.3nH	14	500	17	22	34	36	38	6100	0.45	330
BSCQ000603035N6□00	5.6	±0.2nH/±0.3nH	14	500	16	21	33	34	37	5500	0.47	325
BSCQ000603036N2□00	6.2	±0.2nH/±0.3nH	14	500	18	23	34	35	37	5100	0.52	305
BSCQ000603036N8□00	6.8	3 / 5	14	500	17	22	32	33	35	4800	0.55	305
BSCQ000603037N5□00	7.5	3 / 5	14	500	16	21	31	33	34	4600	0.55	305
BSCQ000603038N2□00	8.2	3 / 5	14	500	16	21	31	32	34	4300	0.57	290
BSCQ000603039N1□00	9.1	3 / 5	14	500	16	20	30	31	32	4000	0.65	270
BSCQ0006030310N□00	10	3 / 5	14	500	16	20	28	29	31	3800	0.85	230
BSCQ0006030312N□00	12	3 / 5	12	500	16	20	27	28	28	3300	0.85	230
BSCQ0006030315N□00	15	3 / 5	12	500	15	19	24	24	23	2600	0.89	220
BSCQ0006030318N□00	18	3 / 5	12	500	15	19	23	24	22	2300	1.05	205
BSCQ0006030322N□00	22	3 / 5	12	500	15	19	22	23	20	1900	1.29	190

Note: When ordering, please specify tolerance code. Tolerance : B=±0.1nH , C=±0.2nH , S=±0.3nH , H=±3% , J=±5%

- Operating temperature range - 55℃ ~ 125℃(Including self - temperature rise)
- IDC：Applied the current to coils, the inductance shall be less than 10% initial value
- Residual impedance of short chip : 0.48nH
- Measure Equipment：
  L & Q：Agilent E4991A+Agilent 16197A
  SRF：Agilent E4991A or HP19196C
  RDC：HP4338B or CHEN HWA 502

Test Instruments：Agilent E4991A Material/Impedance Analyzer

BSCQ000603030N6B00

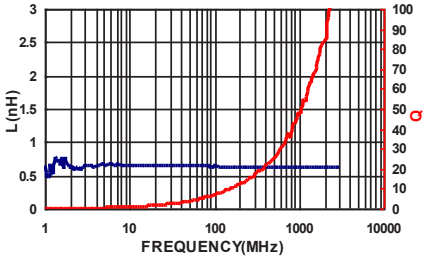

RDC<0.06Ω SRF:10000MHz IDC:900 mA

BSCQ000603030N7B00

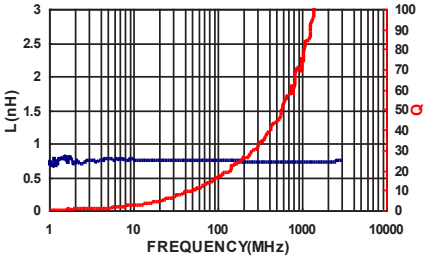

RDC<0.06Ω SRF:10000MHz IDC:900 mA

BSCQ000603030N8B00

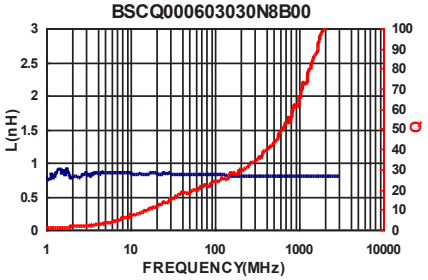

RDC<0.06Ω SRF:10000MHz IDC:900 mA

BSCQ000603030N9B00

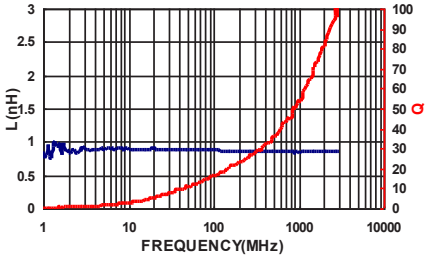

RDC<0.06Ω SRF:10000MHz IDC:900 mA

BSCQ000603031N0B00

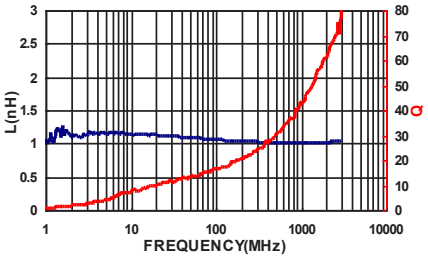

RDC<0.07Ω SRF:10000MHz IDC:850 mA

BSCQ000603031N1B00

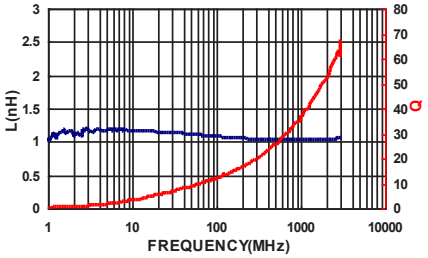

RDC<0.07Ω SRF:10000MHz IDC:850 mA

BSCQ000603031N2B00

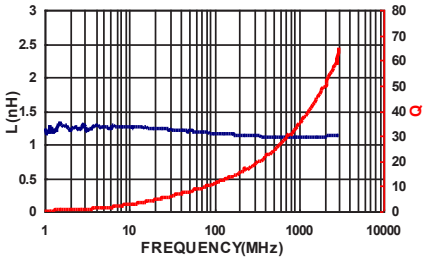

RDC<0.08Ω SRF:10000MHz IDC:800 mA

BSCQ000603031N3B00

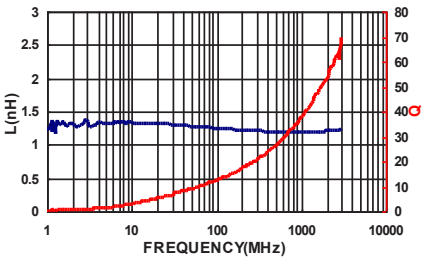

RDC<0.09Ω SRF:10000MHz IDC:760 mA

BSCQ000603031N4B00

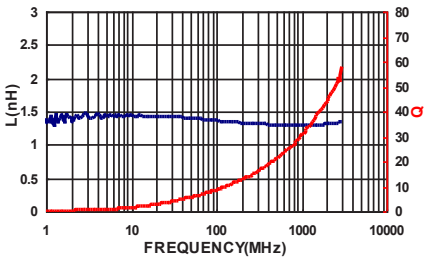

RDC<0.12Ω SRF:10000MHz IDC:640 mA

BSCQ000603031N5B00

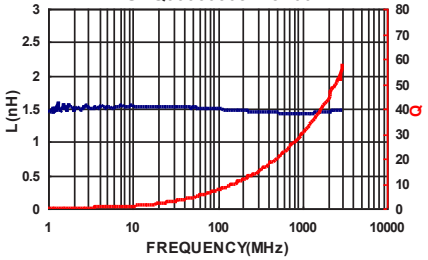

RDC<0.15Ω SRF:10000MHz IDC:600 mA

BSCQ000603031N6B00

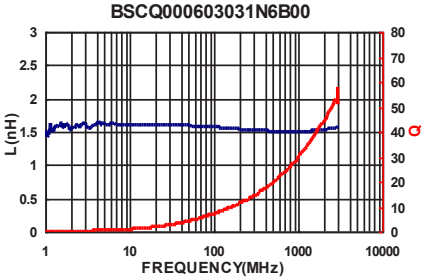

RDC<0.19Ω SRF:10000MHz IDC:510 mA

BSCQ000603031N7B00

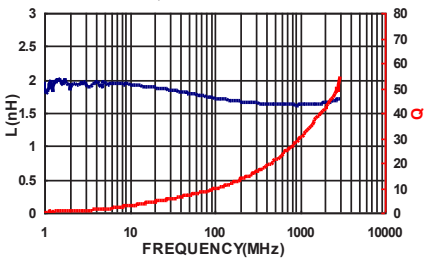

RDC<0.11Ω SRF:10000MHz IDC:680 mA

BSCQ000603031N8B00

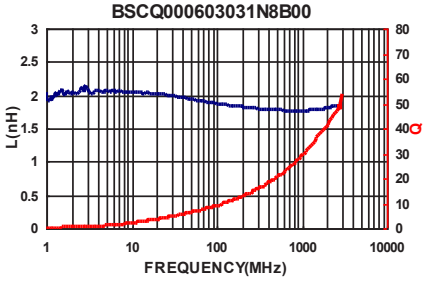

RDC<0.12Ω SRF:10000MHz IDC:640 mA

BSCQ000603031N9B00

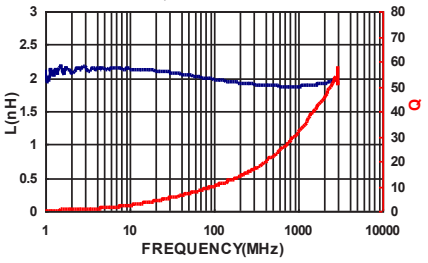

RDC<0.13Ω SRF:10000MHz IDC:620 mA

BSCQ000603032N0B00

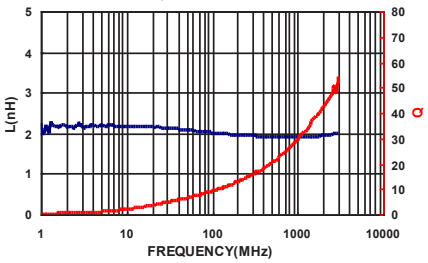

RDC<0.15Ω SRF:10000MHz IDC:600 mA

BSCQ000603032N1B00

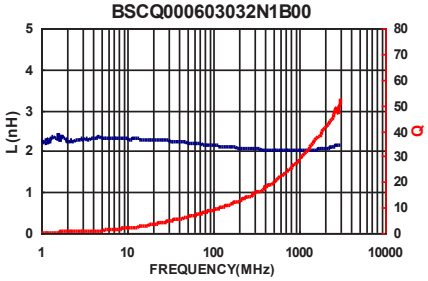

RDC<0.16Ω SRF:10000MHz IDC:550 mA

BSCQ000603032N2B00

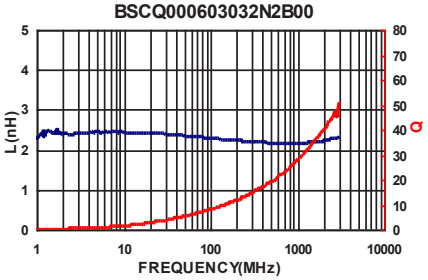

RDC<0.2Ω SRF:10000MHz IDC:500 mA

BSCQ000603032N3B00

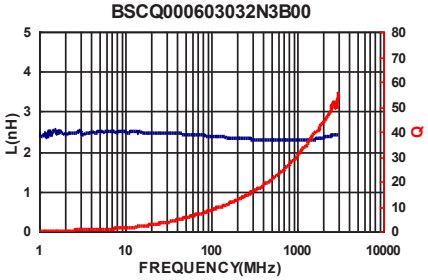

RDC<0.24Ω SRF:10000MHz IDC:460 mA

BSCQ000603032N4B00

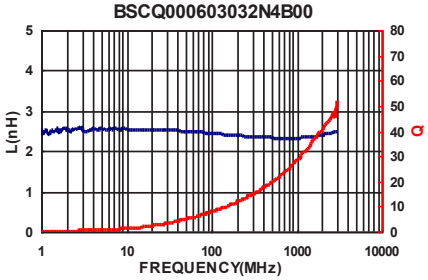

RDC<0.26Ω SRF:10000MHz IDC:430 mA

BSCQ000603032N5B00

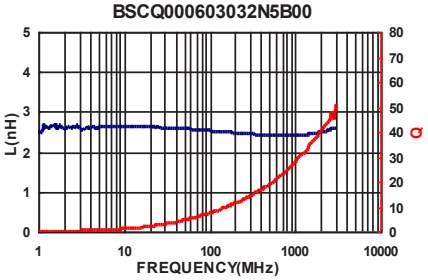

RDC<0.28Ω SRF:10000MHz IDC:415 mA

BSCQ000603032N6B00

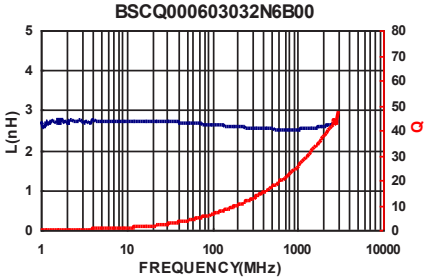

RDC<0.3Ω SRF:10000MHz IDC:405 mA

BSCQ000603032N7B00

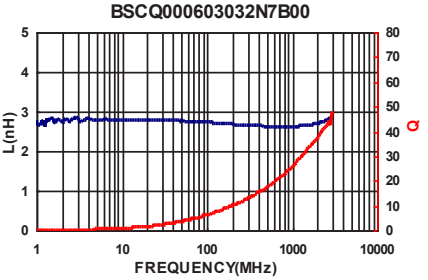

RDC<0.32Ω SRF:10000MHz IDC:400 mA

BSCQ000603032N8B00

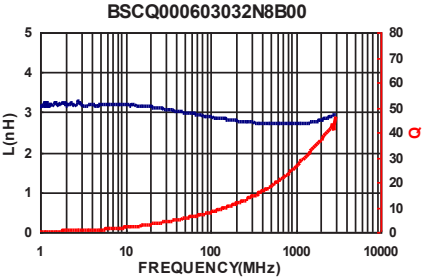

RDC<0.2Ω SRF:9500MHz IDC:500 mA

BSCQ000603032N9B00

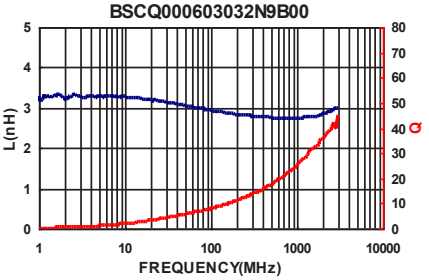

RDC<0.22Ω SRF:9300MHz IDC:480 mA

BSCQ000603033N0B00

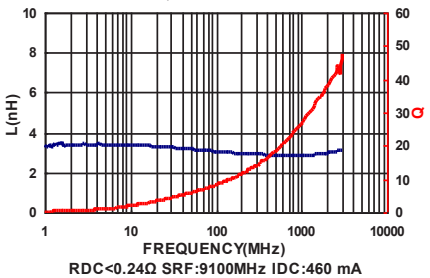

RDC<0.24Ω SRF:9100MHz IDC:460 mA

BSCQ000603033N1B00

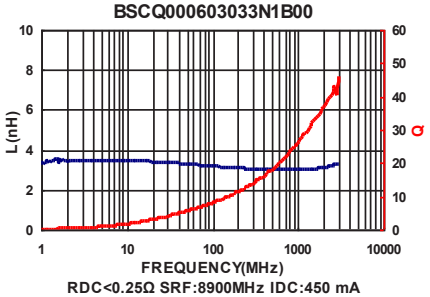

RDC<0.25Ω SRF:8900MHz IDC:450 mA

BSCQ000603033N2B00

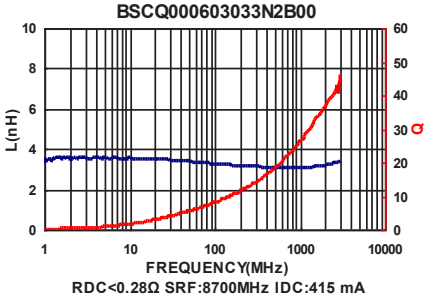

RDC<0.28Ω SRF:8700MHz IDC:415 mA

BSCQ000603033N3B00

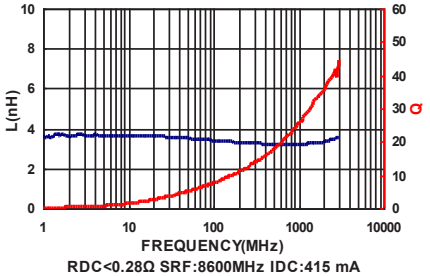

RDC<0.28Ω SRF:8600MHz IDC:415 mA

BSCQ000603033N4B00

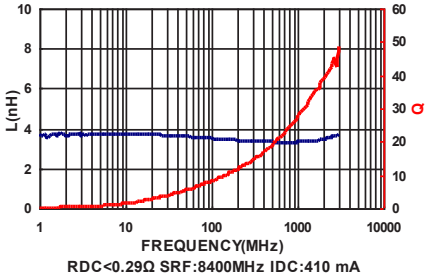

RDC<0.29Ω SRF:8400MHz IDC:410 mA

BSCQ000603033N5B00

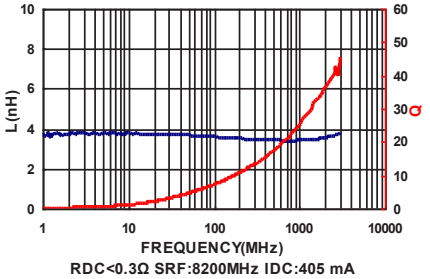

RDC<0.3Ω SRF:8200MHz IDC:405 mA

BSCQ000603033N6B00

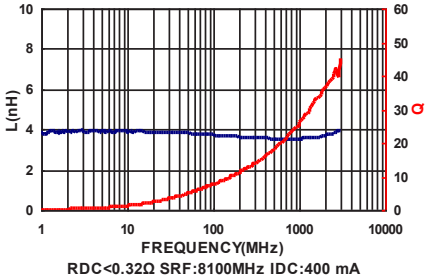

RDC<0.32Ω SRF:8100MHz IDC:400 mA

BSCQ000603033N7B00

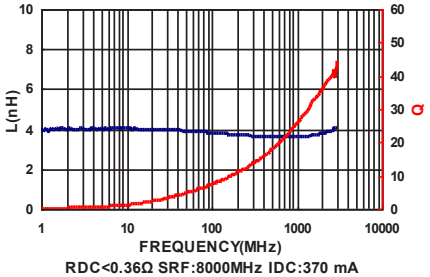

RDC<0.36Ω SRF:8000MHz IDC:370 mA

BSCQ000603033N8B00

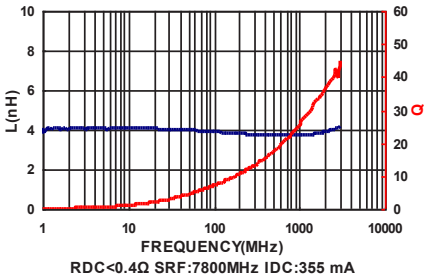

RDC<0.4Ω SRF:7800MHz IDC:355 mA

BSCQ000603033N9B00

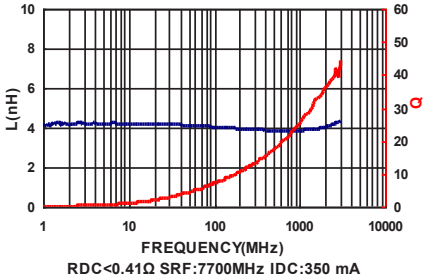

RDC<0.41Ω SRF:7700MHz IDC:350 mA

BSCQ000603034N3C00

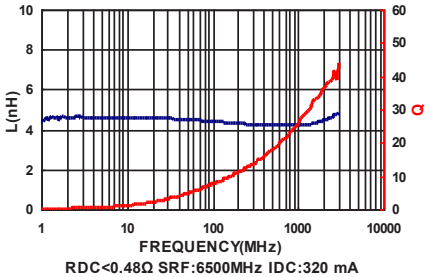

RDC<0.48Ω SRF:6500MHz IDC:320 mA

BSCQ000603034N7C00

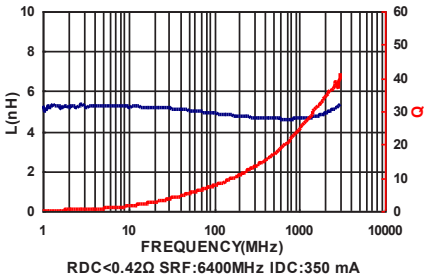

RDC<0.42Ω SRF:6400MHz IDC:350 mA

BSCQ000603035N1C00

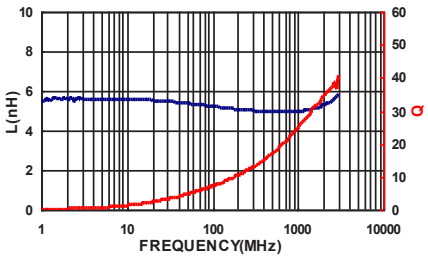

RDC<0.45Ω SRF:6100MHz IDC:330 mA

BSCQ000603035N6C00

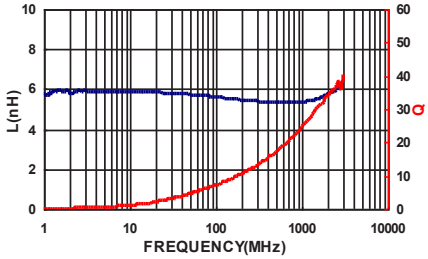

RDC<0.47Ω SRF:5500MHz IDC:325 mA

BSCQ000603036N2C00

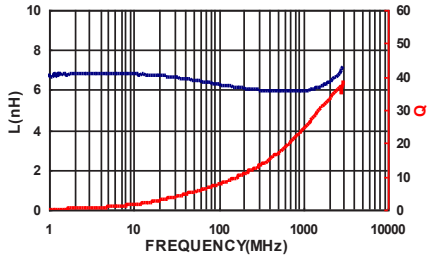

RDC<0.52Ω SRF:5100MHz IDC:305 mA

BSCQ000603036N8H00

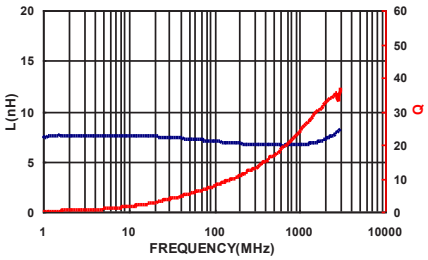

RDC<0.55Ω SRF:4800MHz IDC:305 mA

BSCQ000603037N5H00

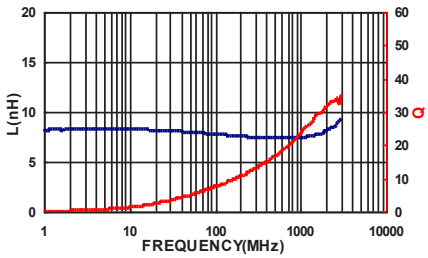

RDC<0.55Ω SRF:4600MHz IDC:305 mA

BSCQ000603038N2H00

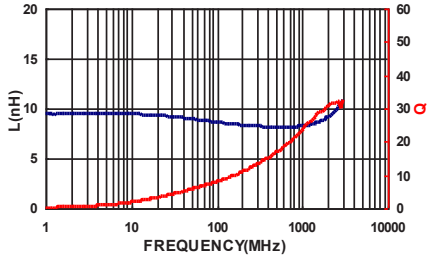

RDC<0.57Ω SRF:4300MHz IDC:290 mA

BSCQ000603039N1H00

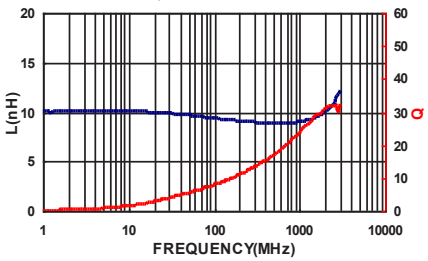

RDC<0.65Ω SRF:4000MHz IDC:270 mA

BSCQ0006030310NH00

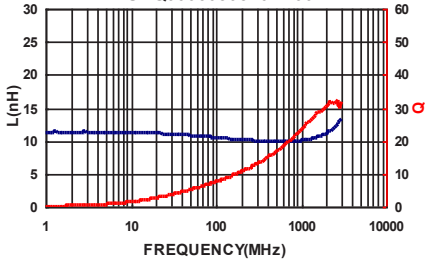

RDC<0.85Ω SRF:3800MHz IDC:230 mA

BSCQ0006030312NH00

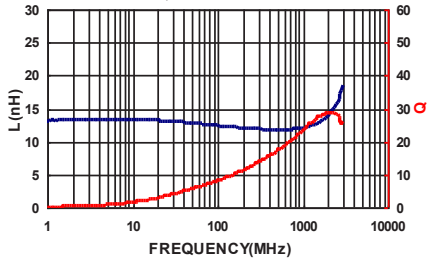

RDC<0.85Ω SRF:3300MHz IDC:230 mA

BSCQ0006030315NH00

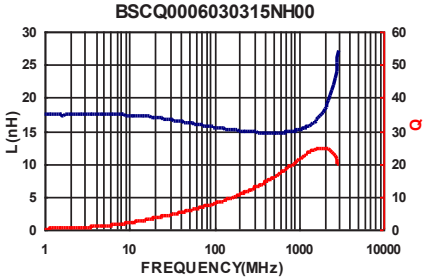

RDC<0.89Ω SRF:2600MHz IDC:220 mA

BSCQ0006030318NH00

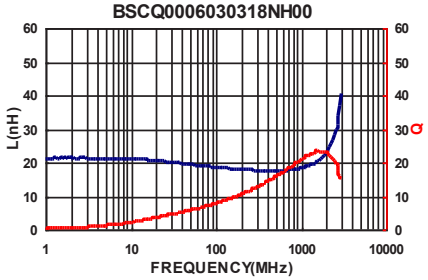

RDC<1.05Ω SRF:2300MHz IDC:205 mA

BSCQ0006030322NH00

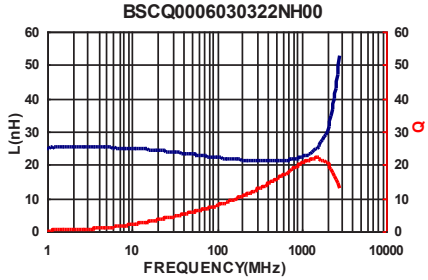

RDC<1.29Ω SRF:1900MHz IDC:190 mA

Electrical Characteristics

Part Number	Inductance (nH)	Tolerance (±%)	Q Min	Test Frequency (MHz)	SRF (MHz) Min	RDC (Ω) Max	IDC (mA) Max
BSCQ000603030N1□HR	0.1	±0.1nH/±0.2nH/±0.3nH	14	500	10000	0.06	900
BSCQ000603030N2□HR	0.2	±0.1nH/±0.2nH/±0.3nH	14	500	10000	0.06	900
BSCQ000603030N3□HR	0.3	±0.1nH/±0.2nH/±0.3nH	14	500	10000	0.06	900
BSCQ000603030N4□HR	0.4	±0.1nH/±0.2nH/±0.3nH	14	500	10000	0.06	900
BSCQ000603030N5□HR	0.5	±0.1nH/±0.2nH/±0.3nH	14	500	10000	0.07	850
BSCQ000603030N6□HR	0.6	±0.1nH/±0.2nH/±0.3nH	14	500	10000	0.07	850
BSCQ000603030N7□HR	0.7	±0.1nH/±0.2nH/±0.3nH	14	500	10000	0.08	800
BSCQ000603030N8□HR	0.8	±0.1nH/±0.2nH/±0.3nH	14	500	10000	0.09	760
BSCQ000603030N9□HR	0.9	±0.1nH/±0.2nH/±0.3nH	14	500	10000	0.12	640
BSCQ000603031N0□HR	1.0	±0.1nH/±0.2nH/±0.3nH	14	500	10000	0.15	600
BSCQ000603031N1□HR	1.1	±0.1nH/±0.2nH/±0.3nH	14	500	10000	0.19	510
BSCQ000603031N2□HR	1.2	±0.1nH/±0.2nH/±0.3nH	14	500	10000	0.11	680
BSCQ000603031N3□HR	1.3	±0.1nH/±0.2nH/±0.3nH	14	500	10000	0.12	640
BSCQ000603031N4□HR	1.4	±0.1nH/±0.2nH/±0.3nH	14	500	10000	0.13	620
BSCQ000603031N5□HR	1.5	±0.1nH/±0.2nH/±0.3nH	14	500	10000	0.15	600
BSCQ000603031N6□HR	1.6	±0.1nH/±0.2nH/±0.3nH	14	500	10000	0.16	550
BSCQ000603031N7□HR	1.7	±0.1nH/±0.2nH/±0.3nH	14	500	10000	0.20	500
BSCQ000603031N8□HR	1.8	±0.1nH/±0.2nH/±0.3nH	14	500	10000	0.24	460
BSCQ000603031N9□HR	1.9	±0.1nH/±0.2nH/±0.3nH	14	500	10000	0.26	430
BSCQ000603032N0□HR	2.0	±0.1nH/±0.2nH/±0.3nH	14	500	10000	0.28	415
BSCQ000603032N1□HR	2.1	±0.1nH/±0.2nH/±0.3nH	14	500	10000	0.30	405
BSCQ000603032N2□HR	2.2	±0.1nH/±0.2nH/±0.3nH	14	500	10000	0.32	400
BSCQ000603032N3□HR	2.3	±0.1nH/±0.2nH/±0.3nH	14	500	9500	0.20	500
BSCQ000603032N4□HR	2.4	±0.1nH/±0.2nH/±0.3nH	14	500	9300	0.22	480
BSCQ000603032N5□HR	2.5	±0.1nH/±0.2nH/±0.3nH	14	500	9100	0.24	460
BSCQ000603032N6□HR	2.6	±0.1nH/±0.2nH/±0.3nH	14	500	8900	0.25	450
BSCQ000603032N7□HR	2.7	±0.1nH/±0.2nH/±0.3nH	14	500	8700	0.28	415
BSCQ000603032N8□HR	2.8	±0.1nH/±0.2nH/±0.3nH	14	500	8600	0.28	415
BSCQ000603032N9□HR	2.9	±0.1nH/±0.2nH/±0.3nH	14	500	8400	0.29	410
BSCQ000603033N0□HR	3.0	±0.1nH/±0.2nH/±0.3nH	14	500	8200	0.30	405

BSCQ000603033N1□HR	3.1	±0.1nH/±0.2nH/±0.3nH	14	500	8100	0.32	400
BSCQ000603033N2□HR	3.2	±0.1nH/±0.2nH/±0.3nH	14	500	8000	0.36	370

Note: When ordering, please specify tolerance code. Tolerance : B=±0.1nH , C=±0.2nH , S=±0.3nH , H=±3% , J=±5%

- Operating temperature range - 55℃ ~ 125℃(Including self - temperature rise)
- IDC：Applied the current to coils, the inductance shall be less than 10% initial value
- Residual impedance of short chip : 0nH
- Measure Equipment：
  L & Q：Agilent E4991A+Agilent 16197A
  SRF：Agilent E4991A or HP19196C
  RDC：HP4338B or CHEN HWA 502

Electrical Characteristics

Part Number	Inductance (nH)	Tolerance (±%)	Q Min	Test Frequency (MHz)	SRF (MHz) Min	RDC (Ω) Max	IDC (mA) Max
BSCQ000603033N3□HR	3.3	±0.1nH/±0.2nH/±0.3nH	14	500	7800	0.40	355
BSCQ000603033N4□HR	3.4	±0.1nH/±0.2nH/±0.3nH	14	500	7700	0.41	350
BSCQ000603033N5□HR	3.5	±0.1nH/±0.2nH/±0.3nH	14	500	7700	0.41	350
BSCQ000603033N6□HR	3.6	±0.1nH/±0.2nH/±0.3nH	14	500	6500	0.48	320
BSCQ000603033N7□HR	3.7	±0.1nH/±0.2nH/±0.3nH	14	500	6500	0.48	320
BSCQ000603033N8□HR	3.8	±0.1nH/±0.2nH/±0.3nH	14	500	6500	0.48	320
BSCQ000603033N9□HR	3.9	±0.1nH/±0.2nH/±0.3nH	14	500	6500	0.48	320
BSCQ000603034N3□HR	4.3	±0.2nH/±0.3nH	14	500	6400	0.42	350
BSCQ000603034N7□HR	4.7	±0.2nH/±0.3nH	14	500	6100	0.45	330
BSCQ000603035N1□HR	5.1	±0.2nH/±0.3nH	14	500	5500	0.47	325
BSCQ000603035N6□HR	5.6	±0.2nH/±0.3nH	14	500	5100	0.52	305
BSCQ000603036N2□HR	6.2	±0.2nH/±0.3nH	14	500	4800	0.55	305
BSCQ000603036N8□HR	6.8	3 / 5	14	500	4600	0.55	305
BSCQ000603037N5□HR	7.5	3 / 5	14	500	4300	0.57	290
BSCQ000603038N2□HR	8.2	3 / 5	14	500	4000	0.65	270
BSCQ000603039N1□HR	9.1	3 / 5	14	500	3800	0.85	230
BSCQ0006030310N□HR	10	3 / 5	14	500	3800	0.85	230
BSCQ0006030312N□HR	12	3 / 5	12	500	3300	0.85	230
BSCQ0006030315N□HR	15	3 / 5	12	500	2600	0.89	220
BSCQ0006030318N□HR	18	3 / 5	12	500	2300	1.05	205

BSCQ0006030322N□HR	22	3 / 5	12	500	1900	1.29	190

Note: When ordering, please specify tolerance code. Tolerance : B=±0.1nH , C=±0.2nH , S=±0.3nH , H=±3% , J=±5%

- Operating temperature range - 55℃ ~ 125℃(Including self - temperature rise)
- IDC：Applied the current to coils, the inductance shall be less than 10% initial value
- Residual impedance of short chip : 0nH
- Measure Equipment：

  L & Q：Agilent E4991A+Agilent 16197A

  SRF：Agilent E4991A or HP19196C

  RDC：HP4338B or CHEN HWA 502

Test Instruments：Agilent E4991A Material/Impedance Analyzer

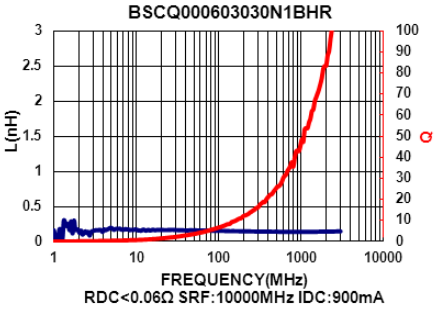

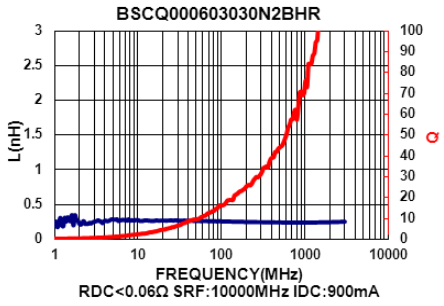

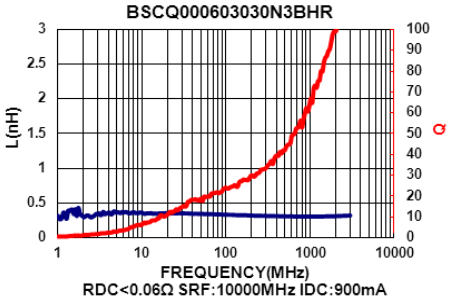

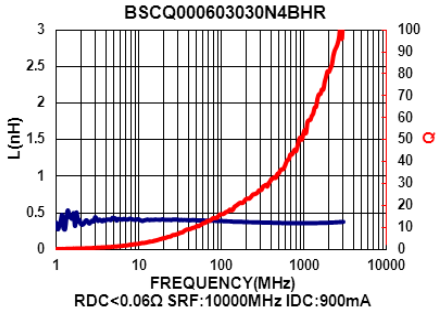

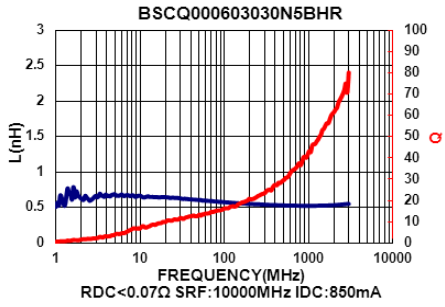

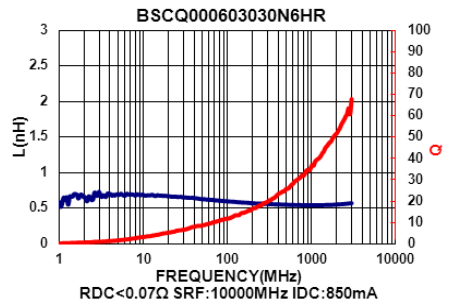

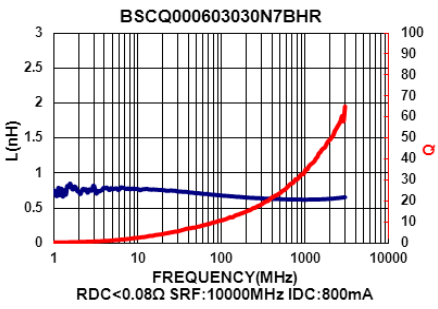

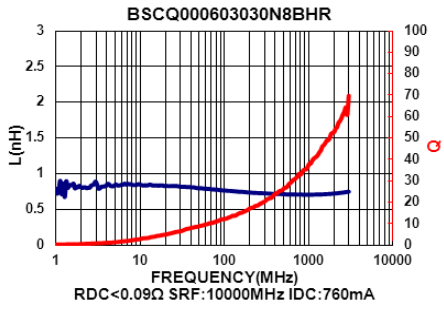

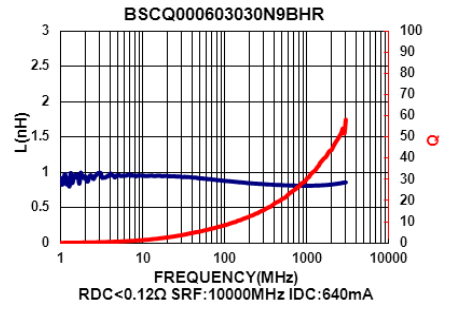

BSCQ000603031N0BHR

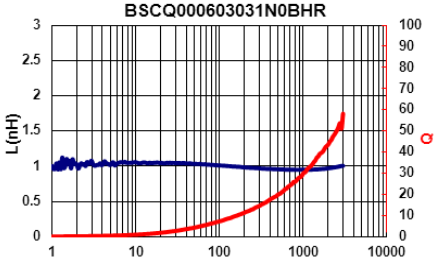

RDC<0.15Ω SRF:10000MHz IDC:600mA

BSCQ000603031N1BHR

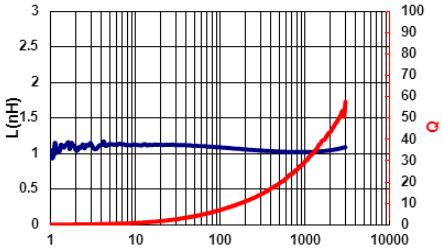

RDC<0.19Ω SRF:10000MHz IDC:510mA

BSCQ000603031N2BHR

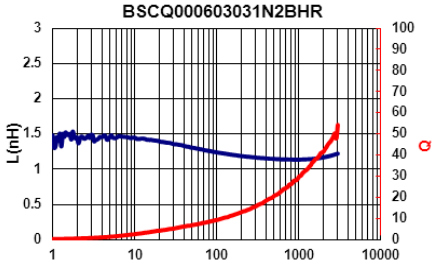

RDC<0.11Ω SRF:10000MHz IDC:680mA

BSCQ000603031N3BHR

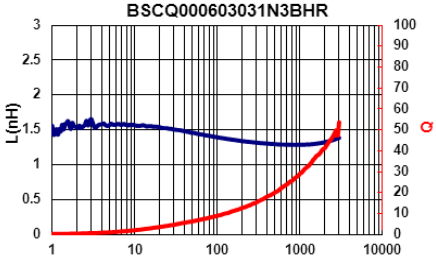

RDC<0.12Ω SRF:10000MHz IDC:640mA

BSCQ000603031N4BHR

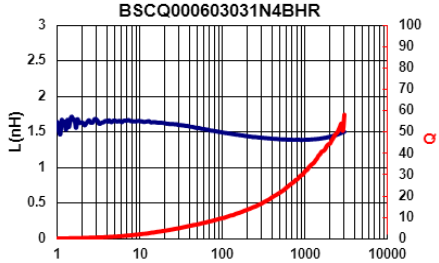

RDC<0.13Ω SRF:10000MHz IDC:620mA

BSCQ000603031N5BHR

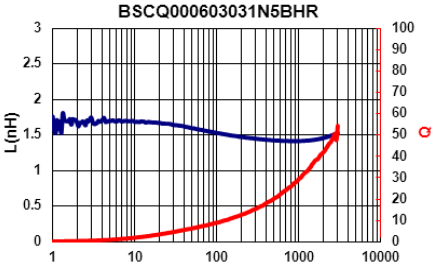

RDC<0.15Ω SRF:10000MHz IDC:600mA

BSCQ000603031N6BHR

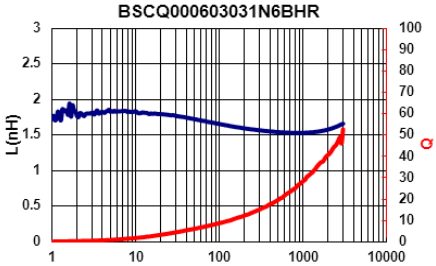

RDC<0.16Ω SRF:10000MHz IDC:550mA

BSCQ000603031N7BHR

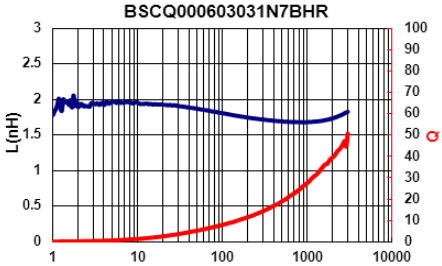

RDC<0.2Ω SRF:10000MHz IDC:500mA

BSCQ000603031N8BHR

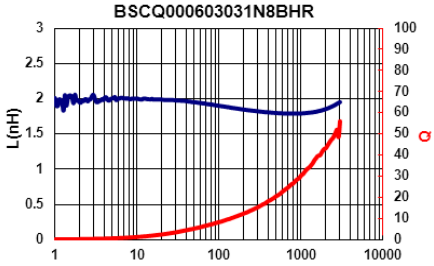

RDC<0.24Ω SRF:10000MHz IDC:460mA

BSCQ000603031N9BHR

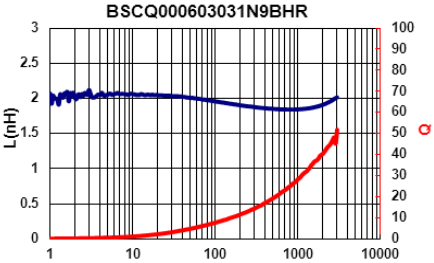

RDC<0.26Ω SRF:10000MHz IDC:430mA

BSCQ000603032N0BHR

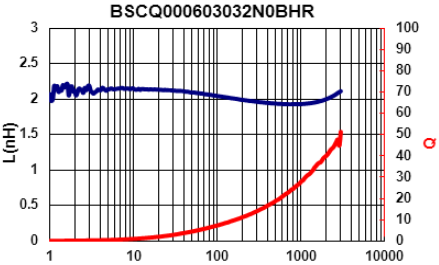

RDC<0.28Ω SRF:10000MHz IDC:415mA

BSCQ000603032N1BHR

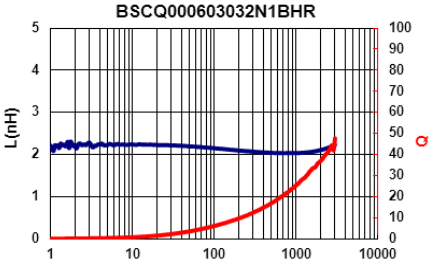

RDC<0.3Ω SRF:10000MHz IDC:405mA

BSCQ000603032N2BHR

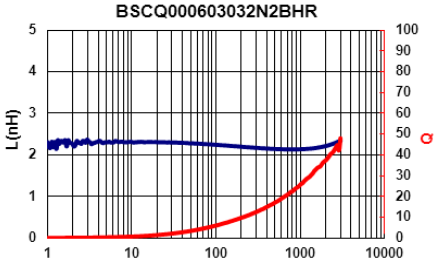

RDC<0.32Ω SRF:10000MHz IDC:400mA

BSCQ000603032N3BHR

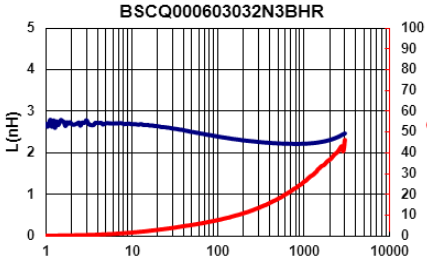

RDC<0.2Ω SRF:9500MHz IDC:500mA

BSCQ000603032N4BHR

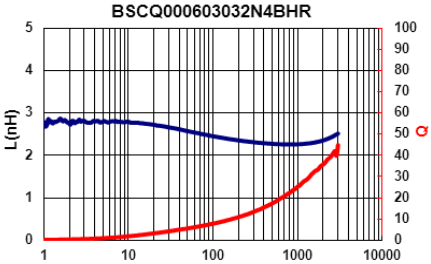

RDC<0.22Ω SRF:9300MHz IDC:480mA

BSCQ000603032N5BHR

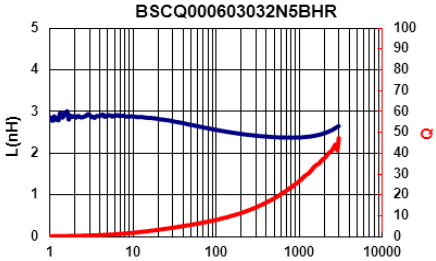

RDC<0.24Ω SRF:9100MHz IDC:460mA

BSCQ000603032N6BHR

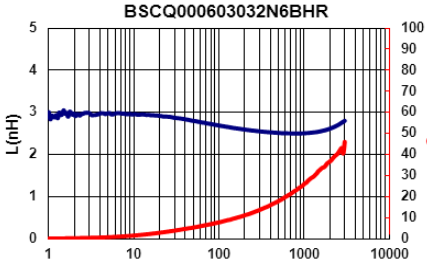

RDC<0.25Ω SRF:8900MHz IDC:450mA

BSCQ000603032N7BHR

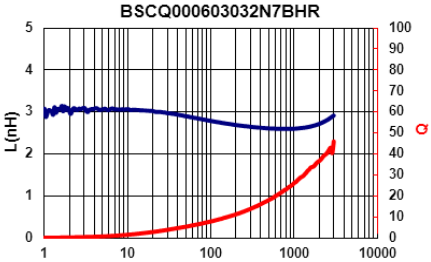

RDC<0.28Ω SRF:8700MHz IDC:415mA

BSCQ000603032N8BHR

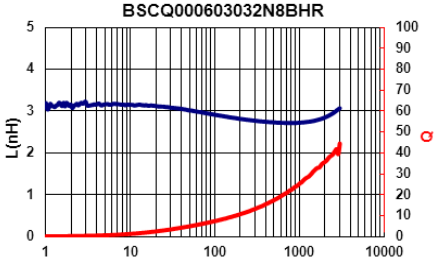

RDC<0.28Ω SRF:8600MHz IDC:415mA

BSCQ000603032N9BHR

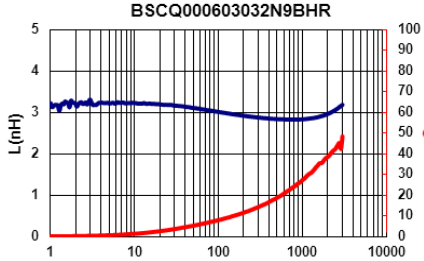

RDC<0.29Ω SRF:8400MHz IDC:410mA

BSCQ000603033N0BHR

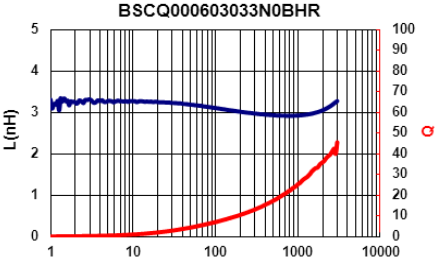

RDC<0.3Ω SRF:8200MHz IDC:405mA

BSCQ000603033N1BHR

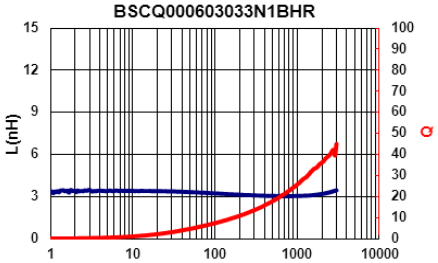

RDC<0.32Ω SRF:8100MHz IDC:400mA

BSCQ000603033N2BHR

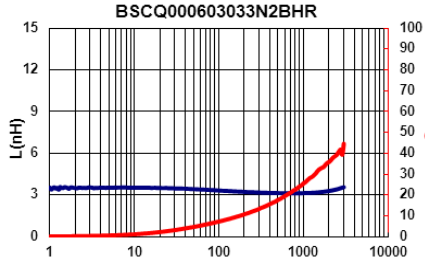

RDC<0.36Ω SRF:8000MHz IDC:370mA

BSCQ000603033N3BHR

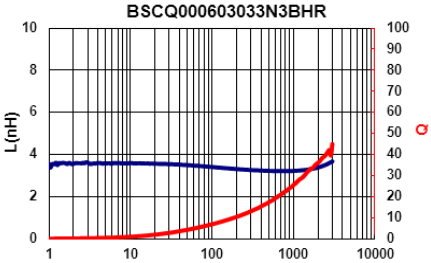

RDC<0.4Ω SRF:7800MHz IDC:355mA

BSCQ000603033N4BHR

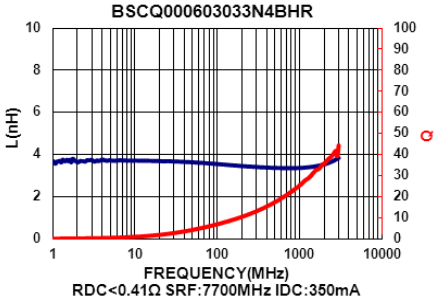

RDC<0.41Ω SRF:7700MHz IDC:350mA

BSCQ000603033N5BHR

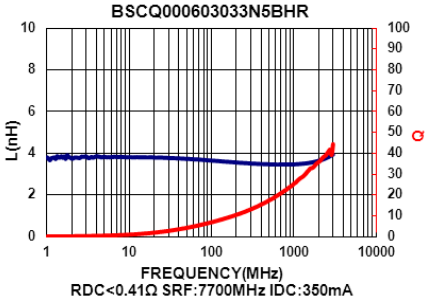

RDC<0.41Ω SRF:7700MHz IDC:350mA

BSCQ000603033N6BHR

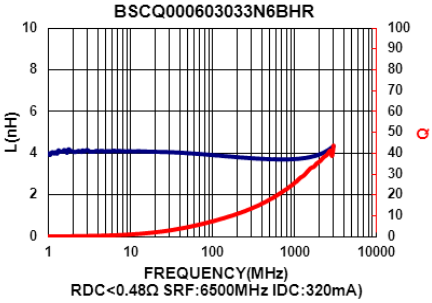

RDC<0.48Ω SRF:6500MHz IDC:320mA)

BSCQ000603033N7BHR

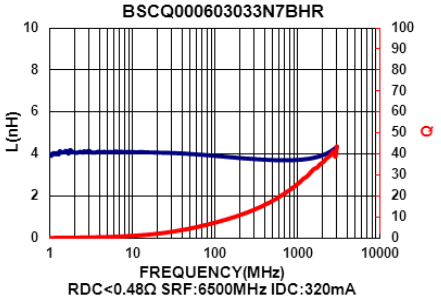

RDC<0.48Ω SRF:6500MHz IDC:320mA

BSCQ000603033N8BHR

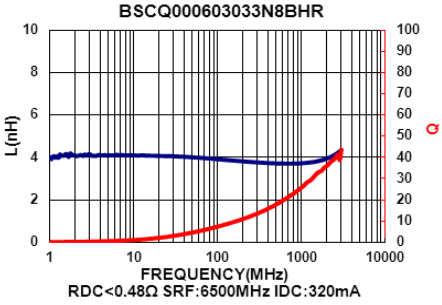

RDC<0.48Ω SRF:6500MHz IDC:320mA

BSCQ000603033N9BHR

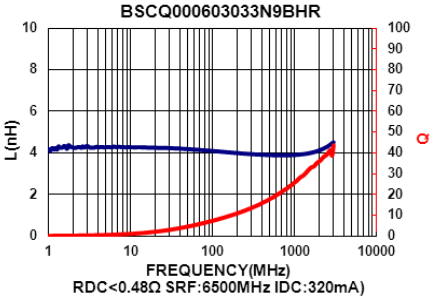

RDC<0.48Ω SRF:6500MHz IDC:320mA)

BSCQ000603034N3CHR

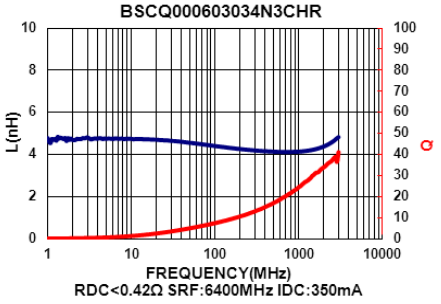

RDC<0.42Ω SRF:6400MHz IDC:350mA

BSCQ000603034N7CHR

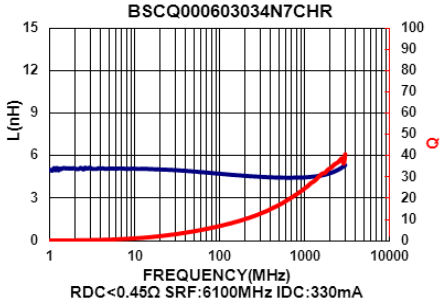

RDC<0.45Ω SRF:6100MHz IDC:330mA

BSCQ000603035N1CHR

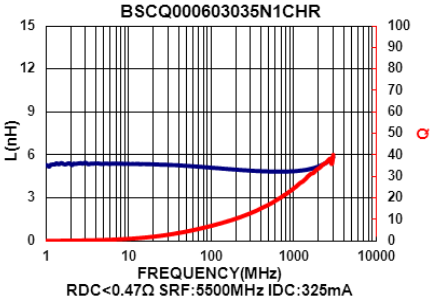

RDC<0.47Ω SRF:5500MHz IDC:325mA

BSCQ000603035N6CHR

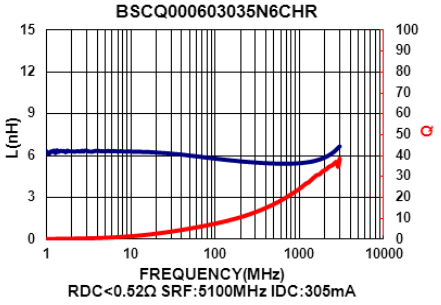

RDC<0.52Ω SRF:5100MHz IDC:305mA

BSCQ000603036N2CHR

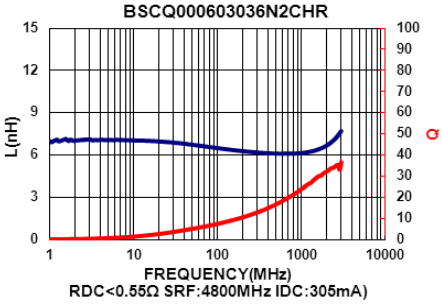

RDC<0.55Ω SRF:4800MHz IDC:305mA)

BSCQ000603036N8HHR

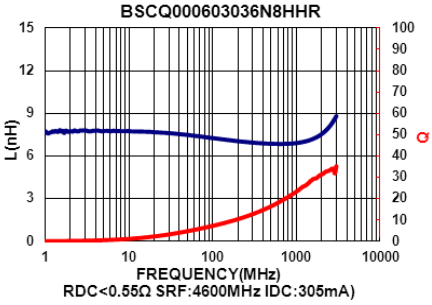

RDC<0.55Ω SRF:4600MHz IDC:305mA)

BSCQ000603037N5HHR

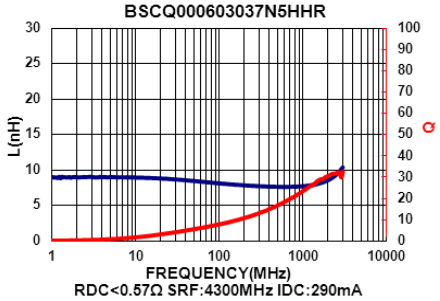

RDC<0.57Ω SRF:4300MHz IDC:290mA

BSCQ000603038N2HHR

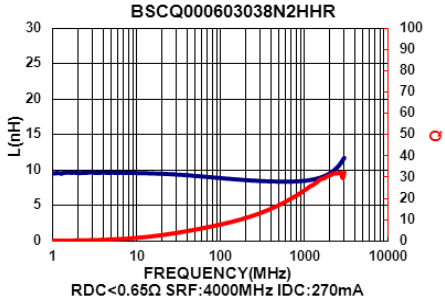

RDC<0.65Ω SRF:4000MHz IDC:270mA

BSCQ000603039N1HHR

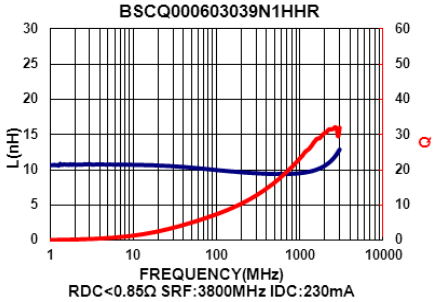

RDC<0.85Ω SRF:3800MHz IDC:230mA

BSCQ0006030310NHHR

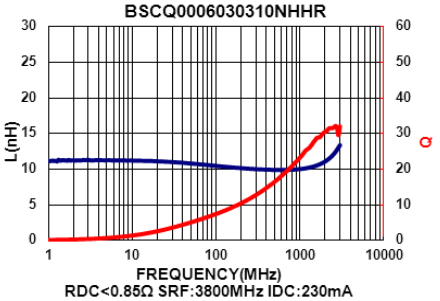

RDC<0.85Ω SRF:3800MHz IDC:230mA

BSCQ0006030312NHHR

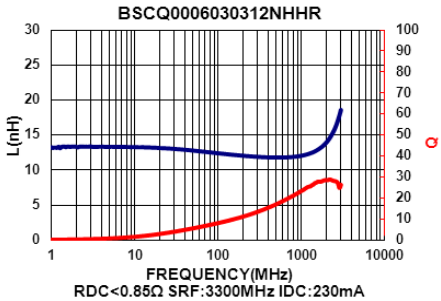

RDC<0.85Ω SRF:3300MHz IDC:230mA

BSCQ0006030315NHHR

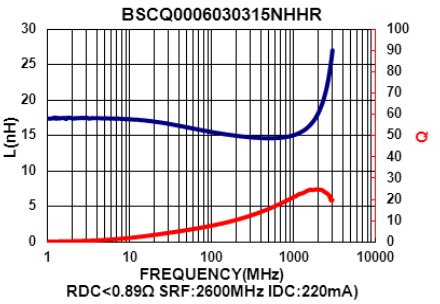

RDC<0.89Ω SRF:2600MHz IDC:220mA)

BSCQ0006030318NHHR

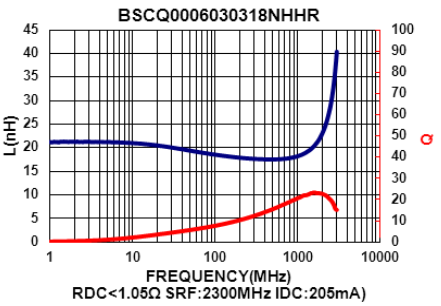

RDC<1.05Ω SRF:2300MHz IDC:205mA)

BSCQ0006030322NHHR

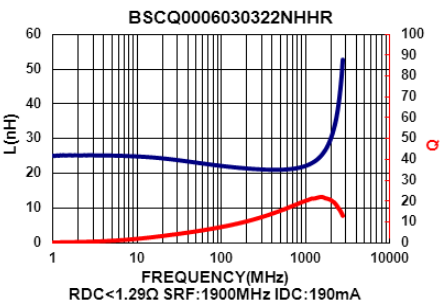

RDC<1.29Ω SRF:1900MHz IDC:190mA

Packaging Specifications

Tape Dimensions

Figure A

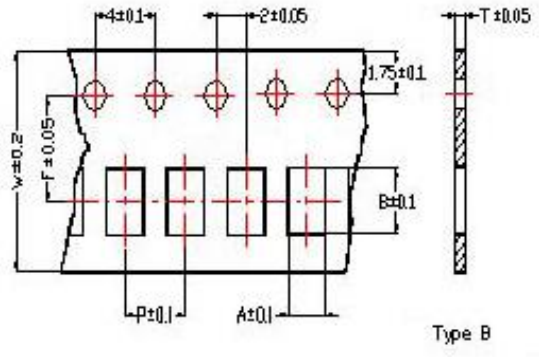

Tape Material

Figure A

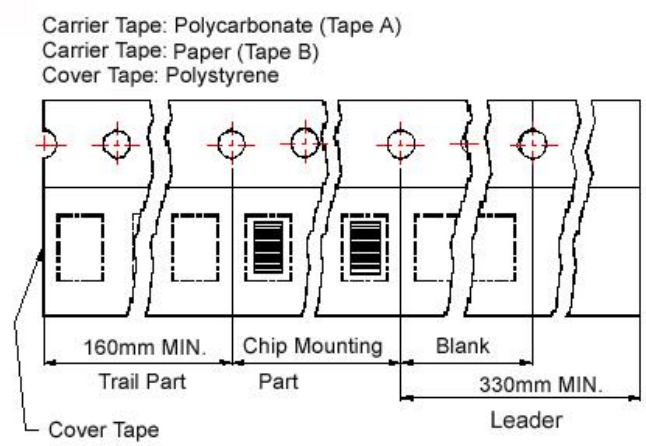

Figure B

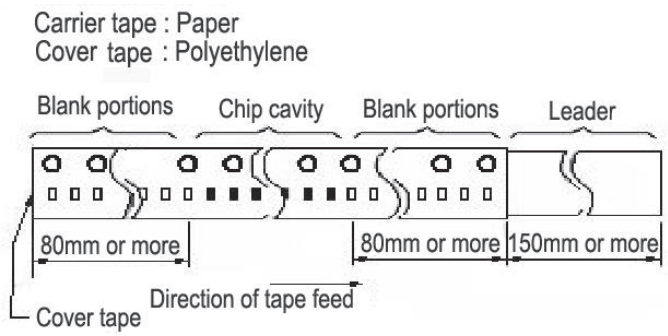

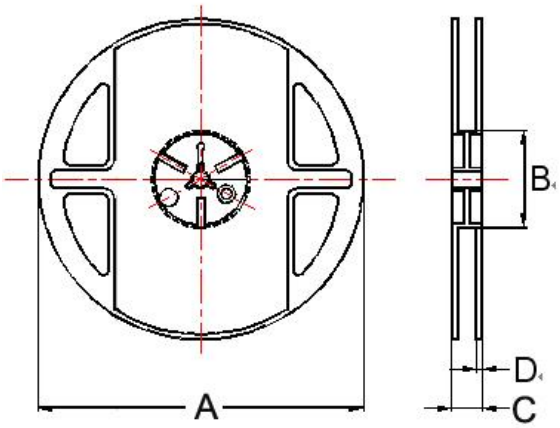

Dimensions in mm

TYPE	Tape Dimensions							Tape	Reel Dimensions				Quantity
	A	B	T	W	P	F	Tape	Material	A	B	C	D	PCS / Reel
BSCQ00060303	0.37	0.67	0.42	8	2	3.5	A	B	180	60	13	1.5	15000

For More Information:

Americas - prodinfo_power_americas@yageo.com | **Europe -** prodinfo_power_emea@yageo.com | **Asia -** prodinfo_power_asia@yageo.com

Performance warranty of products offered on this data sheet is limited to the parameters specified. Data is subject to change without notice. Other brand and product names mentioned herein may be trademarks or registered trademarks of their respective owners. © Copyright, 2022. Pulse Electronics, Inc. All rights reserved.

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

- View BSCQ000603032N7BHR on WIN SOURCE
- Chilisin Information

Optimize Your Supply Chain with WIN SOURCE Solutions

- Global Sourcing Solution
- Obsolete Management
- Cost Control Management
- Shortage Management
- Alternative Solution
- Excess Inventory Management