


THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO J.S.T. AND SHALL NOT BE USED OR SHOWN WITHOUT WRITTEN PERMISSION.

Item No.	Part No.	Description	APPLICABLE HOUSINGS				
			NO. OF CIRCUITS	HOUSING PART NO. WITH PANEL LOCKS FOR MALE CONTACT	HOUSING PART NO. WITHOUT PANEL LOCKS FOR MALE CONTACT	HOUSING PART NO. INNER LOCKS - FOR FEMALE CONTACT	HOUSING PART NO. OUTER LOCKS - FOR FEMALE CONTACT
1	SVM-61T-P2.0	VL Connector Male Contact					
2	SVF-61T-P2.0	VL Connector Female Contact					
3	UL1015, 14 AWG	Black	1	-	VLR-01VF	VLP-01V	VLP-01V-1
			2	VLR-02V	VLR-02VF	VLP-02V	VLP-02V-1
			3	VLR-03V	-	VLP-03V	VLP-03V-1
			4	VLR-04V	VLR-04VF	VLP-04V	VLP-04V-1
			4	VLR-04VN	-	-	VLP-04VN-1
			6	VLR-06V	-	VLP-06V	VLP-06V-1
			8	VLR-08V	-	VLP-08V	VLP-08V-1
			12	VLR-12V	-	VLP-12V	VLP-12V-1

Electrical Specifications
Current: 20.0AAC/DC
Voltage: 600V AC/DC

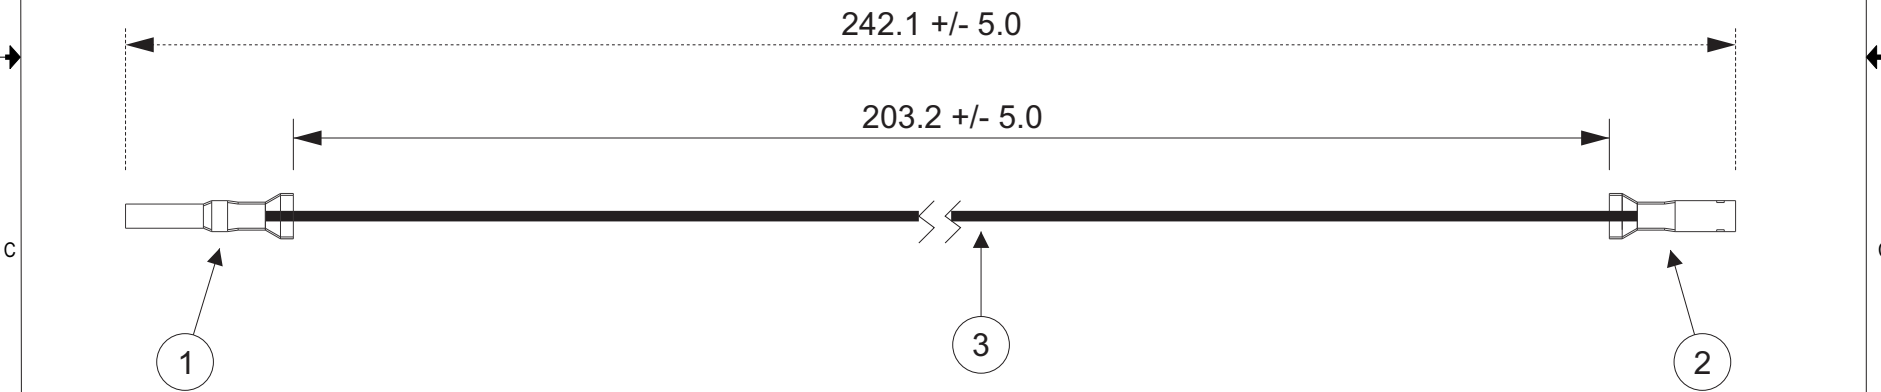

All dimensions are in millimeters with a default tolerance of +/- 5.0 unless otherwise specified.		CUSTOMER NAME		
		DESCRIPTION		
		6.2mm Pitch VL Series Standard Leads - 8" Inside Length DOUBLE END LEADS, M-F		
Drawn By: Larissa Mosley	SIZE	CUSTOMER PART NO.	PART NO.	REV
Checked By: Steven Pilkington	SCALE 1:1	DRAWING NO. GAM-449	ASVMSVF14K203	DATE 6/5/2018

ZONE	REV	DESCRIPTION	DATE	APPROVED
	1	Add Electrical Specifications	7/03/2018	LM

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

- ⊖ [View VLR-02VF on WIN SOURCE](#)
- ⊖ [JST Sales America Inc. Information](#)

Optimize Your Supply Chain with WIN SOURCE Solutions

- ✓ Global Sourcing Solution
- ✓ Obsolete Management
- ✓ Cost Control Management
- ✓ Shortage Management
- ✓ Alternative Solution
- ✓ Excess Inventory Management