






**THE DATASHEET OF  
3020-20-0300-00-TR**




2 3 4 5




Specifications:  
 Current Rating:3.0A AC,DC  
 Voltage Rating:250V AC, DC  
 Contact Resistance:20m ohm Max  
 Insulation Resistance:1,000M ohm Min  
 Withstanding Voltage:600V AC/minute  
 Operating Temperature Range:-40°C ~ +105°C

Materials:  
 Insulator:Nylon 9T(UL94V-0)  
 Insulator Color:Black  
 Terminal:Copper Alloy  
 Finish:Gold Flash

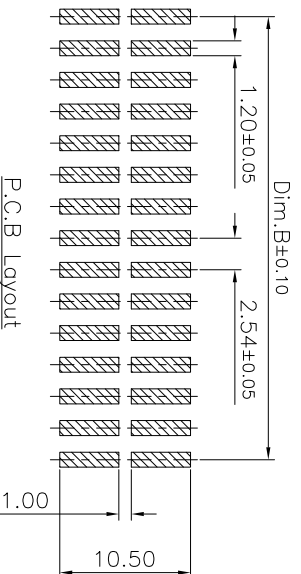

Pos	Dim A	Dim B	Dim C
6	15.24	5.08	12.94
8	17.78	7.62	15.48
10	20.32	10.16	18.02
14	25.40	15.24	23.10
16	27.94	17.78	25.64
20	33.02	22.86	30.72
26	40.64	30.48	38.34
40	58.42	48.26	56.12
50	71.12	60.96	68.82

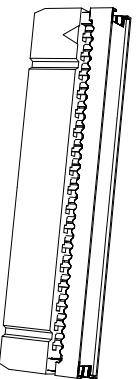

MATING PART  
 3030-XX-01101-00

RoHS Compliant

DRAWN:

Romina Wu

CHECKED:

Jerry Chen

APPROVAL:

Rory Chen

GENERAL TOLERANCE:

.X = ±0.20

.XX = ±0.15

UNIT: MM

SCALE:1:1

SHEET: 1 / 2

PROJECTION:



DESCRIPTION:

IDC BOX HEADER,0.100"(2.54mm),SMT

PART NO:

3020-XX-0300-00-TR

SIZE

A4

**CnC Tech**  
 Industrial Cable and Connector Technology

C

B

A

D

## Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

- ⊖ [View 3020-20-0300-00-TR](#) on WIN SOURCE
- ⊖ [CNC Tech](#) Information

## Optimize Your Supply Chain with WIN SOURCE Solutions

- ✓ Global Sourcing Solution
- ✓ Obsolete Management
- ✓ Cost Control Management
- ✓ Shortage Management
- ✓ Alternative Solution
- ✓ Excess Inventory Management