



BDCD Series provides high current in compact package size with magnetically shielded construction. This power inductor is an excellent power solution for space-limited devices.


Features

- RoHS, Halogen Free and REACH Compliance
- Monolithic, magnetically shielded
- Capable for large current


Applications

- Smartphones, tablets and wearable devices
- HDD, SSD and PC peripheral devices
- DSC, camcoders
- PND
- DC/DC converters


Product Identification

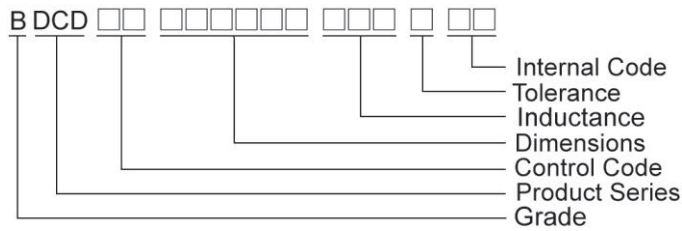

Shape and Dimensions

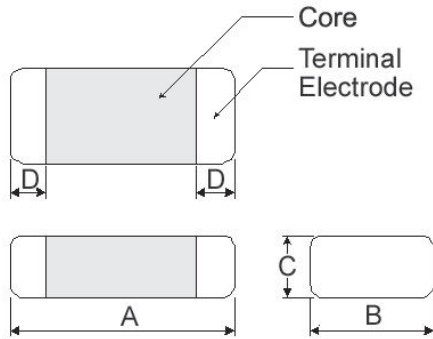

Recommended Pattern

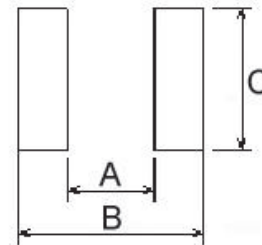

Dimensions in mm

| TYPE | A | B | C | D |
|--------------|---------|---------|--------|---------|
| BDCD00201610 | 2.0±0.2 | 1.6±0.2 | 1.0Max | 0.5±0.3 |
| BDCD00201612 | 2.0±0.2 | 1.6±0.2 | 1.2Max | 0.5±0.3 |
| BDCD00252010 | 2.5±0.2 | 2.0±0.2 | 1.0Max | 0.6±0.3 |
| BDCD00252012 | 2.5±0.2 | 2.0±0.2 | 1.2Max | 0.6±0.3 |
| BDCD00322510 | 3.2±0.3 | 2.5±0.3 | 1.0Max | 0.5±0.3 |
| BDCD00322512 | 3.2±0.3 | 2.5±0.3 | 1.2Max | 0.5±0.3 |

Dimensions in mm

| TYPE | A | B | C |
|--------------|-----|-----|-----|
| BDCD00201610 | 0.7 | 2.3 | 1.8 |
| BDCD00201612 | 0.7 | 2.3 | 1.8 |
| BDCD00252010 | 1.2 | 2.8 | 2.3 |
| BDCD00252012 | 1.2 | 2.8 | 2.3 |
| BDCD00322510 | 1.7 | 3.5 | 2.8 |
| BDCD00322512 | 1.7 | 3.5 | 2.8 |



Electrical Characteristics

| Part Number | Inductance (uH) | Tolerance (±%) | Test Frequency (MHz) | RDC(mΩ) Max(Typ.) | Isat(A) Max(Typ.) | Irms(A) Max(Typ.) |
|--------------------|-----------------|----------------|----------------------|-------------------|-------------------|-------------------|
| BDCD00201610R24MS1 | 0.24 | 20 | 2 | 40(28) | 4.2(6.0) | 4.0(4.5) |
| BDCD00201610R33MS1 | 0.33 | 20 | 2 | 48(40) | 4.0(5.5) | 3.5(3.8) |
| BDCD00201610R47MS1 | 0.47 | 20 | 2 | 54(44) | 3.2(5.0) | 3.0(3.6) |
| BDCD00201610R56MS1 | 0.56 | 20 | 2 | 59(46) | 2.8(4.6) | 2.8(3.3) |
| BDCD00201610R68MS1 | 0.68 | 20 | 2 | 72(55) | 2.7(4.2) | 2.4(3.0) |
| BDCD002016101R0MS1 | 1.0 | 20 | 2 | 96(81) | 2.2(3.4) | 2.0(2.3) |
| BDCD002016101R5MS1 | 1.5 | 20 | 2 | 150(122) | 2.1(2.8) | 1.6(2.0) |
| BDCD002016102R2MS1 | 2.2 | 20 | 2 | 204(170) | 2.0(2.4) | 1.3(1.6) |

Note: When ordering, please specify tolerance code. Tolerance: M=±20%

- Operating temperature range - 40°C ~ 125°C(Including self - temperature rise)
- Isat for Inductance drop 30% from its value without current
- I rms for a 40°C temperature rise from 25°C ambient with current
- Rated current : Isat or I rms, whichever is smaller
- Absolute maximum voltage 20VDC
- Measure Equipment :
 L : Agilent E4991/HP4286A+16197A (or equivalent), 2MHz 0.2V
 RDC : CHEN HWA502BC/HP4338B (or equivalent)
 Isat : Agilent E4980A+HP42841A (or equivalent)
 I rms : Agilent 6641 SYSTEM DC POWER SUPPLY (or equivalent)

Test Instruments : E4991A Impedance / Material Analyzer

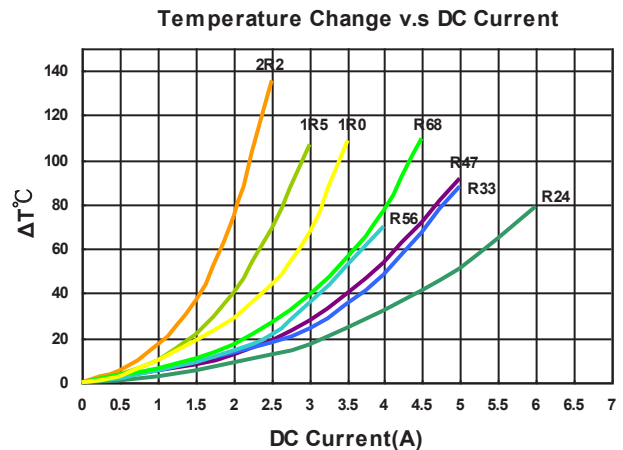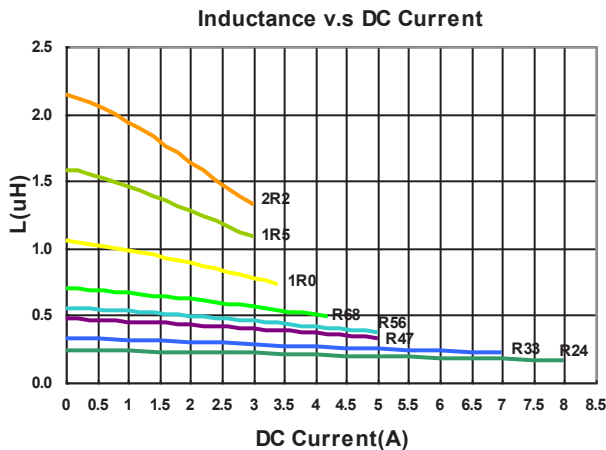

Electrical Characteristics


| Part Number | Inductance (uH) | Tolerance (±%) | Test Frequency (MHz) | RDC(mΩ) Max(Typ.) | Isat(A) Max(Typ.) | Irms(A) Max(Typ.) |
|--------------------|-----------------|----------------|----------------------|-------------------|-------------------|-------------------|
| BDCD00201610R24ML1 | 0.24 | 20 | 2 | 30(23) | 5.0(6.0) | 3.8(4.4) |
| BDCD00201610R33ML1 | 0.33 | 20 | 2 | 35(27) | 4.5(5.0) | 3.4(3.8) |
| BDCD00201610R47ML1 | 0.47 | 20 | 2 | 41(34) | 4.0(4.5) | 2.9(3.3) |
| BDCD00201610R68ML1 | 0.68 | 20 | 2 | 53(44) | 3.3(3.6) | 2.5(2.9) |
| BDCD002016101R0ML1 | 1.0 | 20 | 2 | 72(60) | 2.8(3.2) | 2.2(2.5) |
| BDCD002016101R5ML1 | 1.5 | 20 | 2 | 110(92) | 2.2(2.8) | 1.8(2.1) |
| BDCD002016102R2ML1 | 2.2 | 20 | 2 | 170(142) | 1.8(2.1) | 1.5(1.7) |

Note: When ordering, please specify tolerance code. Tolerance: M=±20%


- Operating temperature range - 40°C ~ 125°C(Including self - temperature rise)
- Isat for Inductance drop 30% from its value without current
- I rms for a 40°C temperature rise from 25°C ambient with current
- Rated current : Isat or I rms, whichever is smaller
- Absolute maximum voltage 20VDC
- Measure Equipment :
 L : Agilent E4991/HP4286A+16197A (or equivalent), 2MHz 0.2V
 RDC : CHEN HWA502BC/HP4338B (or equivalent)
 Isat : Agilent E4980A+HP42841A (or equivalent)
 I rms : Agilent 6641 SYSTEM DC POWER SUPPLY (or equivalent)

Test Instruments : E4991A Impedance / Material Analyzer

Inductance v.s DC Current

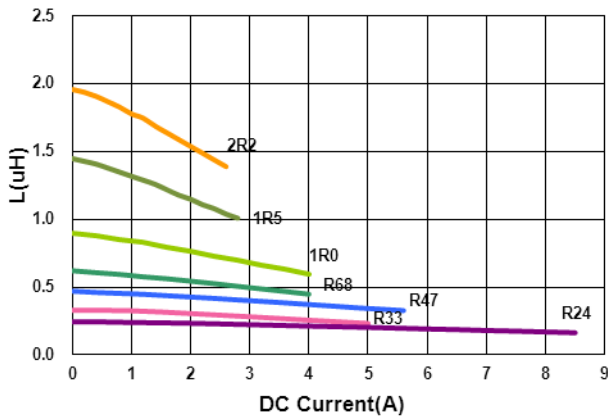

Temperature Change v.s DC Current

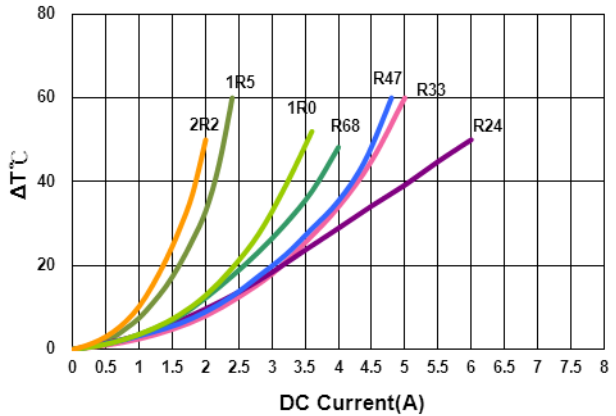



Electrical Characteristics

| Part Number | Inductance (uH) | Tolerance (±%) | Test Frequency (MHz) | RDC(mΩ) Max(Typ.) | Isat(A) Max(Typ.) | Irms(A) Max(Typ.) |
|--------------------|-----------------|----------------|----------------------|-------------------|-------------------|-------------------|
| BDCD00201612R24MS1 | 0.24 | 20 | 2 | 35(25) | 5.5(6.5) | 4.2(4.8) |
| BDCD00201612R47MS1 | 0.47 | 20 | 2 | 52(40) | 3.8(5.1) | 3.2(3.8) |
| BDCD00201612R68MS1 | 0.68 | 20 | 2 | 70(53) | 3.3(4.8) | 2.6(3.2) |
| BDCD002016121R0MS1 | 1.0 | 20 | 2 | 82(67) | 3.1(3.9) | 2.3(2.7) |
| BDCD002016121R5MS1 | 1.5 | 20 | 2 | 120(95) | 2.6(3.2) | 2.2(2.6) |
| BDCD002016122R2MS1 | 2.2 | 20 | 2 | 195(165) | 2.0(2.6) | 1.3(1.7) |

Note: When ordering, please specify tolerance code. Tolerance: M=±20%

- Operating temperature range - 40°C ~ 125°C(Including self - temperature rise)
- Isat for Inductance drop 30% from its value without current
- I rms for a 40°C temperature rise from 25°C ambient with current
- Rated current : Isat or I rms, whichever is smaller
- Absolute maximum voltage 20VDC
- Measure Equipment :
 - L : Agilent E4991/HP4286A+16197A (or equivalent), 2MHz 0.2V
 - RDC : CHEN HWA502BC/HP4338B (or equivalent)
 - Isat : Agilent E4980A+HP42841A (or equivalent)
 - I rms : Agilent 6641 SYSTEM DC POWER SUPPLY (or equivalent)

Test Instruments : E4991A Impedance / Material Analyzer

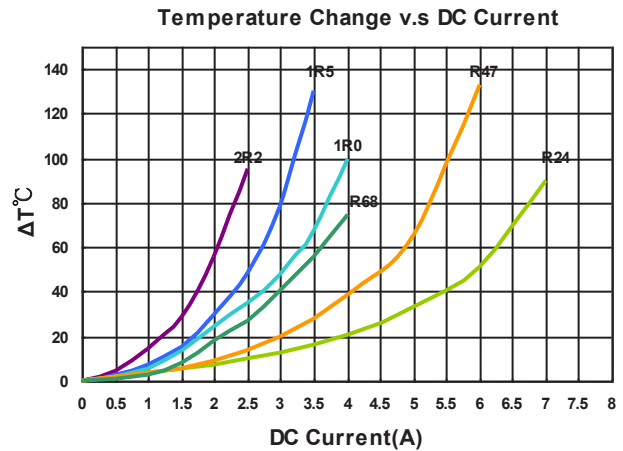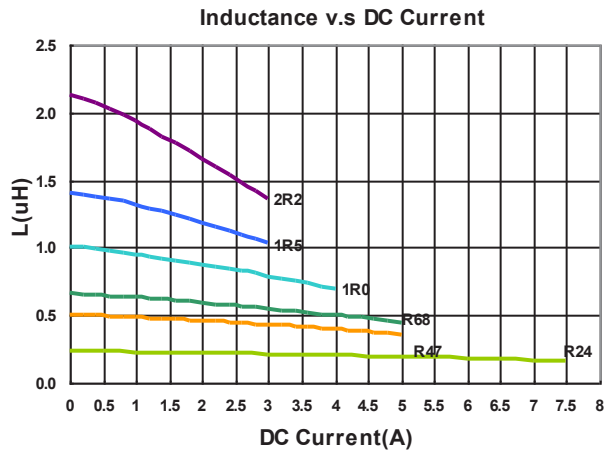



Electrical Characteristics

| Part Number | Inductance (uH) | Tolerance (±%) | Test Frequency (MHz) | RDC(mΩ) Max(Typ.) | Isat(A) Max(Typ.) | Irms(A) Max(Typ.) |
|--------------------|-----------------|----------------|----------------------|-------------------|-------------------|-------------------|
| BDCD00252010R24MS1 | 0.24 | 20 | 2 | 40(24) | 7.5(9.5) | 4.5(5.0) |
| BDCD00252010R47MS1 | 0.47 | 20 | 2 | 46(36) | 5.2(6.5) | 3.1(3.6) |
| BDCD00252010R68MS1 | 0.68 | 20 | 2 | 65(49) | 3.8(5.0) | 2.9(3.3) |
| BDCD002520101R0MS1 | 1.0 | 20 | 2 | 78(60) | 3.4(4.3) | 2.5(3.0) |
| BDCD002520101R5MS1 | 1.5 | 20 | 2 | 105(82) | 3.2(4.0) | 2.2(2.9) |
| BDCD002520102R2MS1 | 2.2 | 20 | 2 | 156(130) | 2.6(3.2) | 1.4(1.8) |

Note: When ordering, please specify tolerance code. Tolerance: M=±20%

- Operating temperature range - 40°C ~ 125°C(Including self - temperature rise)
- Isat for Inductance drop 30% from its value without current
- Irms for a 40°C temperature rise from 25°C ambient with current
- Rated current : Isat or Irms, whichever is smaller
- Absolute maximum voltage 20VDC
- Measure Equipment :
 - L : Agilent E4991/HP4286A+16197A (or equivalent), 2MHz 0.2V
 - RDC : CHEN HWA502BC/HP4338B (or equivalent)
 - Isat : Agilent E4980A+HP42841A (or equivalent)
 - Irms : Agilent 6641 SYSTEM DC POWER SUPPLY (or equivalent)

Test Instruments : E4991A Impedance / Material Analyzer

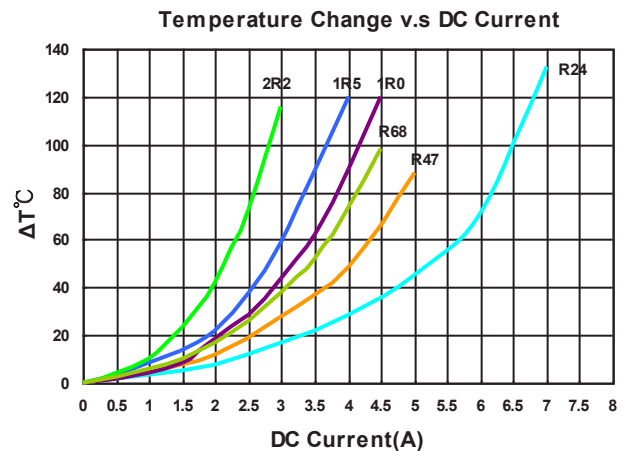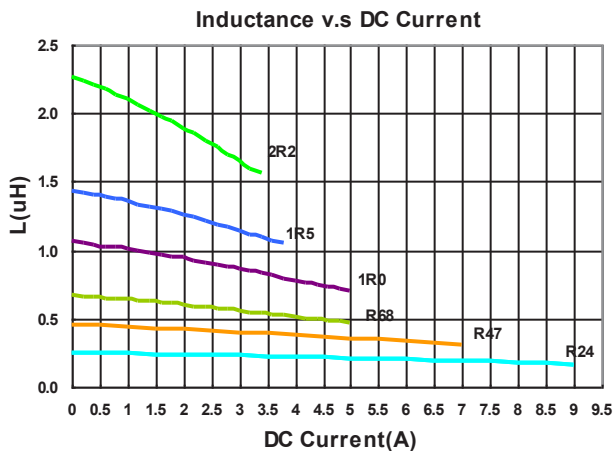

Electrical Characteristics


| Part Number | Inductance (uH) | Tolerance (±%) | Test Frequency (MHz) | RDC(mΩ) Max(Typ.) | Isat(A) Max(Typ.) | Irms(A) Max(Typ.) |
|--------------------|-----------------|----------------|----------------------|-------------------|-------------------|-------------------|
| BDCD00252010R33ML1 | 0.33 | 20 | 2 | 31(25) | 5.0(6.0) | 3.8(4.4) |
| BDCD00252010R47ML1 | 0.47 | 20 | 2 | 35(29) | 4.2(4.7) | 3.4(3.9) |
| BDCD00252010R68ML1 | 0.68 | 20 | 2 | 48(40) | 3.7(4.0) | 3.0(3.5) |
| BDCD002520101R0ML1 | 1.0 | 20 | 2 | 65(54) | 3.2(3.6) | 2.6(3.0) |
| BDCD002520101R5ML1 | 1.5 | 20 | 2 | 94(78) | 2.9(3.3) | 2.1(2.4) |
| BDCD002520102R2ML1 | 2.2 | 20 | 2 | 120(100) | 2.3(2.7) | 1.8(2.1) |

Note: When ordering, please specify tolerance code. Tolerance: M=±20%


- Operating temperature range - 40°C ~ 125°C(Including self - temperature rise)
- Isat for Inductance drop 30% from its value without current
- I rms for a 40°C temperature rise from 25°C ambient with current
- Rated current : Isat or I rms, whichever is smaller
- Absolute maximum voltage 20VDC
- Measure Equipment :
 L : Agilent E4991/HP4286A+16197A (or equivalent), 2MHz 0.2V
 RDC : CHEN HWA502BC/HP4338B (or equivalent)
 Isat : Agilent E4980A+HP42841A (or equivalent)
 I rms : Agilent 6641 SYSTEM DC POWER SUPPLY (or equivalent)

Test Instruments : E4991A Impedance / Material Analyzer

Inductance v.s DC Current

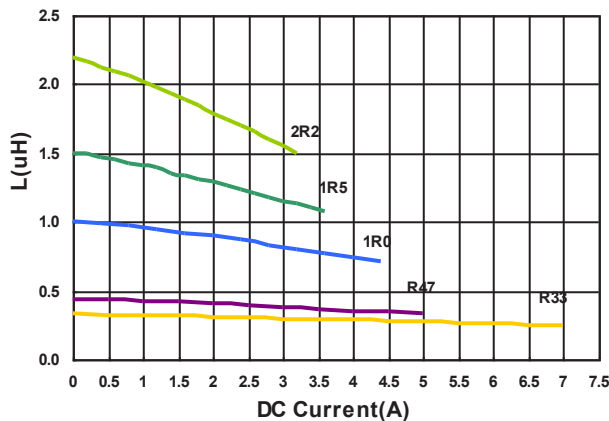

Temperature Change v.s DC Current

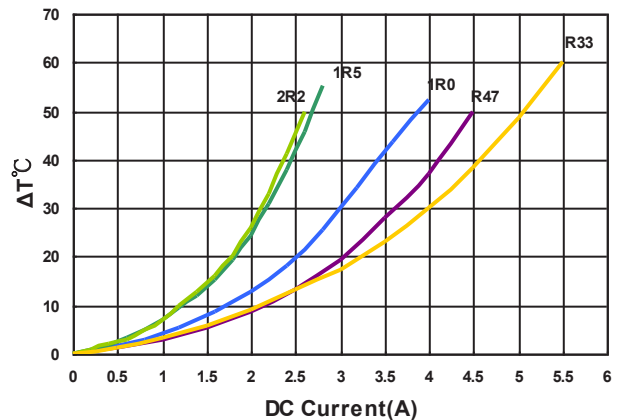



Electrical Characteristics

| Part Number | Inductance (uH) | Tolerance (±%) | Test Frequency (MHz) | RDC(mΩ) Max(Typ.) | Isat(A) Max(Typ.) | Irms(A) Max(Typ.) |
|--------------------|-----------------|----------------|----------------------|-------------------|-------------------|-------------------|
| BDCD00252012R33MS1 | 0.33 | 20 | 2 | 35(27) | 6.8(8.5) | 4.0(4.6) |
| BDCD00252012R47MS1 | 0.47 | 20 | 2 | 39(29) | 6.2(7.8) | 3.7(4.4) |
| BDCD00252012R68MS1 | 0.68 | 20 | 2 | 46(40) | 5.5(6.5) | 3.3(3.7) |
| BDCD002520121R0MS1 | 1.0 | 20 | 2 | 59(45) | 4.0(5.0) | 3.0(3.5) |
| BDCD002520121R5MS1 | 1.5 | 20 | 2 | 70(62) | 3.4(4.0) | 2.5(2.7) |
| BDCD002520122R2MS1 | 2.2 | 20 | 2 | 115(102) | 3.3(3.8) | 2.0(2.3) |

Note: When ordering, please specify tolerance code. Tolerance: M=±20%

- Operating temperature range - 40°C ~ 125°C(Including self - temperature rise)
- Isat for Inductance drop 30% from its value without current
- I rms for a 40°C temperature rise from 25°C ambient with current
- Rated current : Isat or I rms, whichever is smaller
- Absolute maximum voltage 20VDC
- Measure Equipment :
 - L : Agilent E4991/HP4286A+16197A (or equivalent), 2MHz 0.2V
 - RDC : CHEN HWA502BC/HP4338B (or equivalent)
 - Isat : Agilent E4980A+HP42841A (or equivalent)
 - I rms : Agilent 6641 SYSTEM DC POWER SUPPLY (or equivalent)

Test Instruments : E4991A Impedance / Material Analyzer

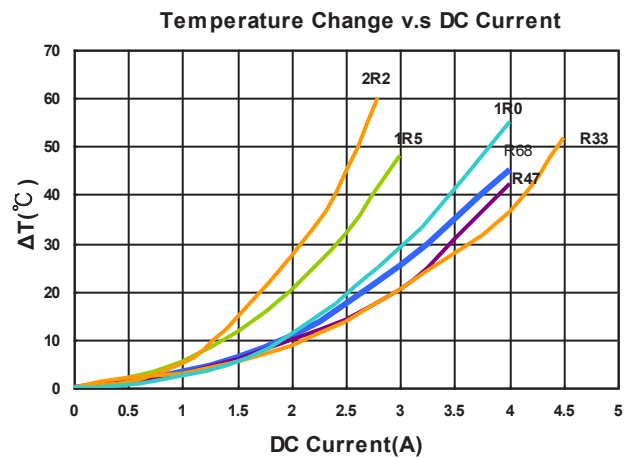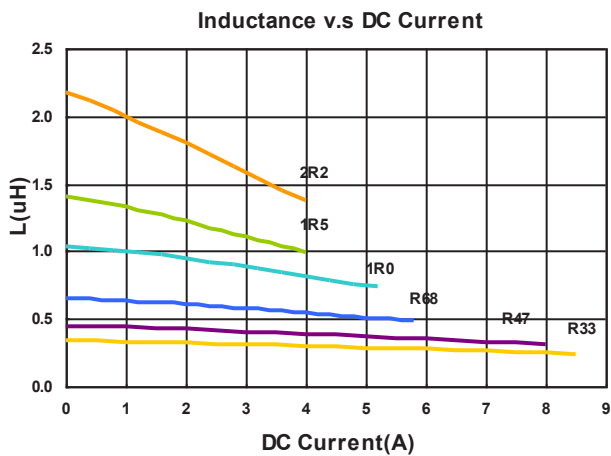



Electrical Characteristics

| Part Number | Inductance (uH) | Tolerance (±%) | Test Frequency (MHz) | RDC(mΩ) Max(Typ.) | Isat(A) Max(Typ.) | Irms(A) Max(Typ.) |
|--------------------|-----------------|----------------|----------------------|-------------------|-------------------|-------------------|
| BDCD00252012R47ML1 | 0.47 | 20 | 2 | 34(30) | 5.2(6.0) | 4.1(4.7) |
| BDCD002520121R0ML1 | 1.0 | 20 | 2 | 56(45) | 3.6(4.5) | 3.2(3.7) |
| BDCD002520122R2ML1 | 2.2 | 20 | 2 | 102(80) | 2.5(3.0) | 2.2(2.6) |

Note: When ordering, please specify tolerance code. Tolerance: M=±20%

- Operating temperature range - 40°C ~ 125°C(Including self - temperature rise)
- Isat for Inductance drop 30% from its value without current
- I rms for a 40°C temperature rise from 25°C ambient with current
- Rated current : Isat or I rms, whichever is smaller
- Absolute maximum voltage 20VDC
- Measure Equipment :
 L : Agilent E4991/HP4286A+16197A (or equivalent), 2MHz 0.2V
 RDC : CHEN HWA502BC/HP4338B (or equivalent)
 Isat : Agilent E4980A+HP42841A (or equivalent)
 I rms : Agilent 6641 SYSTEM DC POWER SUPPLY (or equivalent)

Test Instruments : E4991A Impedance / Material Analyzer

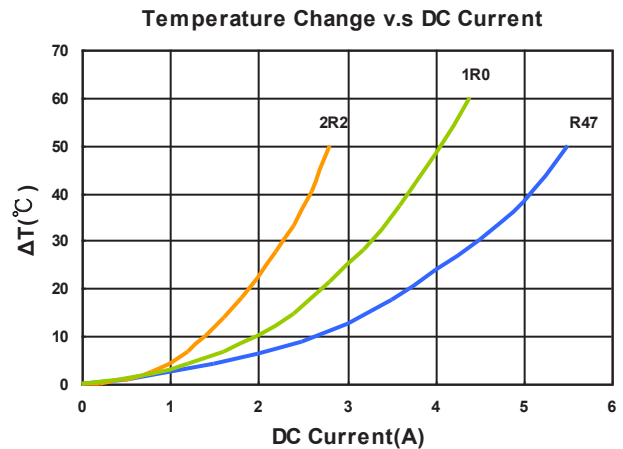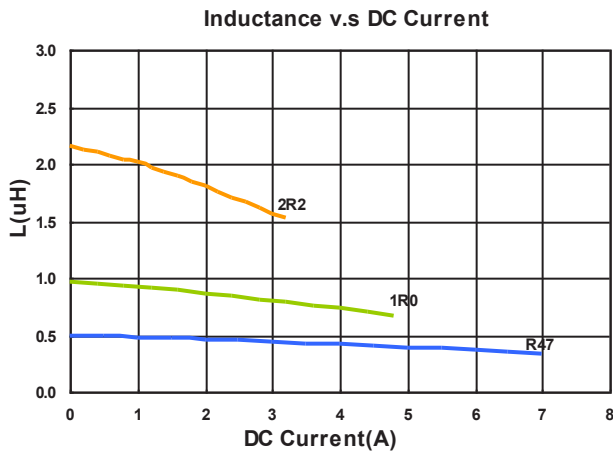



Electrical Characteristics

| Part Number | Inductance (uH) | Tolerance (±%) | Test Frequency (MHz) | RDC(mΩ) Max(Typ.) | Isat(A) Max(Typ.) | Irms(A) Max(Typ.) |
|--------------------|-----------------|----------------|----------------------|-------------------|-------------------|-------------------|
| BDCD00322510R47MS1 | 0.47 | 20 | 2 | 37(30) | 5.8(6.6) | 3.6(4.2) |
| BDCD003225101R0MS1 | 1.0 | 20 | 2 | 56(49) | 4.0(4.6) | 3.0(3.3) |
| BDCD003225101R5MS1 | 1.5 | 20 | 2 | 75(66) | 3.4(4.0) | 2.6(3.0) |
| BDCD003225102R2MS1 | 2.2 | 20 | 2 | 108(95) | 2.7(3.2) | 2.2(2.5) |

Note: When ordering, please specify tolerance code. Tolerance: M=±20%

- Operating temperature range - 40°C ~ 125°C(Including self - temperature rise)
- Isat for Inductance drop 30% from its value without current
- I rms for a 40°C temperature rise from 25°C ambient with current
- Rated current : Isat or I rms, whichever is smaller
- Absolute maximum voltage 20VDC
- Measure Equipment :
 - L : Agilent E4991/HP4286A+16197A (or equivalent), 2MHz 0.2V
 - RDC : CHEN HWA502BC/HP4338B (or equivalent)
 - Isat : Agilent E4980A+HP42841A (or equivalent)
 - I rms : Agilent 6641 SYSTEM DC POWER SUPPLY (or equivalent)

Test Instruments : E4991A Impedance / Material Analyzer

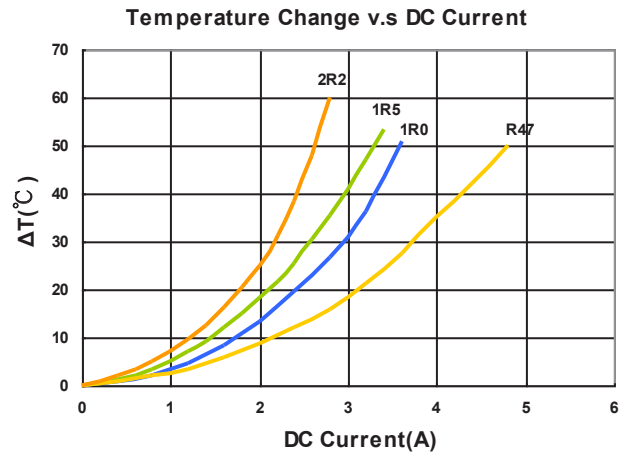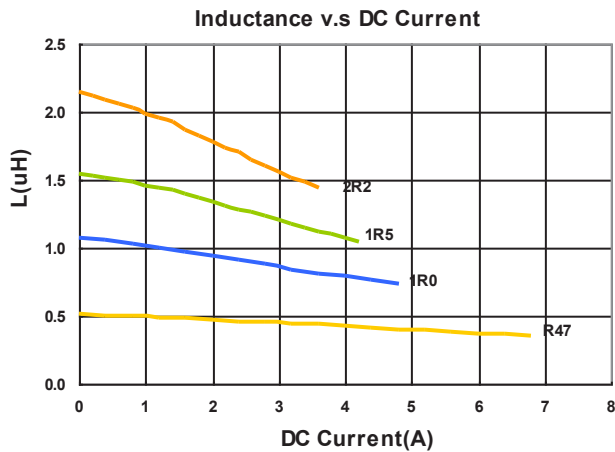



Electrical Characteristics

| Part Number | Inductance (uH) | Tolerance (±%) | Test Frequency (MHz) | RDC(mΩ) Max(Typ.) | Isat(A) Max(Typ.) | Irms(A) Max(Typ.) |
|--------------------|-----------------|----------------|----------------------|-------------------|-------------------|-------------------|
| BDCD00322512R47MS1 | 0.47 | 20 | 2 | 27(21) | 8.0(9.0) | 5.0(5.8) |
| BDCD00322512R68MS1 | 0.68 | 20 | 2 | 34(26) | 6.3(7.5) | 4.0(4.6) |
| BDCD003225121R0MS1 | 1.0 | 20 | 2 | 42(34) | 5.8(6.3) | 3.8(4.2) |
| BDCD003225121R5MS1 | 1.5 | 20 | 2 | 68(58) | 4.0(4.5) | 2.8(3.2) |
| BDCD003225122R2MS1 | 2.2 | 20 | 2 | 85(75) | 3.6(4.0) | 2.4(2.7) |

Note: When ordering, please specify tolerance code. Tolerance: M=±20%


- Operating temperature range - 40°C ~ 125°C(Including self - temperature rise)
- Isat for Inductance drop 30% from its value without current
- Iirms for a 40°C temperature rise from 25°C ambient with current
- Rated current : Isat or Iirms, whichever is smaller
- Absolute maximum voltage 20VDC
- Measure Equipment :
 - L : Agilent E4991/HP4286A+16197A (or equivalent), 2MHz 0.2V
 - RDC : CHEN HWA502BC/HP4338B (or equivalent)
 - Isat : Agilent E4980A+HP42841A (or equivalent)
 - Iirms : Agilent 6641 SYSTEM DC POWER SUPPLY (or equivalent)

Test Instruments : E4991A Impedance / Material Analyzer

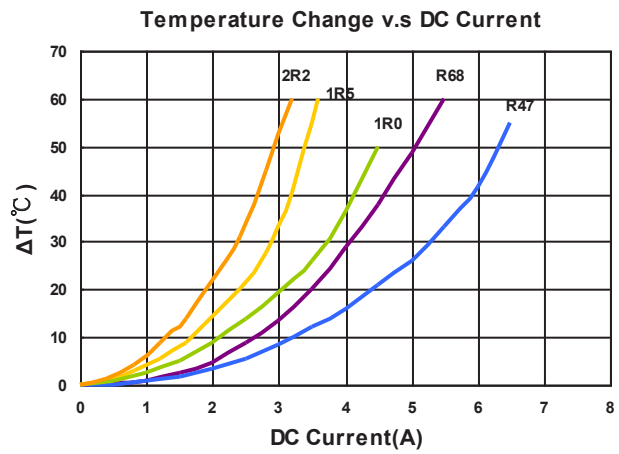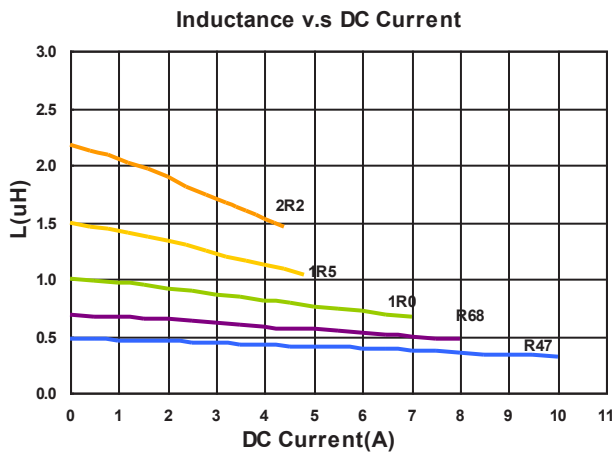


Packaging Specifications


Tape Dimensions

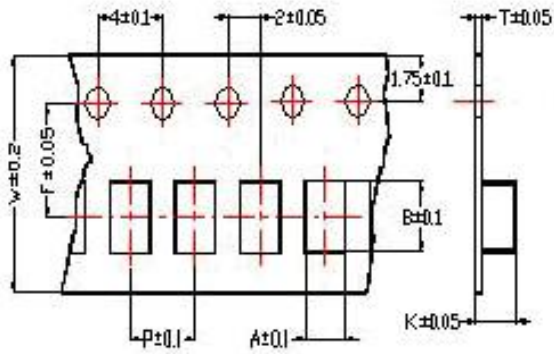

Tape Material

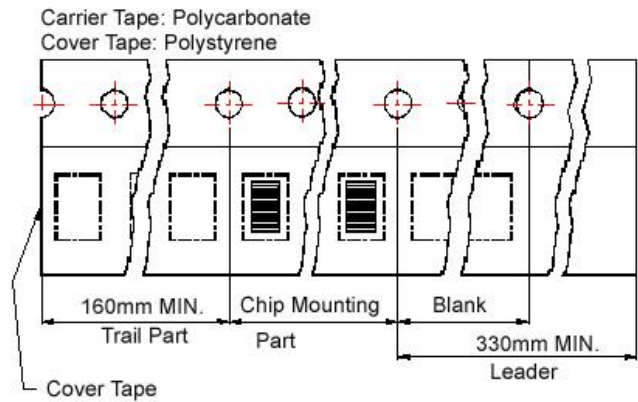

Reel Dimensions

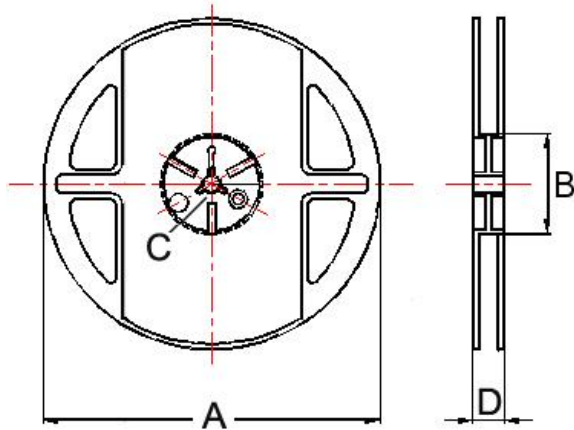

Dimensions in mm

| TYPE | Tape Dimensions | | | | | | | Reel Dimensions | | | | Quantity |
|--------------|-----------------|------|------|---|---|-----|------|-----------------|----|----|-----|------------|
| | A | B | T | W | P | F | K | A | B | C | D | PCS / REEL |
| BDCD00201610 | 1.90 | 2.30 | 0.22 | 8 | 4 | 3.5 | 1.15 | 178 | 60 | 12 | 1.5 | 3000 |
| BDCD00201612 | 1.90 | 2.30 | 0.22 | 8 | 4 | 3.5 | 1.15 | 178 | 60 | 12 | 1.5 | 3000 |
| BDCD00252010 | 2.25 | 2.80 | 0.22 | 8 | 4 | 3.5 | 1.15 | 178 | 60 | 12 | 1.5 | 3000 |
| BDCD00252012 | 2.30 | 2.80 | 0.22 | 8 | 4 | 3.5 | 1.35 | 178 | 60 | 12 | 1.5 | 3000 |
| BDCD00322510 | 2.80 | 3.55 | 0.23 | 8 | 4 | 3.5 | 1.20 | 178 | 60 | 12 | 1.5 | 3000 |
| BDCD00322512 | 2.80 | 3.50 | 0.23 | 8 | 4 | 3.5 | 1.34 | 178 | 60 | 12 | 1.5 | 3000 |

For More Information:

[Americas - prodinfo_power_americas@yageo.com](mailto:prodinfo_power_americas@yageo.com) | [Europe - prodinfo_power_emea@yageo.com](mailto:prodinfo_power_emea@yageo.com) | [Asia - prodinfo_power_asia@yageo.com](mailto:prodinfo_power_asia@yageo.com)

Performance warranty of products offered on this data sheet is limited to the parameters specified. Data is subject to change without notice. Other brand and product names mentioned herein may be trademarks or registered trademarks of their respective owners. © Copyright, 2022. Pulse Electronics, Inc. All rights reserved.

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

 [View BDCD002520101R0MS1 on WIN SOURCE](#)

 [Chilisin Information](#)

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management