



**THE DATASHEET OF  
LTC5548IUDB#TRPBF**



# 2GHz to 14GHz Microwave Mixer with Wideband DC–6GHz IF

## FEATURES

- Upconversion or Downconversion
- High IIP3: +24.4dBm at 5.8GHz  
+21.4dBm at 9GHz
- 7.1dB Conversion Loss at 5.8GHz
- +15.2dBm Input P1dB at 5.8GHz
- Integrated LO Buffer: 0dBm LO Drive
- Selectable Integrated LO Frequency Doubler
- Low LO-RF Leakage: <math>-30\text{dBm}</math>
- 50Ω Wideband Matched RF and LO Ports
- 3.3V/120mA Supply
- Fast Turn ON/OFF for TDD Operation
- 3mm × 2mm, 12-Lead QFN Package

## APPLICATIONS

- Microwave Transceivers
- Wireless Backhaul
- Point-to-Point Microwave
- Phased-Array Antennas
- C, X and Ku Band RADAR
- Test Equipment
- Satellite MODEMs

## DESCRIPTION


The LTC<sup>®</sup>5548 is a high performance, microwave double balanced passive mixer that can be used for frequency upconversion or downconversion. The device is similar to the LTC5549, but with a broadband, differential DC to 6GHz IF port. The LTC5548 is recommended for applications where the IF frequency range extends below 500MHz. For applications where the IF frequency is always above 500MHz, the LTC5549 is recommended, since it includes an integrated IF balun.

The LTC5548's mixer and integrated RF balun are optimized to cover the 2GHz to 14GHz RF frequency range. The device includes an integrated LO amplifier optimized for the 1GHz to 12GHz frequency range, requiring only 0dBm drive. The device also includes an integrated LO frequency doubler, which can be enabled or disabled with a CMOS-compatible control pin.


The LTC5548 delivers exceptionally high IIP3 and P1dB, in addition to very low LO to RF and LO to IF leakages. The part also offers high integration in a small package.

LT, LT, LTC, LTM, Linear Technology and the Linear logo are registered trademarks of Linear Technology Corporation. All other trademarks are the property of their respective owners.

## TYPICAL APPLICATION

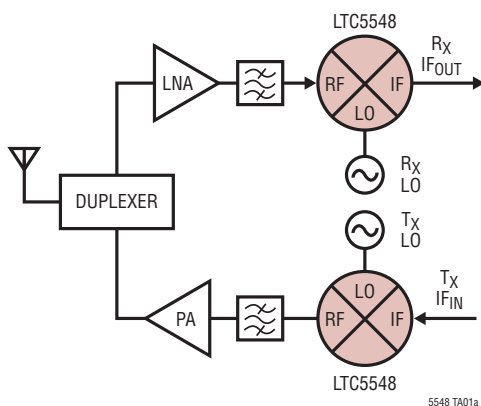

**Conversion Loss and IIP3  
(Low Side LO, IF = 240MHz)**

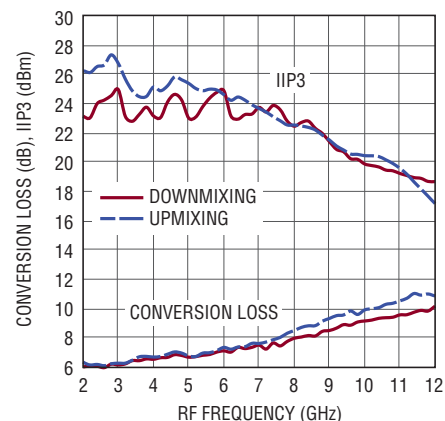


5548 TA01b

## ABSOLUTE MAXIMUM RATINGS

(Note 1)

|                                                           |                          |
|-----------------------------------------------------------|--------------------------|
| Supply Voltage ( $V_{CC}$ )                               | 4V                       |
| Enable Input Voltage (EN)                                 | -0.3V to $V_{CC} + 0.3V$ |
| X2 Input Voltage (X2)                                     | -0.3V to $V_{CC} + 0.3V$ |
| LO Input Power (1GHz to 12GHz)                            | +10dBm                   |
| LO Input DC Voltage                                       | $\pm 0.1V$               |
| RF Power (2GHz to 14GHz)                                  | +20dBm                   |
| RF DC Voltage                                             | $\pm 0.1V$               |
| IF <sup>+</sup> /IF <sup>-</sup> Input Power (LF to 6GHz) | +20dBm                   |
| IF <sup>+</sup> /IF <sup>-</sup> Input DC Voltage         | $\pm 0.3V$               |
| Operating Temperature Range ( $T_C$ )                     | -40°C to 105°C           |
| Storage Temperature Range                                 | -65°C to 150°C           |
| Junction Temperature ( $T_J$ )                            | 150°C                    |

## PIN CONFIGURATION

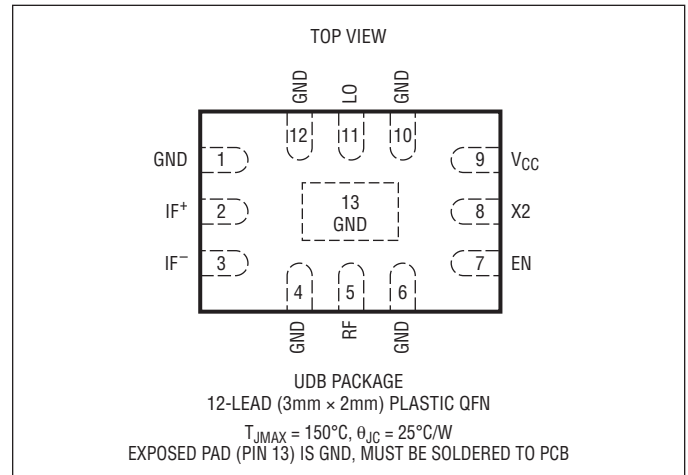

## ORDER INFORMATION

(<http://www.linear.com/product/LTC5548#orderinfo>)

Lead Free Finish

| TAPE AND REEL (MINI) | TAPE AND REEL     | PART MARKING | PACKAGE DESCRIPTION             | TEMPERATURE RANGE |
|----------------------|-------------------|--------------|---------------------------------|-------------------|
| LTC5548IUDB#TRMPBF   | LTC5548IUDB#TRPBF | LGXF         | 12-Lead (3mm x 2mm) Plastic QFN | -40°C to 105°C    |

TRM = 500 pieces.

Consult LTC Marketing for parts specified with wider operating temperature ranges.

For more information on lead free part marking, go to: <http://www.linear.com/leadfree/>

For more information on tape and reel specifications, go to: <http://www.linear.com/tapeandreel/>. Some packages are available in 500 unit reels through designated sales channels with #TRMPBF suffix.

**DC ELECTRICAL CHARACTERISTICS** The ● denotes the specifications which apply over the full operating temperature range, otherwise specifications are at  $T_C = 25^\circ\text{C}$ .  $V_{CC} = 3.3V$ , EN = High, unless otherwise noted. Test circuit shown in Figure 1. (Note 2)

| PARAMETER                                                     | CONDITIONS                                             | MIN   | TYP        | MAX        | UNITS         |
|---------------------------------------------------------------|--------------------------------------------------------|-------|------------|------------|---------------|
| <b>Power Supply Requirements</b>                              |                                                        |       |            |            |               |
| Supply Voltage ( $V_{CC}$ )                                   |                                                        | ● 3.0 | 3.3        | 3.6        | V             |
| Supply Current Enabled                                        | X2 = Low (LO Doubler Off)<br>X2 = High (LO Doubler On) |       | 120<br>136 | 140<br>160 | mA<br>mA      |
| Shutdown Current                                              | EN = Low                                               |       |            | 100        | $\mu\text{A}$ |
| <b>Enable (EN) and LO Frequency Doubler (X2) Logic Inputs</b> |                                                        |       |            |            |               |
| Input High Voltage (On)                                       |                                                        | ● 1.2 |            |            | V             |
| Input Low Voltage (Off)                                       |                                                        | ●     |            | 0.3        | V             |
| Input Current                                                 | -0.3V to $V_{CC} + 0.3V$                               | -30   |            | 100        | $\mu\text{A}$ |
| Chip Turn-On Time                                             |                                                        |       | 0.2        |            | $\mu\text{s}$ |
| Chip Turn-Off Time                                            |                                                        |       | 0.1        |            | $\mu\text{s}$ |

**AC ELECTRICAL CHARACTERISTICS** The ● denotes the specifications which apply over the full operating temperature range, otherwise specifications are at  $T_C = 25^\circ\text{C}$ .  $V_{CC} = 3.3\text{V}$ , EN = High,  $P_{LO} = 0\text{dBm}$ ,  $P_{RF} = -5\text{dBm}$  ( $-5\text{dBm}/\text{tone}$  for two-tone IIP3 tests), unless otherwise noted. Test circuit shown in Figure 1. (Notes 2, 3)

| PARAMETER            | CONDITIONS                         | MIN | TYP        | MAX | UNITS |
|----------------------|------------------------------------|-----|------------|-----|-------|
| LO Frequency Range   | ●                                  |     | 1 to 12    |     | GHz   |
| RF Frequency Range   | ●                                  |     | 2 to 14    |     | GHz   |
| IF Frequency Range   | ●                                  |     | DC to 6000 |     | MHz   |
| RF Return Loss       | $Z_0 = 50\Omega$ , 2GHz to 13.6GHz |     | >9         |     | dB    |
| LO Input Return Loss | $Z_0 = 50\Omega$ , 1GHz to 12GHz   |     | >10        |     | dB    |
| LO Input Power       | X2 = Low                           | -6  | 0          | 6   | dBm   |
|                      | X2 = High                          | -6  | 0          | 3   | dBm   |

**Downmixer Application with LO Doubler Off (X2 = Low), IF = 240MHz, Low Side LO**

|                                                                    |                                                                      |   |       |  |                      |
|--------------------------------------------------------------------|----------------------------------------------------------------------|---|-------|--|----------------------|
| Conversion Loss                                                    | RF Input = 2GHz                                                      |   | 6.0   |  | dB                   |
|                                                                    | RF Input = 5.8GHz                                                    |   | 7.1   |  | dB                   |
|                                                                    | RF Input = 9GHz                                                      |   | 8.5   |  | dB                   |
|                                                                    | RF Input = 12GHz                                                     |   | 10.2  |  | dB                   |
| Conversion Loss vs Temperature                                     | $T_C = -40^\circ\text{C}$ to $105^\circ\text{C}$ , RF Input = 5.8GHz | ● | 0.006 |  | dB/ $^\circ\text{C}$ |
| 2-Tone Input 3rd Order Intercept ( $\Delta f_{RF} = 2\text{MHz}$ ) | RF Input = 2GHz                                                      |   | 23.1  |  | dBm                  |
|                                                                    | RF Input = 5.8GHz                                                    |   | 24.4  |  | dBm                  |
|                                                                    | RF Input = 9GHz                                                      |   | 21.4  |  | dBm                  |
|                                                                    | RF Input = 12GHz                                                     |   | 18.7  |  | dBm                  |
| SSB Noise Figure                                                   | RF Input = 2GHz                                                      |   | 6.2   |  | dB                   |
|                                                                    | RF Input = 5.8GHz                                                    |   | 8.0   |  | dB                   |
|                                                                    | RF Input = 8.5GHz                                                    |   | 9.6   |  | dB                   |
| LO to RF Leakage                                                   | $f_{LO} = 1\text{GHz}$ to 12GHz                                      |   | <-25  |  | dBm                  |
| LO to IF Leakage                                                   | $f_{LO} = 1\text{GHz}$ to 12GHz                                      |   | <-26  |  | dBm                  |
| RF to LO Isolation                                                 | $f_{RF} = 2\text{GHz}$ to 14GHz                                      |   | >40   |  | dB                   |
| RF Input to IF Output Isolation                                    | $f_{RF} = 2\text{GHz}$ to 14GHz                                      |   | >35   |  | dB                   |
| Input 1dB Compression                                              | RF Input = 5.8GHz                                                    |   | 15.2  |  | dBm                  |

**Downmixer Application with LO Doubler On (X2 = High), IF = 240MHz, Low Side LO**

|                                                                    |                                                                      |   |            |  |                      |
|--------------------------------------------------------------------|----------------------------------------------------------------------|---|------------|--|----------------------|
| Conversion Loss                                                    | RF Input = 5.8GHz                                                    |   | 7.3        |  | dB                   |
|                                                                    | RF Input = 9GHz                                                      |   | 9.2        |  | dB                   |
|                                                                    | RF Input = 12GHz                                                     |   | 11.8       |  | dB                   |
| Conversion Loss vs. Temperature                                    | $T_C = -40^\circ\text{C}$ to $105^\circ\text{C}$ , RF Input = 5.8GHz | ● | 0.006      |  | dB/ $^\circ\text{C}$ |
| 2-Tone Input 3rd Order Intercept ( $\Delta f_{RF} = 2\text{MHz}$ ) | RF Input = 5.8GHz                                                    |   | 23.9       |  | dBm                  |
|                                                                    | RF Input = 9GHz                                                      |   | 20.9       |  | dBm                  |
|                                                                    | RF Input = 12GHz                                                     |   | 18.3       |  | dBm                  |
| SSB Noise Figure                                                   | RF Input = 5.8GHz                                                    |   | 8.9        |  | dB                   |
|                                                                    | RF Input = 8.5GHz                                                    |   | 10.8       |  | dB                   |
| LO to RF Input Leakage                                             | $f_{LO} = 1\text{GHz}$ to 5GHz                                       |   | <-30       |  | dBm                  |
| 2LO to RF Input Leakage                                            | $f_{LO} = 1\text{GHz}$ to 5GHz                                       |   | $\leq$ -25 |  | dBm                  |
| LO to IF Output Leakage                                            | $f_{LO} = 1\text{GHz}$ to 5GHz                                       |   | <-36       |  | dBm                  |
| 2LO to IF Output Leakage                                           | $f_{LO} = 1\text{GHz}$ to 5GHz                                       |   | <-20       |  | dBm                  |
| Input 1dB Compression                                              | $f_{RF} = 5.8\text{GHz}$                                             |   | 14.8       |  | dBm                  |

## AC ELECTRICAL CHARACTERISTICS

The ● denotes the specifications which apply over the full operating temperature range, otherwise specifications are at  $T_C = 25^\circ\text{C}$ .  $V_{CC} = 3.3\text{V}$ ,  $EN = \text{High}$ ,  $P_{LO} = 0\text{dBm}$ ,  $P_{IF} = -5\text{dBm}$  ( $-5\text{dBm/tone}$  for two-tone IIP3 tests), unless otherwise noted. Test circuit shown in Figure 1. (Notes 2, 3)



| PARAMETER                                                                           | CONDITIONS                                                            | MIN | TYP   | MAX | UNITS                |
|-------------------------------------------------------------------------------------|-----------------------------------------------------------------------|-----|-------|-----|----------------------|
| <b>Upmixer Application with LO Doubler Off (X2 = Low), IF = 240MHz, Low Side LO</b> |                                                                       |     |       |     |                      |
| Conversion Loss                                                                     | RF Output = 2GHz                                                      |     | 6.3   |     | dB                   |
|                                                                                     | RF Output = 5.8GHz                                                    |     | 7.1   |     | dB                   |
|                                                                                     | RF Output = 9GHz                                                      |     | 9.3   |     | dB                   |
|                                                                                     | RF Output = 12GHz                                                     |     | 10.9  |     | dB                   |
| Conversion Loss vs Temperature                                                      | $T_C = -40^\circ\text{C}$ to $105^\circ\text{C}$ , RF Output = 5.8GHz |     | 0.006 |     | dB/ $^\circ\text{C}$ |
| Input 3rd Order Intercept ( $\Delta f_{IF} = 2\text{MHz}$ )                         | RF Output = 2GHz                                                      |     | 26.3  |     | dBm                  |
|                                                                                     | RF Output = 5.8GHz                                                    |     | 24.9  |     | dBm                  |
|                                                                                     | RF Output = 9GHz                                                      |     | 21.5  |     | dBm                  |
|                                                                                     | RF Output = 12GHz                                                     |     | 17.2  |     | dBm                  |
| SSB Noise Figure                                                                    | RF Output = 2GHz                                                      |     | 7.8   |     | dB                   |
|                                                                                     | RF Output = 5.8GHz                                                    |     | 8.7   |     | dB                   |
|                                                                                     | RF Output = 8.5GHz                                                    |     | 10.4  |     | dB                   |
| LO to RF Output Leakage                                                             | $f_{LO} = 1\text{GHz}$ to $12\text{GHz}$                              |     | <-25  |     | dBm                  |
| LO to IF Input Leakage                                                              | $f_{LO} = 1\text{GHz}$ to $12\text{GHz}$                              |     | <-26  |     | dBm                  |
| IF to LO Isolation                                                                  | $f_{IF} = 500\text{MHz}$ to $6\text{GHz}$                             |     | >50   |     | dB                   |
| IF to RF Isolation                                                                  | $f_{IF} = 500\text{MHz}$ to $6\text{GHz}$                             |     | >40   |     | dB                   |
| Input 1dB Compression                                                               | RF Output = 5.8GHz                                                    |     | 15.7  |     | dBm                  |
| <b>Upmixer Application with LO Doubler On (X2 = High), IF = 240MHz, Low Side LO</b> |                                                                       |     |       |     |                      |
| Conversion Loss                                                                     | RF Output = 5.8GHz                                                    |     | 7.4   |     | dB                   |
|                                                                                     | RF Output = 9GHz                                                      |     | 9.6   |     | dB                   |
|                                                                                     | RF Output = 12GHz                                                     |     | 12.1  |     | dB                   |
| Conversion Loss vs Temperature                                                      | $T_C = -40^\circ\text{C}$ to $105^\circ\text{C}$ , RF Output = 5.8GHz |     | 0.006 |     | dB/ $^\circ\text{C}$ |
| 2-Tone Input 3rd Order Intercept ( $\Delta f_{IF} = 2\text{MHz}$ )                  | RF Output = 5.8GHz                                                    |     | 24.9  |     | dBm                  |
|                                                                                     | RF Output = 9GHz                                                      |     | 21.3  |     | dBm                  |
|                                                                                     | RF Output = 12GHz                                                     |     | 16.8  |     | dBm                  |
| SSB Noise Figure                                                                    | RF Output = 5.8GHz                                                    |     | 10.4  |     | dB                   |
|                                                                                     | RF Output = 9GHz                                                      |     | 12.4  |     | dB                   |
| LO to RF Output Leakage                                                             | $f_{LO} = 1\text{GHz}$ to $5\text{GHz}$                               |     | <-30  |     | dBm                  |
| 2LO to RF Output Leakage                                                            | $f_{LO} = 1\text{GHz}$ to $5\text{GHz}$                               |     | <-25  |     | dBm                  |
| LO to IF Input Leakage                                                              | $f_{LO} = 1\text{GHz}$ to $5\text{GHz}$                               |     | <-36  |     | dBm                  |
| 2LO to IF Input Leakage                                                             | $f_{LO} = 1\text{GHz}$ to $5\text{GHz}$                               |     | <-20  |     | dBm                  |
| Input 1dB Compression                                                               | RF Output = 5.8GHz                                                    |     | 14.8  |     | dBm                  |

**Note 1:** Stresses beyond those listed under Absolute Maximum Ratings may cause permanent damage to the device. Exposure to any Absolute Maximum Rating condition for extended periods may affect device reliability and lifetime.







**Note 2:** The LTC5548 is guaranteed functional over the  $-40^\circ\text{C}$  to  $105^\circ\text{C}$  case temperature range ( $\theta_{JC} = 25^\circ\text{C/W}$ ).

**Note 3:** SSB noise figure measurements performed with a small-signal noise source, bandpass filter and 2dB matching pad on input, with bandpass filters on LO, and output.


**TYPICAL PERFORMANCE CHARACTERISTICS** EN = high, test circuit shown in Figure 1.

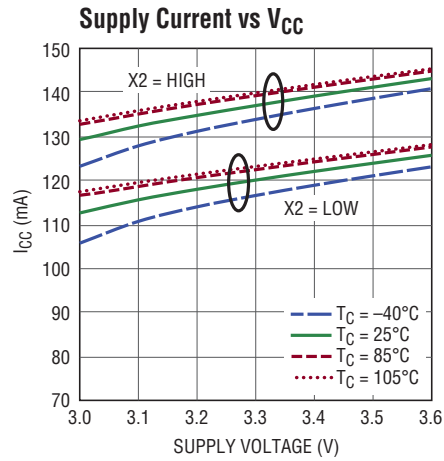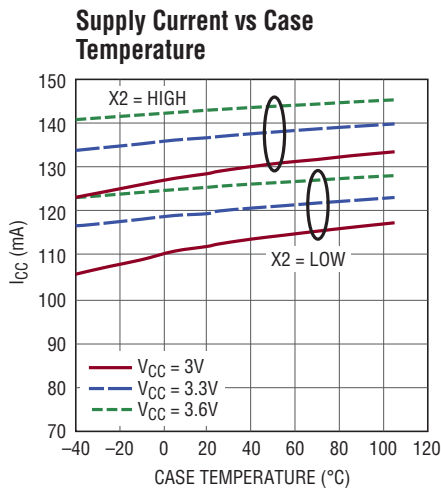


**TYPICAL PERFORMANCE CHARACTERISTICS** 2GHz to 12GHz downmixer application.  
 $V_{CC} = 3.3V$ , EN = high, X2 = low,  $T_C = 25^\circ C$ ,  $P_{LO} = 0dBm$ ,  $P_{RF} = -5dBm$  (-5dBm/tone for two-tone IIP3 tests,  $\Delta f = 2MHz$ ), IF = 240MHz, unless otherwise noted. Test circuit shown in Figure 1.

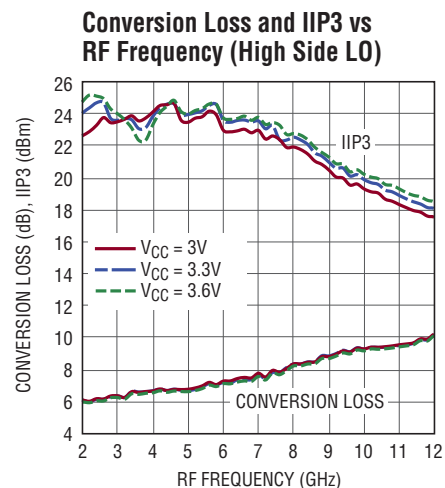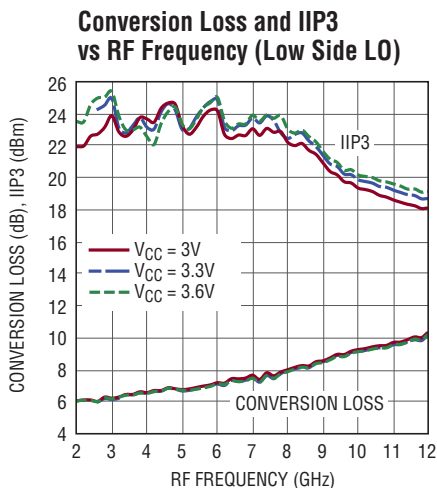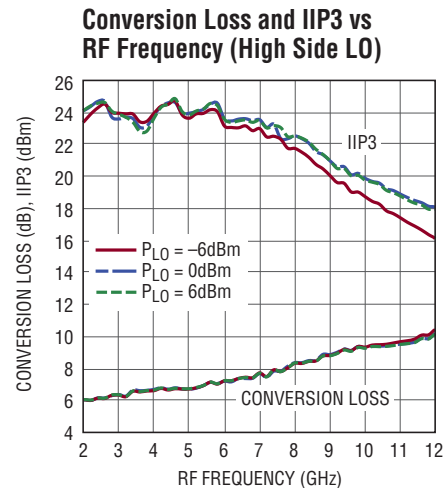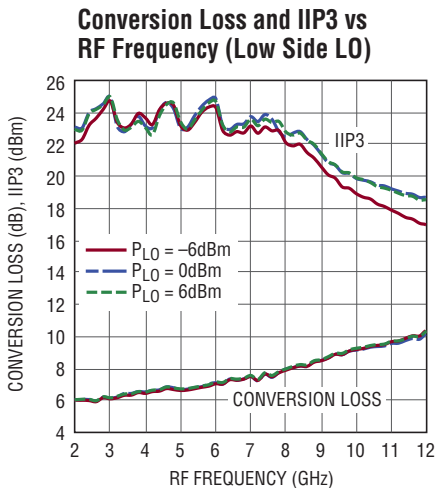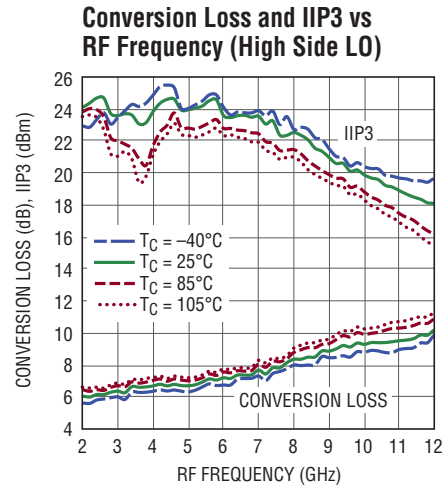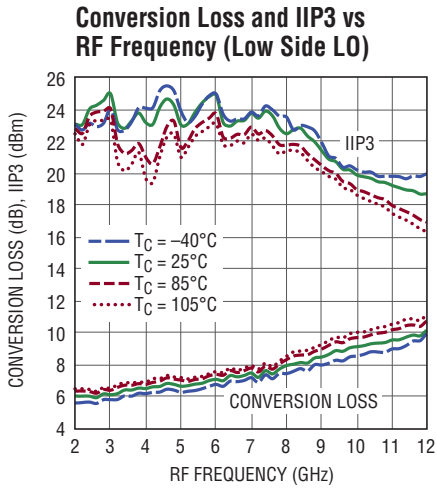


**TYPICAL PERFORMANCE CHARACTERISTICS** 2GHz to 12GHz downmixer application.  
 $V_{CC} = 3.3V$ , EN = high, X2 = low,  $T_C = 25^\circ C$ ,  $P_{LO} = 0dBm$ ,  $P_{RF} = -5dBm$  (-5dBm/tone for two-tone IIP3 tests,  $\Delta f = 2MHz$ ), IF = 240MHz, unless otherwise noted. Test circuit shown in Figure 1.

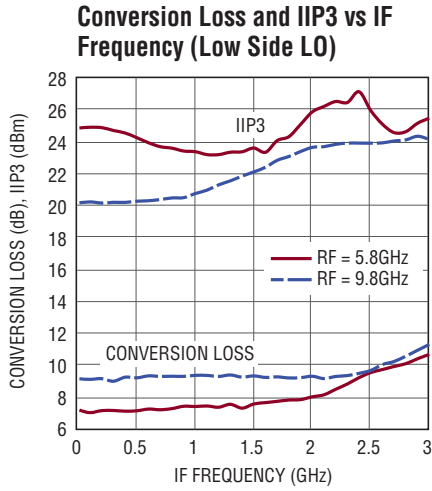


5548 G09

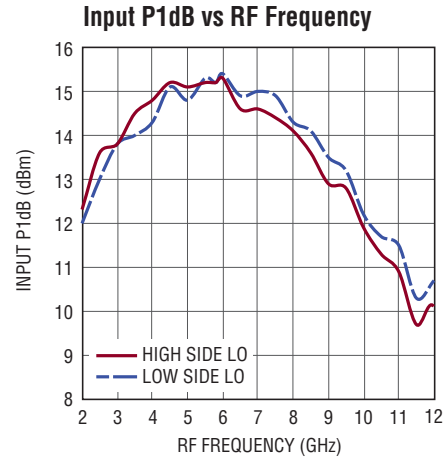


5548 G10

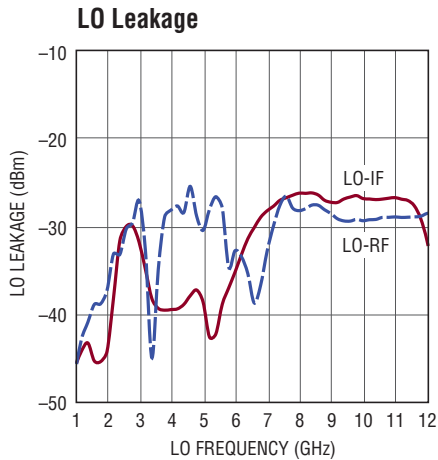


5548 G11

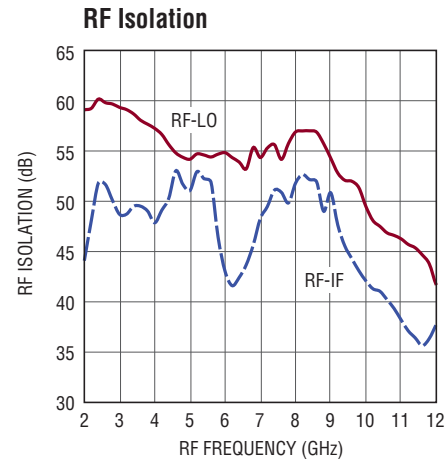

5548 G12

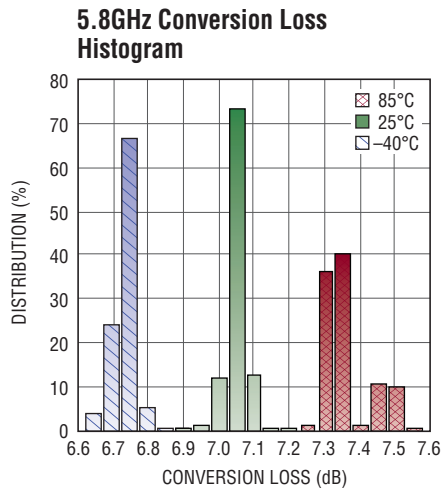

5548 G13

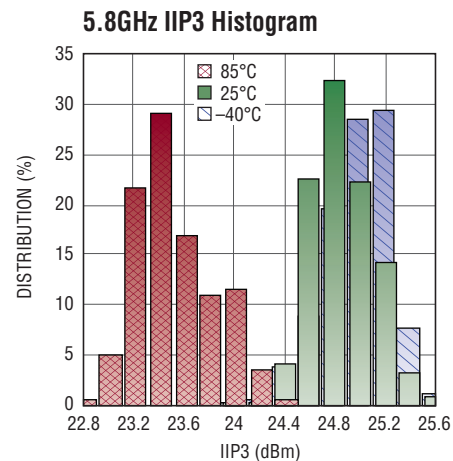


5548 G14

## TYPICAL PERFORMANCE CHARACTERISTICS


2GHz to 12GHz downmixer application with LO frequency doubler enabled.  $V_{CC} = 3.3V$ , EN = high, X2 = high,  $T_C = 25^\circ C$ ,  $P_{LO} = 0dBm$ ,  $P_{RF} = -5dBm$  (-5dBm/tone for two-tone IIP3 tests,  $\Delta f = 2MHz$ ), IF = 240MHz, unless otherwise noted. Test circuit shown in Figure 1.

**Conversion Loss and IIP3 vs RF Frequency (Low Side LO)**

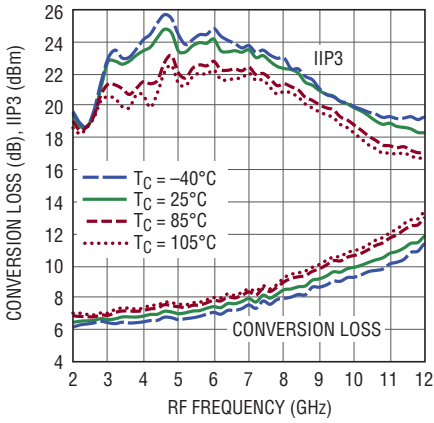


5548 G15

**Conversion Loss and IIP3 vs RF Frequency (Low Side LO)**

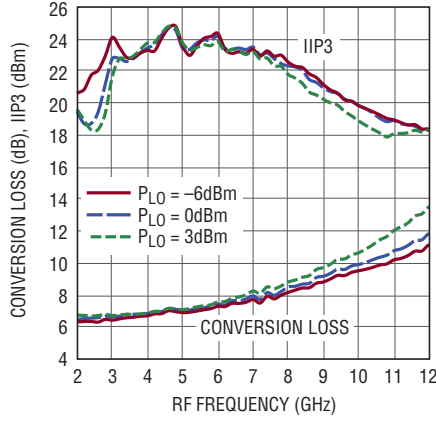


5548 G14

**Conversion Loss and IIP3 vs RF Frequency (Low Side LO)**

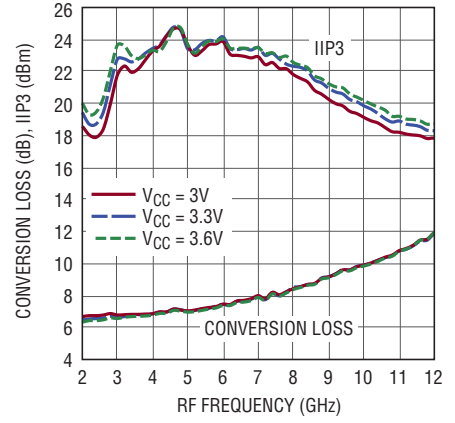


5548 G15

**Conversion Loss and IIP3 vs RF Frequency (High Side LO)**

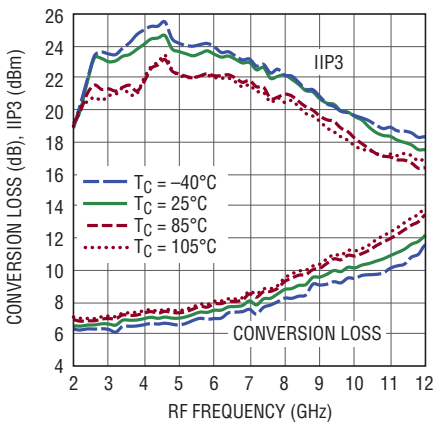


5548 G16

**Conversion Loss and IIP3 vs RF Frequency (High Side LO)**

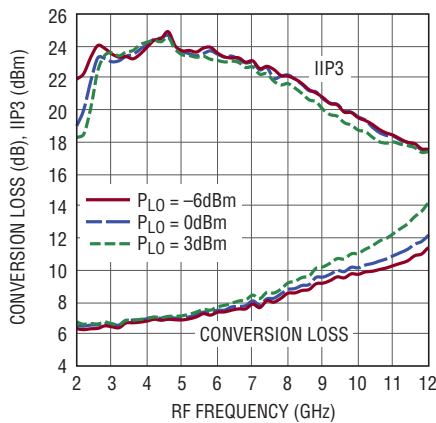


5548 G17

**Conversion Loss and IIP3 vs RF Frequency (High Side LO)**

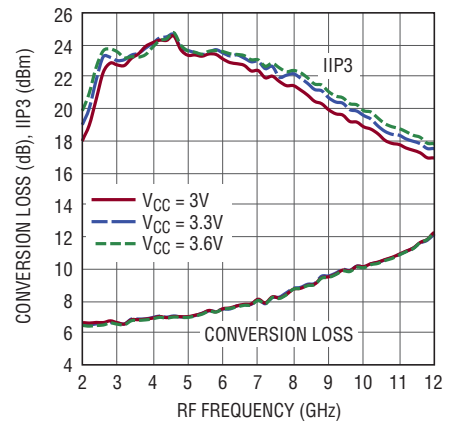


5548 G18

**Conversion Loss and IIP3 vs IF Frequency (Low Side LO)**

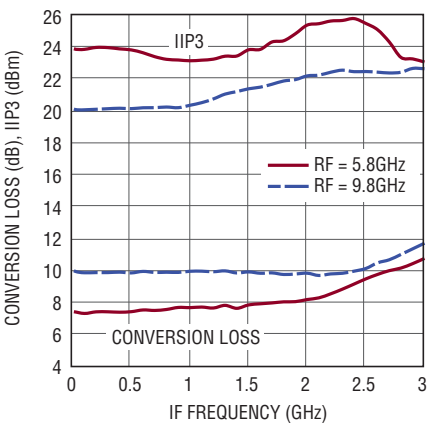


5548 G19

**Input P1dB vs RF Frequency**

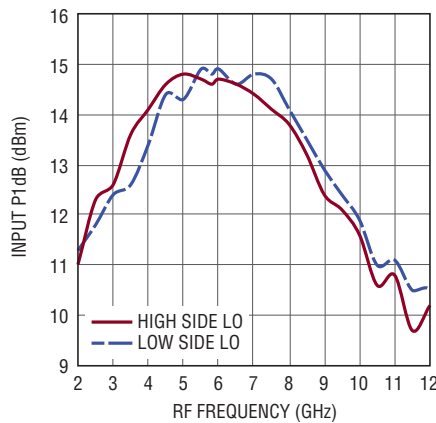

5548 G20


**LO and 2LO Leakage to IF**

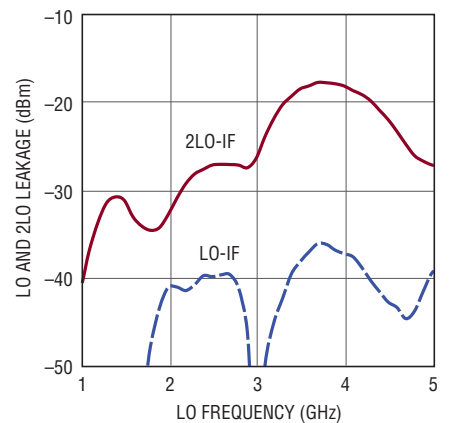

5548 G21


**TYPICAL PERFORMANCE CHARACTERISTICS** 2GHz to 12GHz upmixer application.  
 $V_{CC} = 3.3V$ , EN = high, X2 = low,  $T_C = 25^\circ C$ ,  $P_{LO} = 0dBm$ ,  $P_{IF} = -5dBm$  (-5dBm/tone for two-tone IIP3 tests,  $\Delta f = 2MHz$ ), IF = 240MHz, unless otherwise noted. Test circuit shown in Figure 1.

**Conversion Loss and IIP3 vs RF Frequency (Low Side LO)**

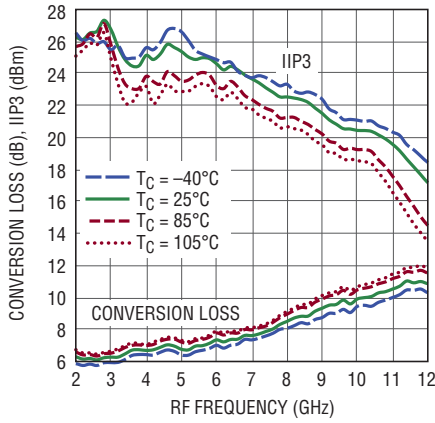


5548 G22

**Conversion Loss and IIP3 vs RF Frequency (Low Side LO)**

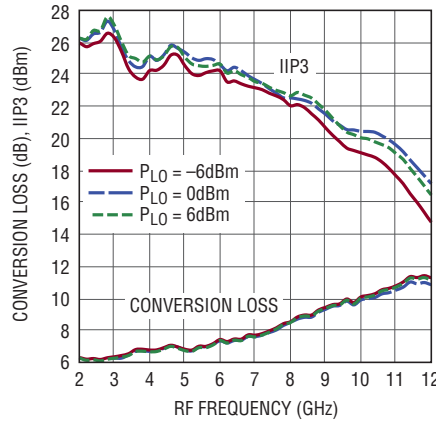


5548 G23

**Conversion Loss and IIP3 vs RF Frequency (Low Side LO)**

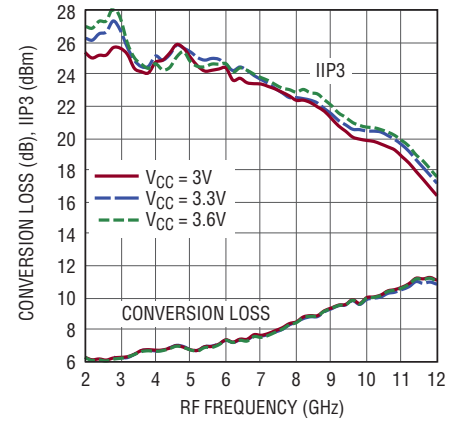


5548 G24

**Conversion Loss and IIP3 vs RF Frequency (High Side LO)**

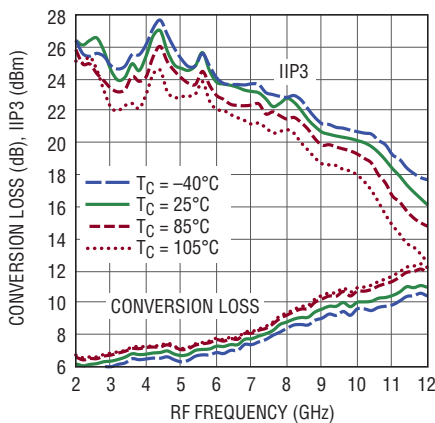


5548 G25

**Conversion Loss and IIP3 vs RF Frequency (High Side LO)**

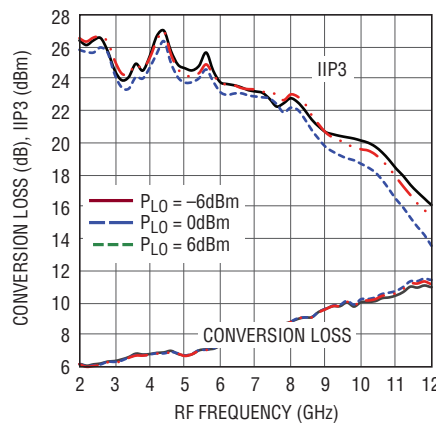


5548 G26

**Conversion Loss and IIP3 vs RF Frequency (High Side LO)**

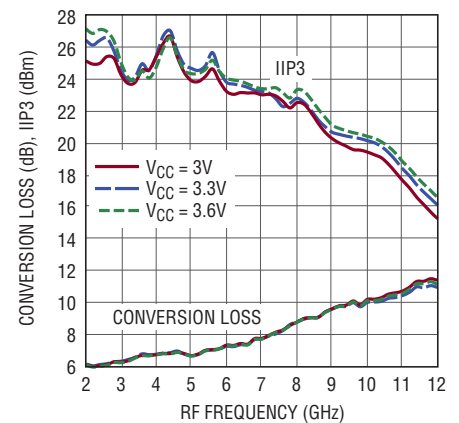


5548 G27

**Conversion Loss and IIP3 vs IF Frequency (Low Side LO)**

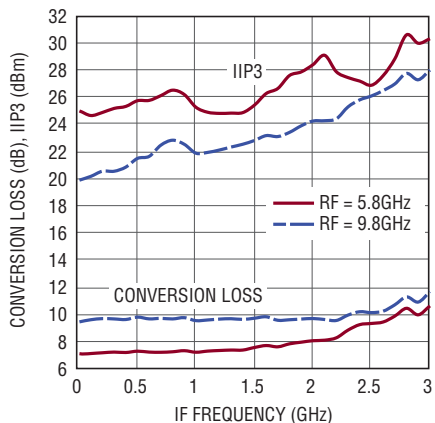


5548 G28

**Input P1dB vs IF Frequency**

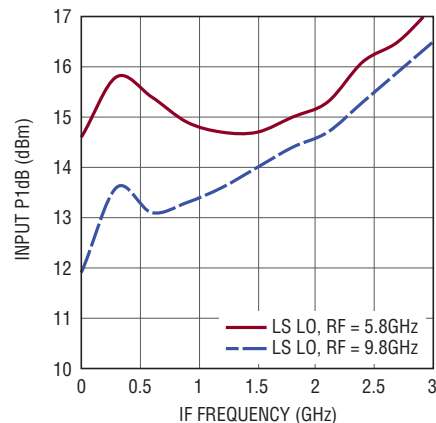

5548 G29

**IF Isolation**

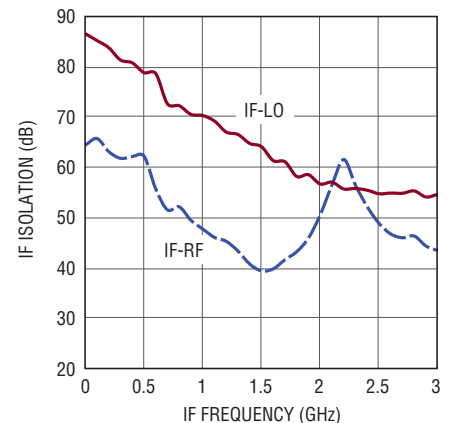


5548 G30

## TYPICAL PERFORMANCE CHARACTERISTICS


2GHz to 12GHz upmixer application with LO frequency doubler enabled.  $V_{CC} = 3.3V$ , EN = high, X2 = high,  $T_C = 25^\circ C$ ,  $P_{LO} = 0dBm$ ,  $P_{IF} = -5dBm$  (-5dBm/tone for two-tone IIP3 tests,  $\Delta f = 2MHz$ ), output measured at 5.8GHz, unless otherwise noted. Test circuit shown in Figure 1.

**Conversion Loss and IIP3 vs RF Frequency (Low Side LO)**

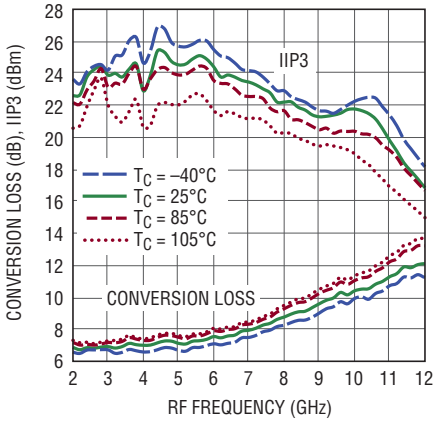


5548 G31

**Conversion Loss and IIP3 vs RF Frequency (Low Side LO)**

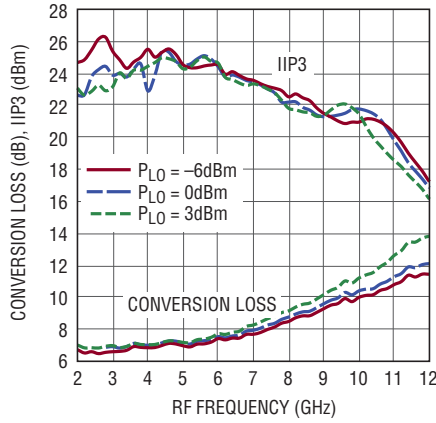


5548 G32

**Conversion Loss and IIP3 vs RF Frequency (Low Side LO)**

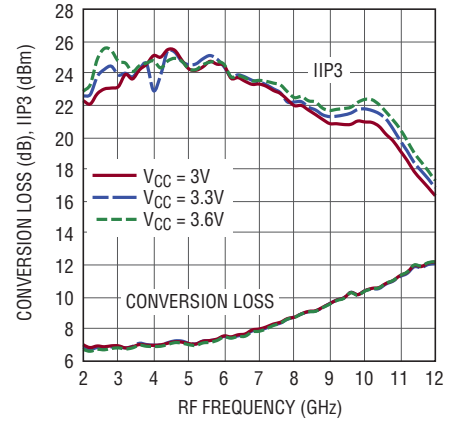


5548 G33

**Conversion Loss and IIP3 vs RF Frequency (High Side LO)**

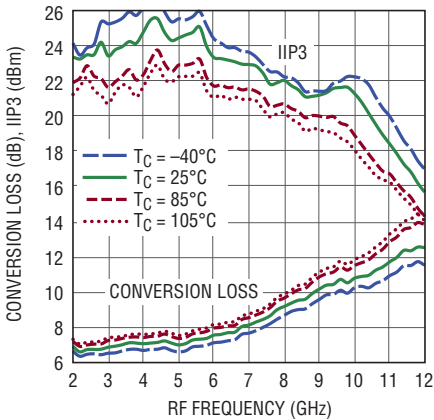


5548 G34

**Conversion Loss and IIP3 vs RF Frequency (High Side LO)**

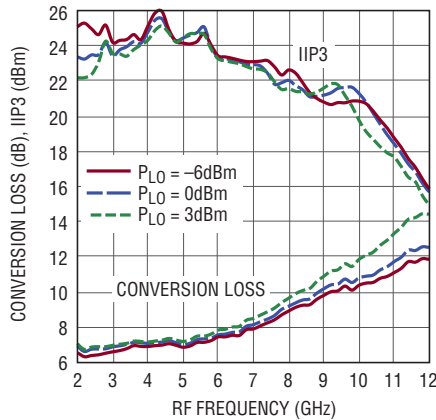


5548 G35

**Conversion Loss and IIP3 vs RF Frequency (High Side LO)**

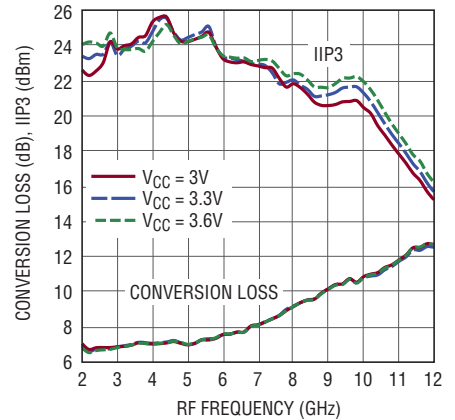


5548 G33

**Conversion Loss and IIP3 vs IF Frequency (Low Side LO)**

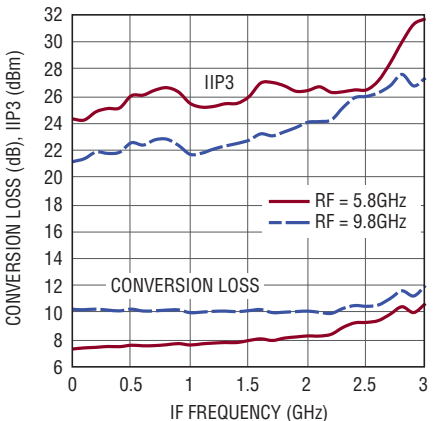


5548 G37

**Input P1dB vs IF Frequency**

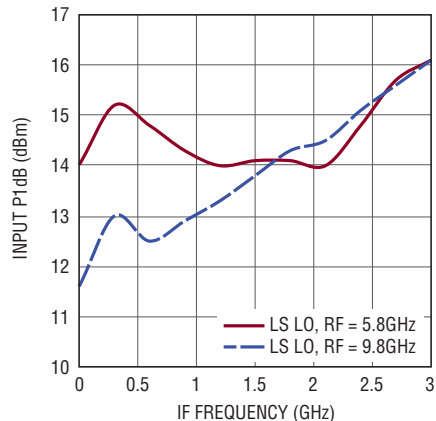

5548 G38

**LO and 2LO Leakage to RF**

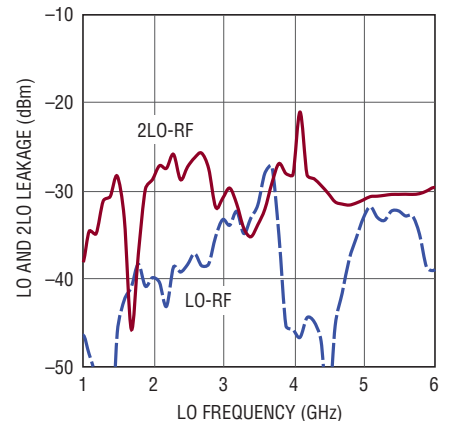

5548 G39

## PIN FUNCTIONS

**GND (Pins 1, 4, 6, 10, 12, Exposed Pad Pin 13):** Ground. These pins must be soldered to the RF ground on the circuit board. The exposed pad metal of the package provides both electrical contact to ground and good thermal contact to the printed circuit board.

**IF<sup>+</sup>, IF<sup>-</sup> (Pins 2, 3):** Differential Terminals for the IF. These pins may be used for a differential IF or connected to an external balun if a single-ended IF port is needed. The IF port can be used from DC up to 6GHz depending on the external balun bandwidth.

**RF (Pin 5):** Single-Ended Terminal for the RF Port. This pin is internally connected to the primary side of the RF transformer, which has low DC resistance to ground. A series DC blocking capacitor must be used to avoid damage to the integrated transformer if DC voltage is present. The RF port is impedance matched from 2GHz to 14GHz as long as the LO is driven with a 0 ±6dBm source between 1GHz and 12GHz.


**EN (Pin 7):** Enable Pin. When the voltage applied to this pin is greater than 1.2V, the mixer is enabled. When the voltage is less than 0.3V, the mixer is disabled. Typical input current is less than 30µA. This pin has an internal 376kΩ pull-down resistor.

**X2 (Pin 8):** Digital Control Pin for LO Frequency Doubler. When the voltage applied to this pin is greater than 1.2V, the LO frequency doubler is enabled. When the voltage DC is less than 0.3V, the LO frequency doubler is disabled. Typical input current is less than 30µA. This pin has an internal 376kΩ pull-down resistor.


**V<sub>CC</sub> (Pin 9):** Power Supply Pin. This pin must be externally connected to a regulated 3.3V supply, with a bypass capacitor located close to the pin. Typical current consumption is 120mA when the part is enabled.

**LO (Pin 11):** Input for the Local Oscillator (LO). A series DC blocking capacitor must be used. Typical DC voltage at this pin is 1.6V.

## BLOCK DIAGRAM

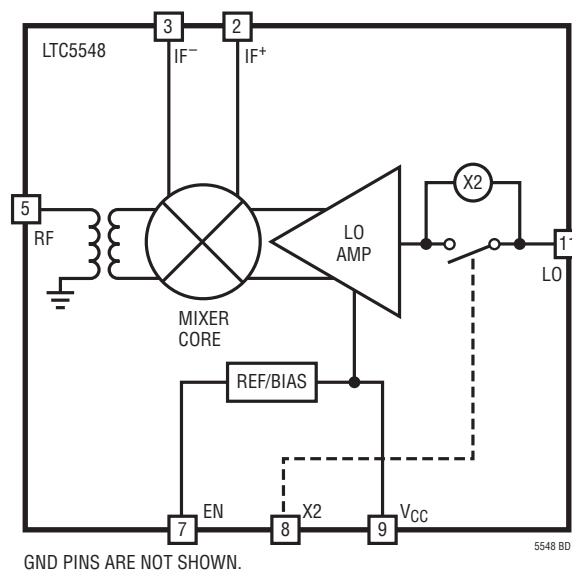

## TEST CIRCUIT

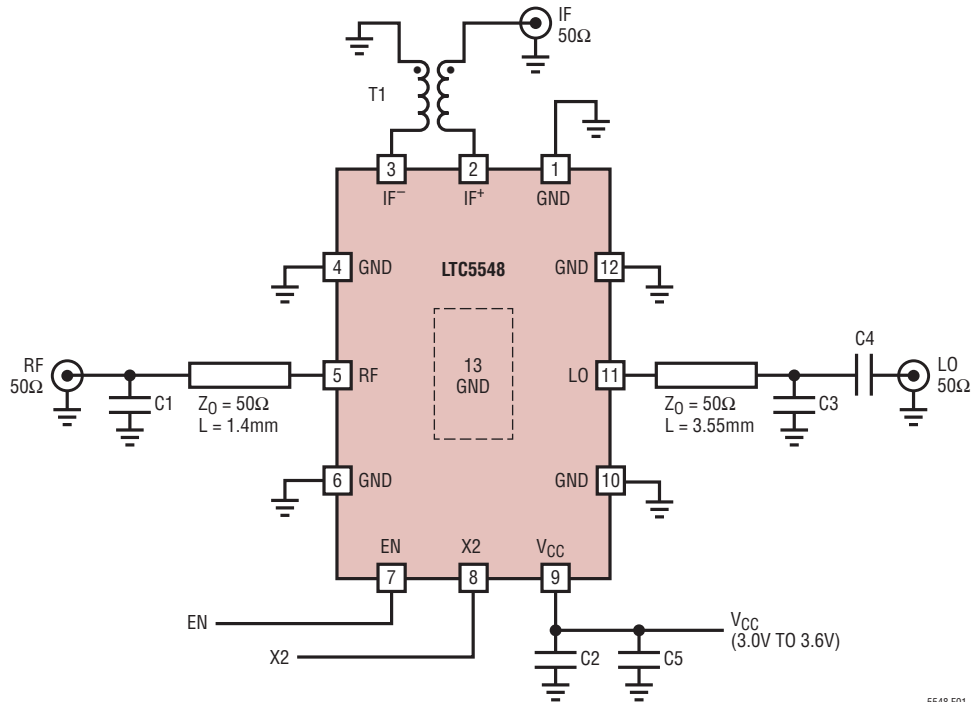

5548 F01

| REF DES | VALUE        | SIZE | VENDOR        | COMMENT             |
|---------|--------------|------|---------------|---------------------|
| C1, C3  | 0.15pF       | 0402 | AVX           | ACCU-P 04021JR15ZBS |
| C2, C4  | 22pF         | 0402 | AVX           | 0402A220JAT2A       |
| C5      | 1μF          | 0603 | Murata        | GRM188R71A105KA61   |
| T1      | TC1-1-13M+ * |      | Mini Circuits | IF = 4.5MHz to 3GHz |
|         | TCM1-83X+    |      | Mini Circuits | IF = 10MHz to 6GHz  |

\* Standard Evaluation Board Configuration

Figure 1. Standard Test Circuit Schematic

# APPLICATIONS INFORMATION

## Introduction

The LTC5548 consists of a high linearity double-balanced mixer core, LO buffer amplifier, LO frequency doubler and bias/enable circuits. See the Block Diagram section for a description of each pin function. The RF and LO are single-ended terminals. The IF is differential. An external balun is needed if a single-ended IF signal is desired. The LTC5548 can be used as a frequency downconverter where the RF is used as an input and IF is used as an output. It can also be used as a frequency upconverter where the IF is used as an input and RF is used as an output. Low side or high side LO injection can be used. The evaluation circuit and the evaluation board layout are shown in Figure 1 and Figure 2, respectively.

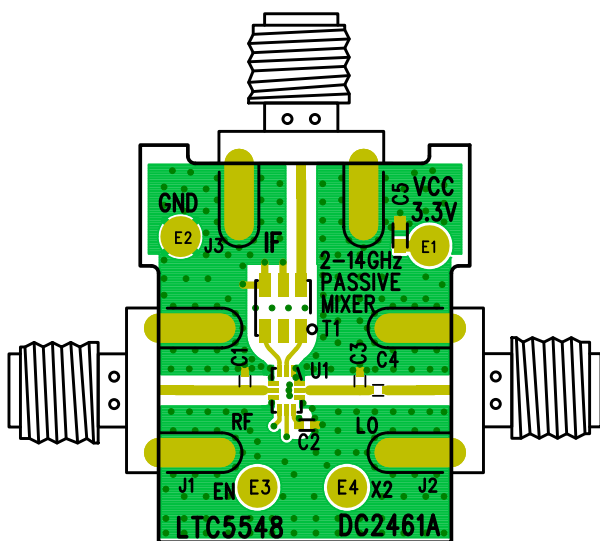


Figure 2. Evaluation Board Layout

## RF Port

The mixer’s RF port, shown in Figure 3, is connected to the primary winding of an integrated transformer. The primary side of the RF transformer is DC-grounded internally and the DC resistance of the primary side is approximately 3.2Ω. A DC blocking capacitor is needed if the RF source has DC voltage present. The secondary winding of the RF transformer is internally connected to the mixer core.



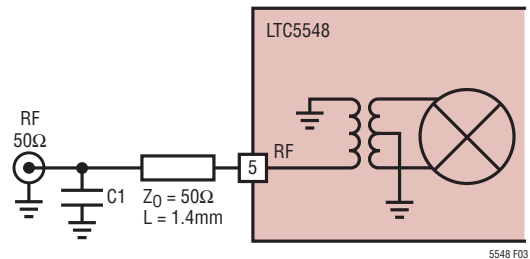


Figure 3. Simplified RF Port Interface Schematic

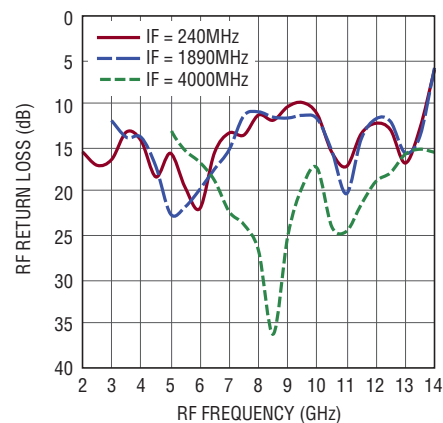

(a)

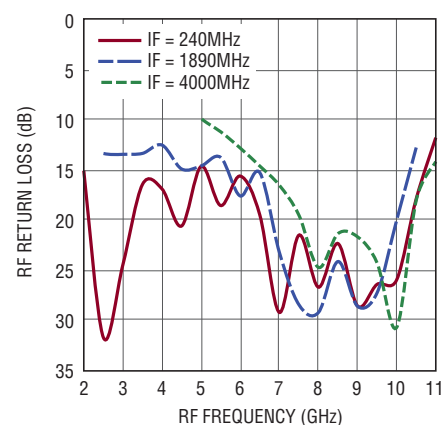

(b)

Figure 4. RF Port Return Loss (a) C1 = 0.15pF (b) C1 Open

## APPLICATIONS INFORMATION

The RF port is broadband matched to  $50\Omega$  from 2GHz to 14GHz with a 0.15pF shunt capacitor (C1) located 1.4mm away from the RF pin. The RF port is  $50\Omega$  matched from 2GHz to 10GHz without C1. An LO between  $-6\text{dBm}$  and  $6\text{dBm}$  is required for good RF impedance matching. The measured RF input return loss is shown in Figure 4 for IF frequencies of 240MHz, 1890MHz and 4GHz with low side LO.

The RF input impedance and input reflection coefficient versus RF frequency is listed in Table 1. The reference plane for this data is Pin 5 of the IC, with no external matching, and the LO is driven at 7.5GHz.

**Table 1. RF Input Impedance and S11 (at Pin 5, No External Matching, LO Input Driven at 7.5GHz)**

| FREQUENCY (GHz) | INPUT IMPEDANCE | S11  |        |
|-----------------|-----------------|------|--------|
|                 |                 | MAG  | ANGLE  |
| 2               | 34.3+j28.9      | 0.37 | 99.6   |
| 3               | 49.4+j24.7      | 0.24 | 77.4   |
| 4               | 57.2-j3.8       | 0.08 | -25.8  |
| 5               | 37.7+j4.4       | 0.15 | 157.4  |
| 6               | 43.4+j2.2       | 0.07 | 160.2  |
| 7               | 46.2-j1.9       | 0.04 | -152.3 |
| 8               | 47.8-j1.1       | 0.02 | -155.0 |


**Table 1. RF Input Impedance and S11 (at Pin 5, No External Matching, LO Input Driven at 7.5GHz)**

|    |           |      |        |
|----|-----------|------|--------|
| 9  | 48.8+j0.6 | 0.01 | 152.8  |
| 10 | 46.1+j9.1 | 0.10 | 107.8  |
| 11 | 35.8+j3.2 | 0.17 | 165.2  |
| 12 | 16.3+j4.1 | 0.51 | 169.5  |
| 13 | 10.9+j2.3 | 0.64 | 174.5  |
| 14 | 12.9-j3.5 | 0.59 | -171.4 |

### LO Input

The mixer's LO input, shown in Figure 5, consists of a single-ended to differential conversion, high speed limiting differential amplifier and an LO frequency doubler. The LO amplifier is optimized for the 1GHz to 12GHz LO frequency range. LO frequencies above or below this frequency range may be used with degraded performance. The LO frequency doubler is controlled by a digital voltage input at X2 (Pin 8). When the X2 voltage is higher than 1.2V, the LO frequency doubler is enabled. When X2 is left open or its voltage is lower than 0.3V, the LO frequency doubler is disabled.

The DC voltage at the LO input is about 1.6V. A DC blocking capacitor (C4) is required.

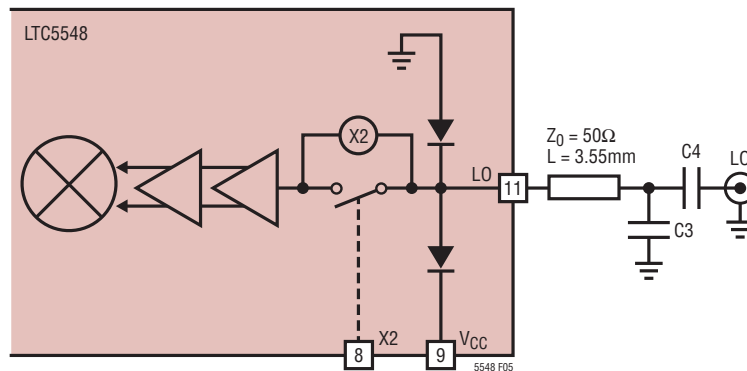

**Figure 5. Simplified LO Input Schematic**


## APPLICATIONS INFORMATION

The LO is 50Ω matched from 1GHz to 12GHz, with a 0.15pF shunt capacitor (C3) located 3.55mm away from the LO pin. External matching components may be needed for extended LO operating frequency range. The measured LO input return loss is shown in Figure 6. The LO return loss does not change when LO frequency double is enabled. The nominal LO input level is 0dBm, although the limiting amplifiers will deliver excellent performance over a ±6dBm input power range.

The LO input impedance and input reflection coefficient versus frequency, is shown in Table 2.


**Table 2. LO Input Impedance vs Frequency (at Pin 11, No External Matching)**

| FREQUENCY (GHz) | INPUT IMPEDANCE | S11  |        |
|-----------------|-----------------|------|--------|
|                 |                 | MAG  | ANGLE  |
| 1               | 63.8-j17.4      | 0.19 | -42.9  |
| 2               | 58.1-j12.7      | 0.14 | -50.8  |
| 3               | 50.5-j10.8      | 0.11 | -81.2  |
| 4               | 43.4-j9.1       | 0.12 | -120.4 |
| 5               | 36.7+j4.6       | 0.16 | 157.9  |
| 6               | 30.9-j6.8       | 0.25 | -155.6 |
| 7               | 28.1-j6.3       | 0.29 | -159.3 |
| 8               | 28.7-j5.1       | 0.28 | -162.8 |
| 9               | 28.9-j2.2       | 0.27 | -172.5 |
| 10              | 26.4+j2.6       | 0.31 | 171.8  |
| 11              | 24.1+j3.1       | 0.35 | 170.8  |
| 12              | 24.3+j0.3       | 0.35 | 179.1  |

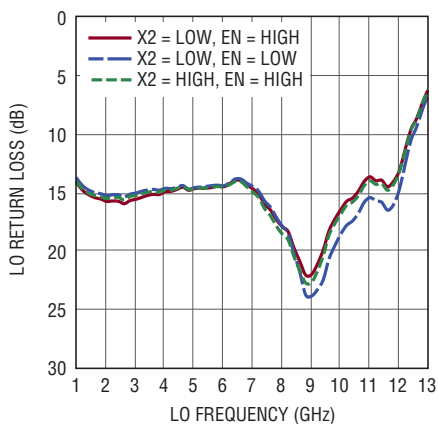

5548 F06a

**(a) C3 = 0.15pF**

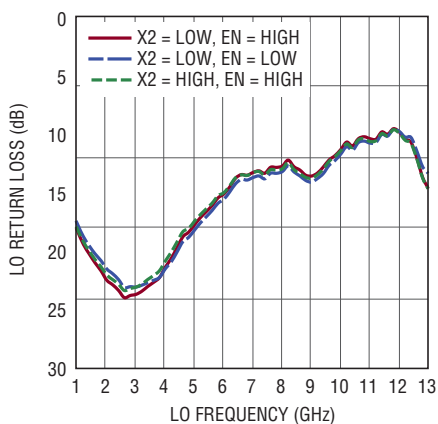

5548 F06b

**(b) C3 Open**

**Figure 6. LO Input Return Loss**

## APPLICATIONS INFORMATION

### IF Port

The mixer's IF port is differential as shown in Figure 7. ESD protection diodes are connected to both of these ports.

The impedance of the IF<sup>+</sup> and IF<sup>-</sup> terminals is approximately 25Ω in parallel with 0.25pF. An external 1:1 balun is required for a 50Ω single-ended IF. Using a TC1-1-13M+ balun, for example, the IF port is broadband matched from 4.5MHz to 3GHz, when the LO is applied.

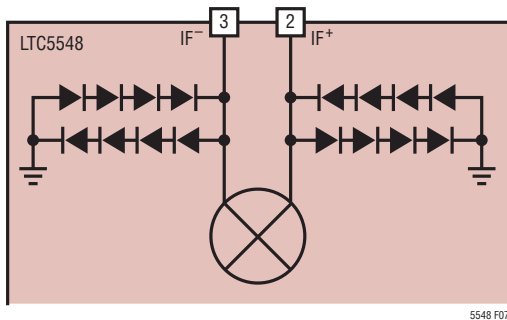


Figure 7. Simplified IF Port Schematic

The measured IF port return loss is shown in Figure 8.

The differential IF output of the LTC5548 is suitable for directly driving a wideband differential amplifier or filter. Figure 9 shows a schematic for the evaluation of LTC5548 with a differential IF at very low IF frequency.

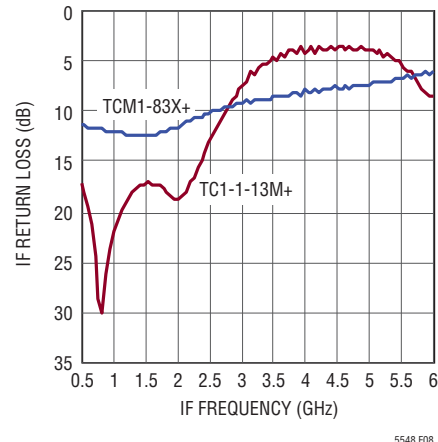


Figure 8. IF Port Return Loss


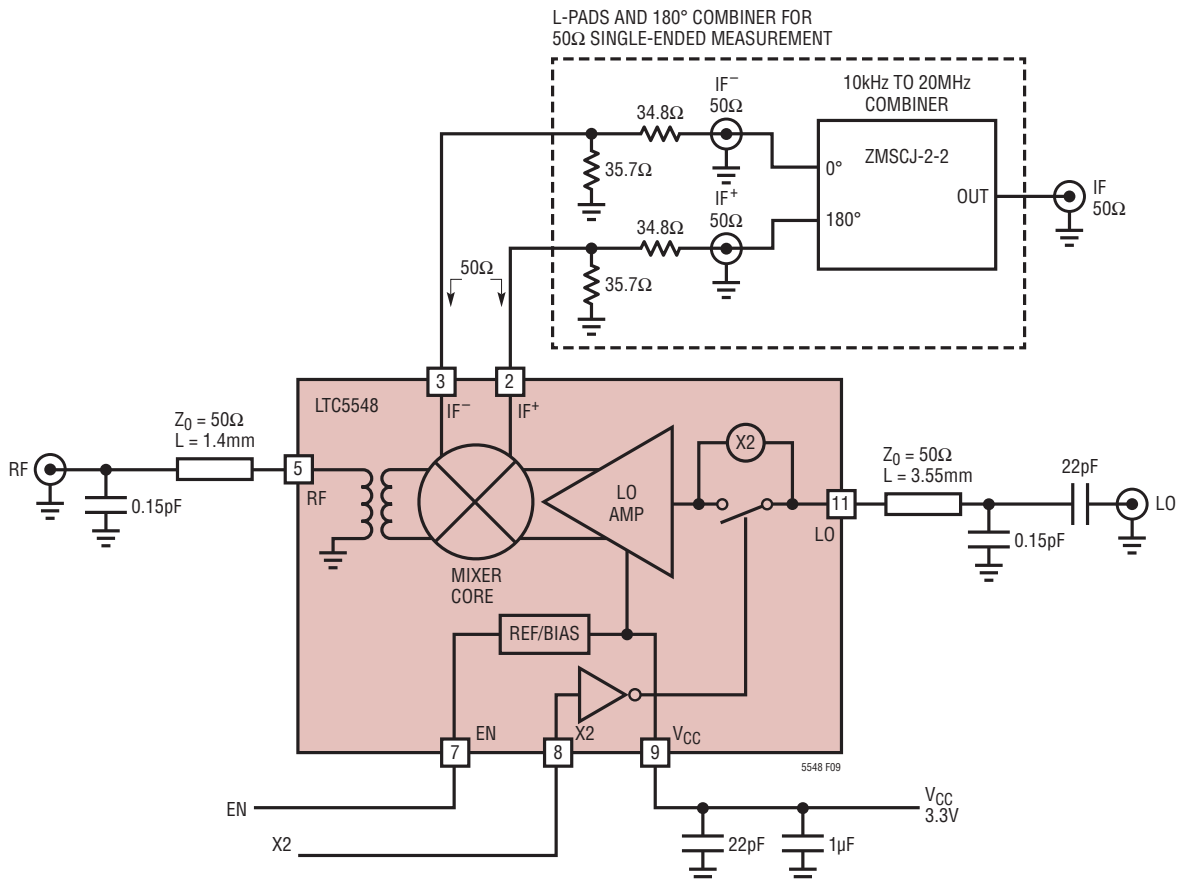



Figure 9. Test Circuit for Wideband Differential Output at IF Frequency of 10kHz to 20MHz

## APPLICATIONS INFORMATION

The complete test circuit, shown in Figure 9, uses resistive impedance matching attenuators (L-pads) on an evaluation board to transform each 25Ω IF output to 50Ω. An external 0°/180° power combiner is then used to convert the 100Ω differential output to 50Ω single-ended to facilitate measurement. The measured performance is shown in Figure 10. The measured results do not include the loss of the L-pads and external 180° combiner.

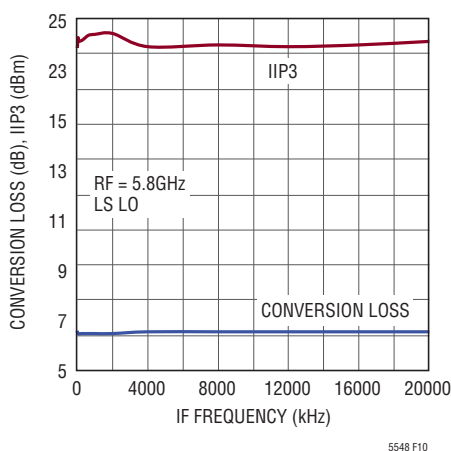

**Figure 10. Conversion Gain and IIP3 for Differential IF Frequency of 10kHz to 20MHz**

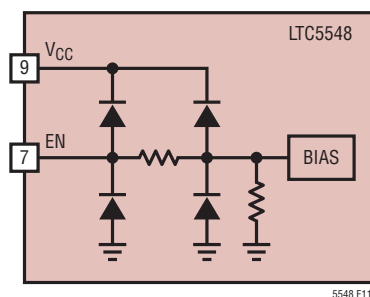

**Figure 11. Simplified Enable Input Circuit**

### Enable Interface


Figure 11 shows a simplified schematic of the EN pin interface. To enable the chip, the EN voltage must be higher than 1.2V. The voltage at the EN pin should never exceed  $V_{CC}$  by more than 0.3V. If this should occur, the supply current could be sourced through the ESD diode, potentially damaging the IC. If the EN pin is left floating, its voltage will be pulled low by the internal pull-down resistor and the chip will be disabled.

### X2 Interface

Figure 12 shows a simplified schematic of the X2 pin interface. To enable the integrated LO frequency doubler, the X2 voltage must be higher than 1.2V. The X2 voltage at the pin should never exceed  $V_{CC}$  by more than 0.3V. If this should occur, the supply current could be sourced through the ESD diode, potentially damaging the IC. If the X2 pin is left floating, its voltage will be pulled low by the internal pull-down resistor and the LO frequency doubler will be disabled.

### Supply Voltage Ramping

Fast ramping of the supply voltage can cause a current glitch in the internal ESD protection circuits. Depending on the supply inductance, this could result in a supply voltage transient that exceeds the maximum rating. A supply voltage ramp time of greater than 1ms is recommended.

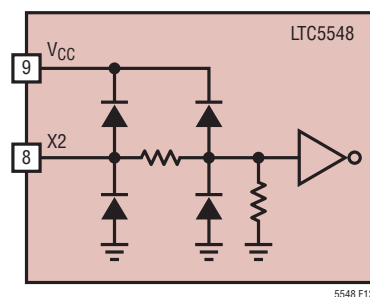

**Figure 12. Simplified X2 Interface Circuit**

## APPLICATIONS INFORMATION

### Spurious Output Levels

Mixer spurious output levels versus harmonics of the RF and LO are tabulated in Table 3. The spur levels were measured on a standard evaluation board using the test circuit shown in Figure 1. The spur frequencies can be calculated using the following equation:

$$\text{Frequency Downconversion: } f_{\text{SPUR}} = (M \cdot f_{\text{RF}}) \pm (N \cdot f_{\text{LO}})$$

$$\text{Frequency Upconversion: } f_{\text{SPUR}} = (M \cdot f_{\text{IF}}) \pm (N \cdot f_{\text{LO}})$$

**Table 3a. Downconversion IF Output Spur Levels (dBc): LO Frequency Doubler Off (X2 = Low):  $f_{\text{SPUR}} = (M \cdot f_{\text{RF}}) - (N \cdot f_{\text{LO}})$**

RF = 5250MHz, P<sub>RF</sub> = -6dBm, P<sub>LO</sub> = 0dBm, LO = 4900MHz

|   |   | N   |     |     |     |     |     |
|---|---|-----|-----|-----|-----|-----|-----|
|   |   | 0   | 1   | 2   | 3   | 4   | 5   |
| M | 0 |     | -25 | -5  | -37 | -45 | *   |
|   | 1 | -51 | 0   | -42 | -16 | -59 | -56 |
|   | 2 | -72 | -69 | -81 | -77 | -71 | -75 |
|   | 3 | -75 | -72 | -78 | -61 | -79 | -69 |
|   | 4 | *   | -75 | -77 | -79 | -81 | -78 |
|   | 5 | *   | *   | -74 | -78 | -77 | -81 |

\*Out of the test equipment range.

**Table 3b. Downconversion IF Output Spur Levels (dBc): LO Frequency Doubler On (X2 = High):  $f_{\text{SPUR}} = (M \cdot f_{\text{RF}}) - (N \cdot f_{\text{LO}})$**

RF = 5252MHz, P<sub>RF</sub> = -6dBm, P<sub>LO</sub> = 0dBm, LO = 2450MHz


|   |   | N   |     |     |     |     |     |     |     |     |
|---|---|-----|-----|-----|-----|-----|-----|-----|-----|-----|
|   |   | 0   | 1   | 2   | 3   | 4   | 5   | 6   | 7   | 8   |
| M | 0 |     | -24 | -14 | -8  | -5  | -22 | -32 | -32 | -51 |
|   | 1 | -25 | -18 | 0   | -18 | -29 | -28 | -18 | -29 | -43 |
|   | 2 | -67 | -77 | -64 | -61 | -60 | -61 | -68 | -70 | -65 |
|   | 3 | -75 | -74 | -72 | -78 | -72 | -76 | -63 | -69 | -78 |
|   | 4 | *   | -76 | -74 | -74 | -74 | -76 | -67 | -77 | -68 |
|   | 5 | *   | *   | *   | -75 | -75 | -74 | -69 | -66 | -70 |

\*Out of the test equipment range.

## PACKAGE DESCRIPTION

Please refer to <http://www.linear.com/product/LTC5548#packaging> for the most recent package drawings.

**UDB Package  
Variation A  
12-Lead Plastic QFN (3mm × 2mm)**  
(Reference LTC DWG # 05-08-1985 Rev 0)

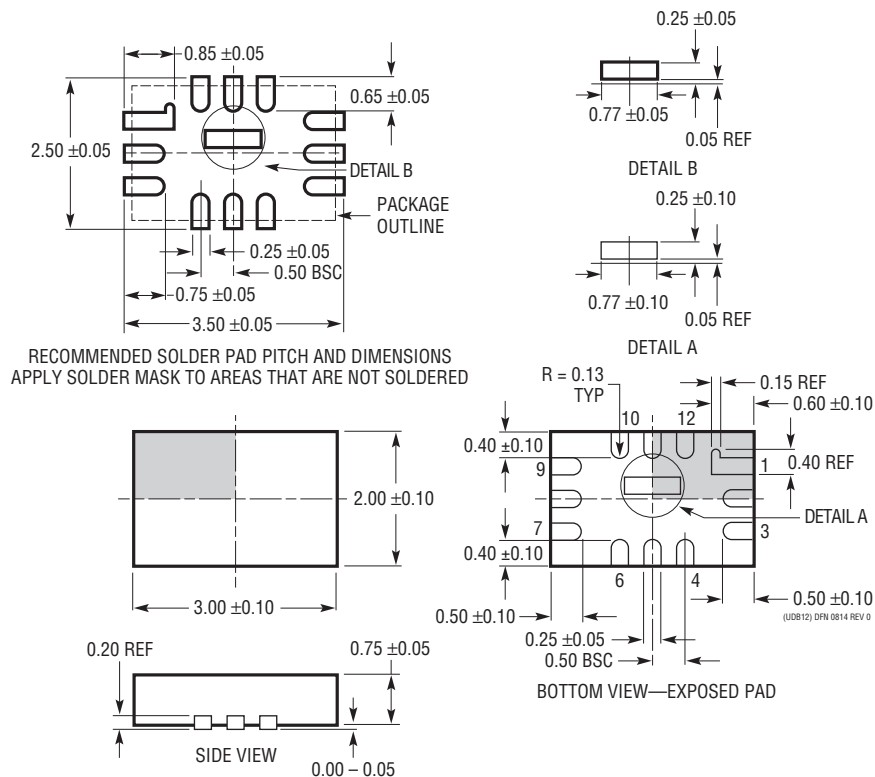


**NOTE:**


1. DRAWING IS NOT A JEDEC PACKAGE OUTLINE
2. DRAWING NOT TO SCALE
3. ALL DIMENSIONS ARE IN MILLIMETERS
4. DIMENSIONS OF EXPOSED PAD ON BOTTOM OF PACKAGE DO NOT INCLUDE MOLD FLASH. MOLD FLASH, IF PRESENT, SHALL NOT EXCEED 0.15mm ON ANY SIDE
5. EXPOSED PAD SHALL BE SOLDER PLATED
6. SHADED AREA IS ONLY A REFERENCE FOR PIN 1 LOCATION ON THE TOP AND BOTTOM OF PACKAGE

## TYPICAL APPLICATION

### Wideband 10MHz to 6GHz Upconversion to 6.5GHz

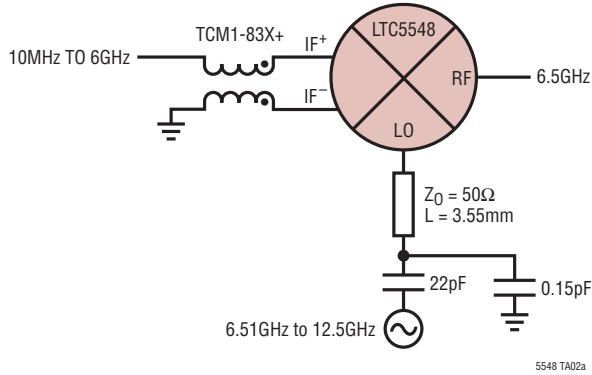

### Conversion Loss and IIP3 vs Input Frequency (High Side LO)

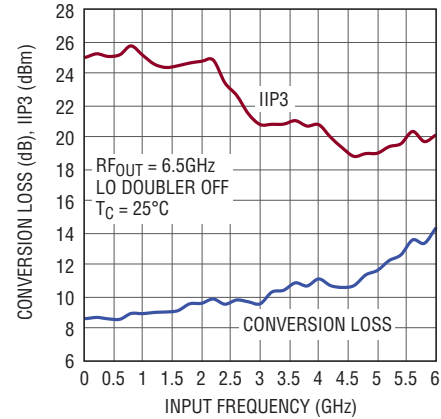

## RELATED PARTS

| PART NUMBER                                | DESCRIPTION                                                    | COMMENTS                                                                                                                          |
|--------------------------------------------|----------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------|
| <b>Mixers, Modulators and Demodulators</b> |                                                                |                                                                                                                                   |
| LTC5549                                    | 2GHz to 14GHz Microwave Mixer                                  | 8dB Conversion Loss, 24dBm IIP3, 500MHz to 6GHz Single-Ended IF with Integrated Balun                                             |
| LTC5544                                    | 4GHz to 6GHz Downconverting Mixer                              | 7.5dB Gain, >25dBm IIP3 and 10dB NF, 3.3V/200mA Supply                                                                            |
| LTC5576                                    | 3GHz to 8GHz High Linearity Active Upconverting Mixer          | 25dBm OIP3, -0.6dB Gain, 14.1dB NF, -154dBm/Hz Output Noise Floor, -28dBm LO Leakage at 8GHz                                      |
| LTC5551                                    | 300MHz to 3.5GHz Ultrahigh Dynamic Range Downconverting Mixer  | +36dBm IIP3; 2.4dB Gain, <10dB NF, 0dBm LO Drive, +18dBm P1dB, 670mW Power Consumption                                            |
| LTC5567                                    | 400MHz to 4GHz, Active Downconverting Mixer                    | 1.9dB Gain, 26.9dBm IIP3 and 11.8dB NF at 1950MHz, 3.3V/89mA Supply                                                               |
| LTC5577                                    | 300MHz to 6GHz High Signal Level Active Downconverting Mixer   | 50Ω Matched Input from 1.3GHz to 4.3GHz, 30dBm IIP3, 0dB Gain, >40dB LO-RF Isolation, 0dBm LO Drive                               |
| LTC5510                                    | 1MHz to 6GHz Wideband High Linearity Active Mixer              | 50Ω Matched Input from 30MHz to 6GHz, 27dBm OIP3, 1.5dB Gain, Up- or Down-Conversion                                              |
| LTC5585                                    | 4GHz Wideband I/Q Demodulator                                  | 400MHz to 4GHz Direct Conversion, 25.7dBm IIP3; 60dBm, IIP2 Adjustable to >85dBm, DC Offset Cancellation, >500MHz I & Q Bandwidth |
| LTC5588-1                                  | 6GHz I/Q Modulator                                             | 200MHz to 6GHz Direct Conversion, 31dBm OIP3 Adjustable to 34dBm, -160dBm/Hz Output Noise Floor, Excellent ACPR                   |
| <b>Amplifiers</b>                          |                                                                |                                                                                                                                   |
| LTC6430-20                                 | High Linearity Differential IF Amp                             | 20MHz to 2GHz Bandwidth, 20.8dB Gain, 51dBm OIP3, 2.9dB NF at 240MHz                                                              |
| LTC6431-20                                 | High Linearity Single-Ended IF Amp                             | 20MHz to 1.4GHz Bandwidth, 20.8dB Gain, 46.2dBm OIP3, 2.6dB NF at 240MHz                                                          |
| <b>RF Power Detectors</b>                  |                                                                |                                                                                                                                   |
| LTC5564                                    | 15GHz Ultra Fast 7ns Response Time RF Detector with Comparator | 600MHz to 15GHz, -24dB to 16dBm Input Power Range, 9ns Comparator Response Time, 125°C Version                                    |
| LT5581                                     | 6GHz Low Power RMS Detector                                    | 40dB Dynamic Range, ±1dB Accuracy Over Temperature, 1.5mA Supply Current                                                          |
| LTC5582                                    | 40MHz to 10GHz RMS Detector                                    | ±0.5dB Accuracy Over Temperature, ±0.2dB Linearity Error, 57dB Dynamic Range                                                      |
| LTC5583                                    | Dual 6GHz RMS Power Detector                                   | Up to 60dB Dynamic Range, ±0.5dB Accuracy Over Temperature, >50dB Isolation                                                       |
| <b>RF PLL/Synthesizer with VCO</b>         |                                                                |                                                                                                                                   |
| LTC6948                                    | Ultralow Noise, Low Spurious Frac-N PLL with Integrated VCO    | 373MHz to 6.39GHz, -157dBc/Hz WB Phase Noise Floor, -274dBc/Hz Normalized In-Band 1/f Noise                                       |

## Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

- ⊖ [View LTC5548IUDB#TRPBF on WIN SOURCE](#)
- ⊖ [Analog Devices Inc. Information](#)

## Optimize Your Supply Chain with WIN SOURCE Solutions

- ✓ Global Sourcing Solution
- ✓ Obsolete Management
- ✓ Cost Control Management
- ✓ Shortage Management
- ✓ Alternative Solution
- ✓ Excess Inventory Management