



**THE DATASHEET OF  
UUL1H100MCL1GS**



# ALUMINUM ELECTROLYTIC CAPACITORS

# UUL

Chip Type, Long Life Assurance



- Chip type with load life of 5000 hours at +105°C.
- Designed for surface mounting on high density PC board.
- Compliant to the RoHS directive (2011/65/EU,(EU)2015/863).
- AEC-Q200 Qualified. Please contact us for details.




## Specifications

| Item                          | Performance Characteristics   |                     |  |    |    |    |    |                    |  |       |   |                 |   |
|-------------------------------|---|---------------------|--|----|----|----|----|--------------------|--|-------|---|-----------------|---|
| Category Temperature Range    | -40 to +105°C   |                     |  |    |    |    |    |                    |  |       |   |                 |   |
| Rated Voltage Range           | 6.3 to 50V  |                     |  |    |    |    |    |                    |  |       |   |                 |   |
| Rated Capacitance Range       | 1 to 1000μF   |                     |  |    |    |    |    |                    |  |       |   |                 |   |
| Capacitance Tolerance         | ±20% at 120Hz, 20°C   |                     |  |    |    |    |    |                    |  |       |   |                 |   |
| Leakage Current ※             | After 2 minutes' application of rated voltage at 20°C, leakage current is not more than 0.01 CV or 3 (μA) , whichever is greater.   |                     |  |    |    |    |    |                    |  |       |   |                 |   |
| Tangent of loss angle (tan δ) | Measurement frequency : 120Hz at 20°C   |                     |  |    |    |    |    |                    |  |       |   |                 |   |
|                               | Rated voltage (V)   | 6.3                 | 10   | 16 | 25 | 35 | 50 |                    |  |       |   |                 |   |
| Stability at Low Temperature  | Measurement frequency : 120Hz   |                     |  |    |    |    |    |                    |  |       |   |                 |   |
|                               | Rated voltage (V)   | 6.3                 | 10   | 16 | 25 | 35 | 50 |                    |  |       |   |                 |   |
|                               | Impedance ratio Z(-25°C) / Z(+20°C)   | 4                   | 3  | 2  | 2  | 2  | 2  |                    |  |       |   |                 |   |
| Endurance                     | ZT / Z20 (max.)   | Z(-40°C) / Z(+20°C) | 10   | 7  | 5  | 3  | 3  |                    |  |       |   |                 |   |
|                               | The specifications listed at right shall be met when the capacitors are restored to 20°C after the rated voltage is applied for 5000 hours at 105°C.  |                     | <table border="1"> <tr> <td>Capacitance change</td> <td>Within ±30% of the initial capacitance value</td> </tr> <tr> <td>tan δ</td> <td>300% or less than the initial specified value</td> </tr> <tr> <td>Leakage current</td> <td>Less than or equal to the initial specified value</td> </tr> </table>     |    |    |    |    | Capacitance change | Within ±30% of the initial capacitance value | tan δ | 300% or less than the initial specified value     | Leakage current | Less than or equal to the initial specified value |
| Capacitance change            | Within ±30% of the initial capacitance value  |                     |  |    |    |    |    |                    |  |       |   |                 |   |
| tan δ                         | 300% or less than the initial specified value   |                     |  |    |    |    |    |                    |  |       |   |                 |   |
| Leakage current               | Less than or equal to the initial specified value   |                     |  |    |    |    |    |                    |  |       |   |                 |   |
| Shelf Life                    | After storing the capacitors under no load at 105°C for 1000 hours and then performing voltage treatment based on JIS C 5101-4 clause 4.1 at 20°C, they shall meet the specified values for the endurance characteristics listed above. |                     |  |    |    |    |    |                    |  |       |   |                 |   |
| Resistance to soldering heat  | The capacitors are kept on a hot plate for 30 seconds, which is maintained at 250°C. The capacitors shall meet the characteristic requirements listed at right when they are removed from the plate and restored to 20°C.               |                     | <table border="1"> <tr> <td>Capacitance change</td> <td>Within ±10% of the initial capacitance value</td> </tr> <tr> <td>tan δ</td> <td>Less than or equal to the initial specified value</td> </tr> <tr> <td>Leakage current</td> <td>Less than or equal to the initial specified value</td> </tr> </table> |    |    |    |    | Capacitance change | Within ±10% of the initial capacitance value | tan δ | Less than or equal to the initial specified value | Leakage current | Less than or equal to the initial specified value |
| Capacitance change            | Within ±10% of the initial capacitance value  |                     |  |    |    |    |    |                    |  |       |   |                 |   |
| tan δ                         | Less than or equal to the initial specified value   |                     |  |    |    |    |    |                    |  |       |   |                 |   |
| Leakage current               | Less than or equal to the initial specified value   |                     |  |    |    |    |    |                    |  |       |   |                 |   |
| Marking                       | Black print on the case top.  |                     |  |    |    |    |    |                    |  |       |   |                 |   |


※ I : Leakage Current (μA), C : Rated Capacitance (μF), V : Rated Voltage (V)

## Chip Type

(φ4 to φ6.3)

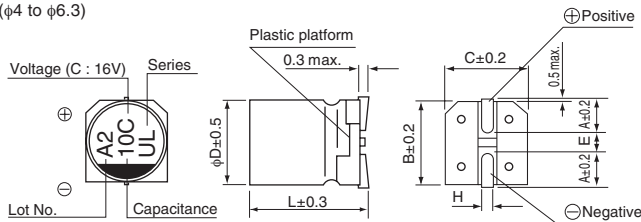


(φ8, φ10)

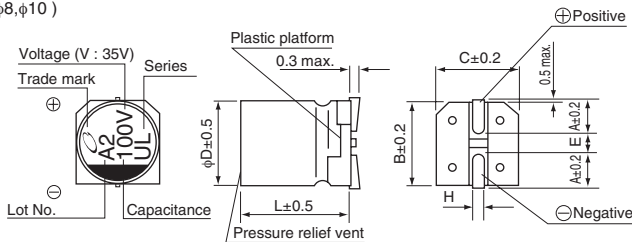

| Voltage | 6.3 | 10 | 16 | 25 | 35 | 50 |
|---------|-----|----|----|----|----|----|
| V       | 6.3 | 10 | 16 | 25 | 35 | 50 |
| Code    | j   | A  | C  | E  | V  | H  |

## Type numbering system (Example : 16V 100μF)

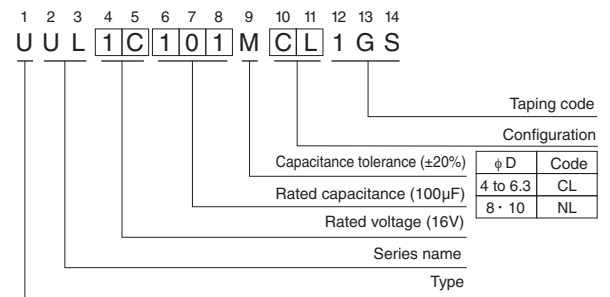

| φ D × L (mm) | 4 × 5.8    | 5 × 5.8    | 6.3 × 5.8  | 6.3 × 7.7  | 8 × 10     | 10 × 10    |
|--------------|------------|------------|------------|------------|------------|------------|
| A            | 1.8        | 2.1        | 2.4        | 2.4        | 2.9        | 3.2        |
| B            | 4.3        | 5.3        | 6.6        | 6.6        | 8.3        | 10.3       |
| C            | 4.3        | 5.3        | 6.6        | 6.6        | 8.3        | 10.3       |
| E            | 1.0        | 1.3        | 2.2        | 2.2        | 3.1        | 4.5        |
| L            | 5.8        | 5.8        | 5.8        | 7.7        | 10         | 10         |
| H            | 0.5 to 0.8 | 0.5 to 0.8 | 0.5 to 0.8 | 0.5 to 0.8 | 0.8 to 1.1 | 0.8 to 1.1 |

## Frequency coefficient of rated ripple current

| Frequency   | 50 Hz | 120 Hz | 300 Hz | 1 kHz | 10 kHz or more |
|-------------|-------|--------|--------|-------|----------------|
| Coefficient | 0.70  | 1.00   | 1.17   | 1.36  | 1.50           |

● Dimension table in next page.

UUL



## ■ Dimensions

| Rated Voltage (V) (code) | Rated Capacitance (μF) | Case Size φD×L (mm) | tan δ | Leakage Current (μA) (at 20°C after 2 minutes) | Rated Ripple (mArms) (105°C/120Hz) | Part Number    |
|--------------------------|------------------------|---------------------|-------|--|------------------------------------|----------------|
| 6.3 (0J)                 | 33                     | 5×5.8               | 0.32  | 3  | 35                                 | UUL0J330MCL1GS |
|                          | 47                     | 5×5.8               | 0.32  | 3  | 36                                 | UUL0J470MCL1GS |
|                          | 100                    | 6.3×5.8             | 0.32  | 6.3  | 60                                 | UUL0J101MCL1GS |
|                          | 220                    | 6.3×7.7             | 0.32  | 13.86  | 101                                | UUL0J221MCL1GS |
|                          | 330                    | 8×10                | 0.32  | 20.79  | 160                                | UUL0J331MNL1GS |
|                          | 470                    | 10×10               | 0.32  | 29.61  | 254                                | UUL0J471MNL1GS |
|                          | 1000                   | 10×10               | 0.32  | 63   | 313                                | UUL0J102MNL1GS |
| 10 (1A)                  | 22                     | 5×5.8               | 0.24  | 3  | 30                                 | UUL1A220MCL1GS |
|                          | 33                     | 5×5.8               | 0.24  | 3.3  | 35                                 | UUL1A330MCL1GS |
|                          | 47                     | 6.3×5.8             | 0.24  | 4.7  | 50                                 | UUL1A470MCL1GS |
|                          | 100                    | 6.3×7.7             | 0.24  | 10   | 81                                 | UUL1A101MCL1GS |
|                          | 220                    | 8×10                | 0.24  | 22   | 141                                | UUL1A221MNL1GS |
|                          | 330                    | 10×10               | 0.24  | 33   | 238                                | UUL1A331MNL1GS |
|                          | 470                    | 10×10               | 0.24  | 47   | 254                                | UUL1A471MNL1GS |
| 16 (1C)                  | 10                     | 4×5.8               | 0.20  | 3  | 18                                 | UUL1C100MCL1GS |
|                          | 22                     | 5×5.8               | 0.20  | 3.52   | 30                                 | UUL1C220MCL1GS |
|                          | 33                     | 6.3×5.8             | 0.20  | 5.28   | 48                                 | UUL1C330MCL1GS |
|                          | 47                     | 6.3×5.8             | 0.20  | 7.52   | 50                                 | UUL1C470MCL1GS |
|                          | 100                    | 6.3×7.7             | 0.20  | 16   | 81                                 | UUL1C101MCL1GS |
|                          | 220                    | 10×10               | 0.20  | 35.2   | 216                                | UUL1C221MNL1GS |
|                          | 330                    | 10×10               | 0.20  | 52.8   | 238                                | UUL1C331MNL1GS |
|                          | 470                    | 10×10               | 0.20  | 75.2   | 254                                | UUL1C471MNL1GS |
| 25 (1E)                  | 10                     | 5×5.8               | 0.16  | 3  | 25                                 | UUL1E100MCL1GS |
|                          | 22                     | 6.3×5.8             | 0.16  | 5.5  | 42                                 | UUL1E220MCL1GS |
|                          | 33                     | 6.3×5.8             | 0.16  | 8.25   | 48                                 | UUL1E330MCL1GS |
|                          | 47                     | 6.3×7.7             | 0.16  | 11.75  | 63                                 | UUL1E470MCL1GS |
|                          | 100                    | 8×10                | 0.16  | 25   | 116                                | UUL1E101MNL1GS |
|                          | 220                    | 10×10               | 0.16  | 55   | 216                                | UUL1E221MNL1GS |
|                          | 330                    | 10×10               | 0.16  | 82.5   | 238                                | UUL1E331MNL1GS |
| 35 (1V)                  | 4.7                    | 4×5.8               | 0.13  | 3  | 15                                 | UUL1V470MCL1GS |
|                          | 10                     | 5×5.8               | 0.13  | 3.5  | 25                                 | UUL1V100MCL1GS |
|                          | 22                     | 6.3×5.8             | 0.13  | 7.7  | 42                                 | UUL1V220MCL1GS |
|                          | 33                     | 6.3×7.7             | 0.13  | 11.55  | 57                                 | UUL1V330MCL1GS |
|                          | 47                     | 8×10                | 0.13  | 16.45  | 92                                 | UUL1V470MNL1GS |
|                          | 100                    | 10×10               | 0.13  | 35   | 151                                | UUL1V101MNL1GS |
|                          | 220                    | 10×10               | 0.13  | 77   | 216                                | UUL1V221MNL1GS |
| 50 (1H)                  | 1                      | 4×5.8               | 0.12  | 3  | 6.2                                | UUL1H010MCL1GS |
|                          | 2.2                    | 4×5.8               | 0.12  | 3  | 11                                 | UUL1H2R2MCL1GS |
|                          | 3.3                    | 4×5.8               | 0.12  | 3  | 14                                 | UUL1H3R3MCL1GS |
|                          | 4.7                    | 5×5.8               | 0.12  | 3  | 19                                 | UUL1H4R7MCL1GS |
|                          | 10                     | 6.3×5.8             | 0.12  | 5  | 30                                 | UUL1H100MCL1GS |
|                          | 22                     | 6.3×7.7             | 0.12  | 11   | 49                                 | UUL1H220MCL1GS |
|                          | 33                     | 8×10                | 0.12  | 16.5   | 77                                 | UUL1H330MNL1GS |
|                          | 47                     | 8×10                | 0.12  | 23.5   | 92                                 | UUL1H470MNL1GS |
|                          | 100                    | 10×10               | 0.12  | 50   | 151                                | UUL1H101MNL1GS |

• For taping specifications, recommended land size/soldering by reflow and minimum order quantity, please refer to the Guidelines for Aluminum Electrolytic Capacitors.

## Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

-  [View UUL1H100MCL1GS on WIN SOURCE](#)
-  [Nichicon Information](#)

## Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management