




**THE DATASHEET OF
LTH-040-01-G-D-A**



LOW PROFILE BLADE AND BEAM

(0.50 mm) .0197" PITCH • LTH/LSH SERIES

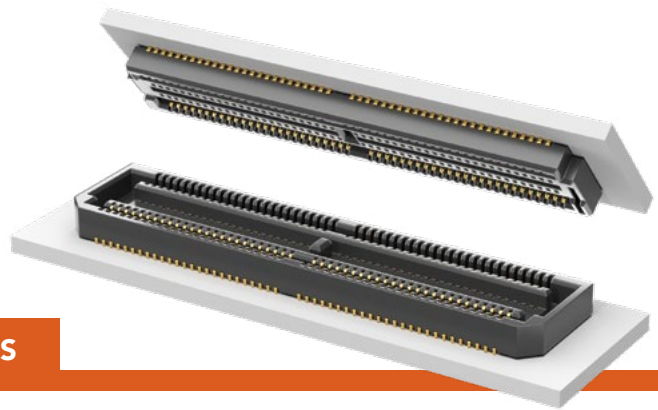

LTH
Mates:
LSH

LSH
Mates:
LTH

| | | | | | | | | | | | | |
|-----|---|--------------------------|---|----|---|----------------|---|---|---|---|---|--------------|
| LTH | - | NO. OF POSITIONS PER ROW | - | 01 | - | PLATING OPTION | - | D | - | A | - | OTHER OPTION |
|-----|---|--------------------------|---|----|---|----------------|---|---|---|---|---|--------------|

-010, -020,
-030, -040, -050

-G
= 10 μm
(0.25 μm)
Gold

-K
= (5.50 mm)
.217" DIA
Polyimide
film Pick &
Place Pad

-TR
= Tape & Reel

-FR
= Full Reel
Tape & Reel
(must order max.
quantity per reel;
contact Samtec for
quantity breaks)

SPECIFICATIONS

Insulator Material:

Liquid Crystal
Polymer

Terminal Material:

Phosphor Bronze

Contact Material:

BeCu

Plating:




Au over 50 μm (1.27 μm) Ni

Current Rating:

2.6 A per pin
(2 pins powered)

Operating Temp Range:

-55 °C to +125 °C

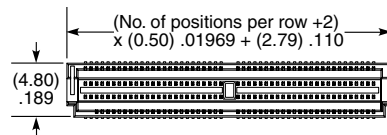

PROCESSING

Lead-Free Solderable:

Yes

SMT Lead Coplanarity:

(0.10 mm) .004" max

Board Stacking:

For applications requiring more than two connectors per board, contact ipg@samtec.com

| | | | | | | | | | | | | |
|-----|---|--------------------------|---|----|---|----------------|---|---|---|---|---|--------------|
| LSH | - | NO. OF POSITIONS PER ROW | - | 01 | - | PLATING OPTION | - | D | - | A | - | OTHER OPTION |
|-----|---|--------------------------|---|----|---|----------------|---|---|---|---|---|--------------|

-010, -020,
-030, -040, -050

-G
= 10 μm
(0.25 μm)
Gold

-K
= (7.50 mm)
.295" DIA
Polyimide
film Pick &
Place Pad




-TR
= Tape & Reel

-FR
= Full Reel
Tape & Reel
(must order max.
quantity per reel;
contact Samtec for
quantity breaks)

MATED HEIGHT

| LEAD STYLE | MATED HEIGHT* |
|------------|-----------------|
| -01 | (2.31 mm) .091" |

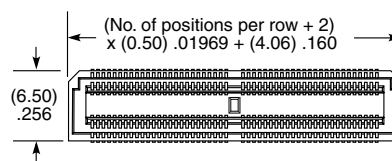

*Processing conditions will affect mated height.



Note:
Some lengths, styles and options are non-standard, non-returnable.

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

-  [View LTH-040-01-G-D-A on WIN SOURCE](#)
-  [Samtec Inc. Information](#)

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management