



**THE DATASHEET OF
UCW1C331MNL1GS**



ALUMINUM ELECTROLYTIC CAPACITORS

UCW

Chip Type, Low Impedance,
Long Life Assurance



- Chip type with load life of 7000 hours at +105°C.
Low impedance temperature range up to +105°C.
- Applicable to automatic mounting machine fed with carrier tape.
- Compliant to the RoHS directive (2011/65/EU, (EU)2015/863).
- AEC-Q200 Qualified. Please contact us for details.





Specifications


Item	Performance Characteristics						
Category Temperature Range	-25 to +105°C						
Rated Voltage Range	6.3 to 50V						
Rated Capacitance Range	10 to 470μF						
Capacitance Tolerance	±20% at 120Hz, 20°C						
Leakage Current ※	After 2 minutes' application of rated voltage at 20°C, leakage current is not more than 0.01 CV or 3 (μA), whichever is greater.						
Tangent of loss angle (tan δ)	Measurement frequency : 120Hz at 20°C						
	Rated voltage (V)	6.3	10	16	25	35	50
Stability at Low Temperature	Measurement frequency : 120Hz						
	Rated voltage (V)	6.3	10	16	25	35	50
Endurance	Impedance ratio ZT / Z20 (max.)	Z(-25°C) / Z(+20°C)	4	3	2	2	2
	Capacitance change	Within ±30% of the initial capacitance value					
Shelf Life	tan δ	300% or less than the initial specified value					
	Leakage current	Less than or equal to the initial specified value					
Resistance to soldering heat	Capacitance change	Within ±10% of the initial capacitance value					
	tan δ	Less than or equal to the initial specified value					
Marking	Leakage current	Less than or equal to the initial specified value					
	Black print on the case top.						

※ I : Leakage Current (μA), C : Rated Capacitance (μF), V : Rated Voltage (V)

Chip Type

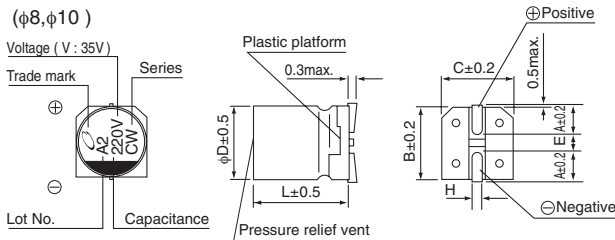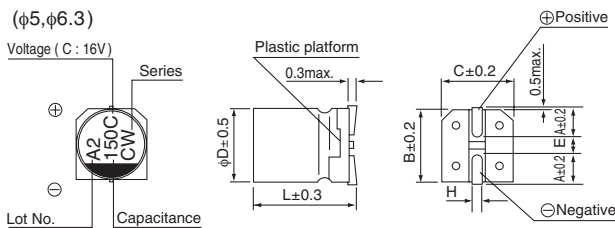

Type numbering system (Example : 10V 150μF)

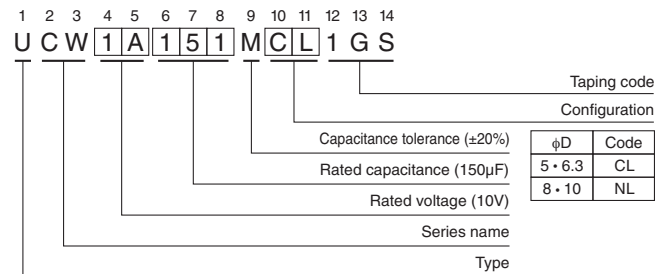

φD × L	(mm)				
	5 × 7	6.3 × 7	6.3 × 8.7	8 × 10	10 × 10
A	2.1	2.4	2.4	2.9	3.2
B	5.3	6.6	6.6	8.3	10.3
C	5.3	6.6	6.6	8.3	10.3
E	1.3	2.2	2.2	3.1	4.5
L	7.0	7.0	8.7	10	10
H	0.5 to 0.8	0.5 to 0.8	0.5 to 0.8	0.8 to 1.1	0.8 to 1.1

Voltage

V	6.3	10	16	25	35	50
Code	j	A	C	E	V	H

Frequency coefficient of rated ripple current

Frequency	50 Hz	120 Hz	300 Hz	1 kHz	10 kHz or more
Coefficient	0.35	0.50	0.64	0.83	1.00

● Dimension table in next page.

UCW



■ Dimensions

Rated Voltage (V) (code)	Rated Capacitance (μF)	Case Size φD×L (mm)	tan δ	Leakage Current (μA) (at 20°C after 2 minutes)	Impedance (Ω) max. (20°C/100kHz)	Rated Ripple (mA) (105°C/100kHz)	Part Number
6.3 (0J)	47	5×7	0.32	3	2.20	95	UCW0J470MCL1GS
	100	6.3×7	0.32	6.3	1.10	140	UCW0J101MCL1GS
	220	6.3×8.7	0.32	13.86	1.00	230	UCW0J221MCL1GS
	330	6.3×8.7	0.32	20.79	1.00	230	UCW0J331MCL1GS
	470	8×10	0.32	29.61	0.22	600	UCW0J471MNL1GS
10 (1A)	33	5×7	0.28	3.3	2.20	95	UCW1A330MCL1GS
	150	6.3×7	0.28	15	1.10	140	UCW1A151MCL1GS
16 (1C)	22	5×7	0.26	3.52	2.20	95	UCW1C220MCL1GS
	47	6.3×7	0.26	7.52	1.10	140	UCW1C470MCL1GS
	100	6.3×7	0.26	16	1.10	140	UCW1C101MCL1GS
	150	6.3×8.7	0.26	24	1.00	230	UCW1C151MCL1GS
	220	6.3×8.7	0.26	35.2	1.00	230	UCW1C221MCL1GS
	330	8×10	0.26	52.8	0.22	600	UCW1C331MNL1GS
	470	8×10	0.26	75.2	0.22	600	UCW1C471MNL1GS
25 (1E)	22	5×7	0.16	5.5	2.20	95	UCW1E220MCL1GS
	33	6.3×7	0.16	8.25	1.10	140	UCW1E330MCL1GS
	47	6.3×7	0.16	11.75	1.10	140	UCW1E470MCL1GS
	100	6.3×8.7	0.16	25	1.00	230	UCW1E101MCL1GS
	220	8×10	0.16	55	0.22	600	UCW1E221MNL1GS
	330	8×10	0.16	82.5	0.22	600	UCW1E331MNL1GS
	470	10×10	0.16	117.5	0.16	850	UCW1E471MNL1GS
35 (1V)	10	5×7	0.14	3.5	2.20	95	UCW1V100MCL1GS
	22	5×7	0.14	7.7	2.20	95	UCW1V220MCL1GS
	33	6.3×8.7	0.14	11.55	1.00	230	UCW1V330MCL1GS
	47	6.3×8.7	0.14	16.45	1.00	230	UCW1V470MCL1GS
	220	8×10	0.14	77	0.22	600	UCW1V221MNL1GS
	330	10×10	0.14	115.5	0.16	850	UCW1V331MNL1GS
50 (1H)	47	8×10	0.14	23.5	0.53	350	UCW1H470MNL1GS
	100	8×10	0.14	50	0.53	350	UCW1H101MNL1GS
	220	10×10	0.14	110	0.35	670	UCW1H221MNL1GS

- For taping specifications, recommended land size/soldering by reflow and minimum order quantity, please refer to the Guidelines for Aluminum Electrolytic Capacitors.

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

-  [View UCW1C331MNL1GS on WIN SOURCE](#)
-  [Nichicon Information](#)

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management