THE DATASHEET OF

FRX025-90F

Radial Leaded PTC Resettable Fuse: FRX60/90 Series

1. Summary

(a) **RoHS Compliant (Lead Free) Product**

(b) **Applications: Telecom and wide variety of electronic equipment.**

(c) **Product Features: Low hold current, Solid state, Radial leaded product ideal for up to 90V_{DC}**

(d) **Operation Current: 0.05A~3.75A**

(e) **Maximum Voltage: Up to 90V_{DC}**

(f) **Temperature Range: -40℃ to 85℃**

2. Agency Recognition

UL: File No. E211981

C-UL: File No. E211981

TÜV: File No. R50004084

3. Electrical Characteristics (23℃)

Part Number	Hold Current	Trip Current	Max. Time to Trip	Max. Current	Rated Voltage	Typ. Power	Resistance	
							R_{MIN}	$R1_{MAX}$
	I_H,A	I_T,A	at 5xI_H,s	I_{MAX},A	V_{MAX},V_{DC}	Pd, W	Ohm	Ohm
FRX005-60F	0.05	0.10	5.0	40	60	0.26	7.30	20.00
FRX010-60F	0.10	0.20	4.0	40	60	0.38	2.50	7.50
FRX017-60F	0.17	0.34	3.0	40	60	0.48	2.00	8.00
FRX020-90F	0.20	0.40	2.2	40	72/90	0.41	1.83	4.40
FRX025-90F	0.25	0.50	2.5	40	72/90	0.45	1.25	3.00
FRX030-90F	0.30	0.60	3.0	40	72/90	0.49	0.88	2.10
FRX035-90F	0.35	0.75	10.0	40	72/90	1.30	0.70	2.50
FRX040-90F	0.40	0.80	3.8	40	72/90	0.56	0.55	1.29
FRX050-90F	0.50	1.00	4.0	40	72/90	0.77	0.50	1.17
FRX055-90F	0.55	1.20	10.0	40	72/90	1.50	0.40	1.50
FRX065-90F	0.65	1.30	5.3	40	72/90	0.88	0.31	0.72
FRX075-90F	0.75	1.50	6.3	40	72/90	0.92	0.25	0.60
FRX090-90F	0.90	1.80	7.2	40	72/90	0.99	0.20	0.47
FRX110-90F	1.10	2.20	8.2	40	72/90	1.50	0.15	0.38
FRX135-90F	1.35	2.70	9.6	40	72/90	1.70	0.12	0.30
FRX160-90F	1.60	3.20	11.4	40	72/90	1.90	0.09	0.22
FRX185-90F	1.85	3.70	12.6	40	72/90	2.10	0.08	0.19
FRX250-90F	2.50	5.00	15.6	40	72/90	2.50	0.05	0.13
FRX300-90F	3.00	6.00	19.8	40	72/90	2.80	0.04	0.10
FRX375-90F	3.75	7.50	24.0	40	72/90	3.20	0.03	0.08

I_H=Hold current-maximum current at which the device will not trip at 23℃ still air.
I_T=Trip current-minimum current at which the device will always trip at 23℃ still air.
I_{MAX}= Maximum fault current device can withstand without damage at rated voltage (V_{MAX}).
V_{MAX}=Maximum voltage device can withstand without damage at its rated current.
Pd=Typical power dissipated from device when in tripped state in 23℃ still air environment.
R_{MIN}=Minimum device resistance at 23℃.
$R1_{MAX}$=Maximum device resistance at 23℃, 1 hour after tripping.
Physical specifications:
Lead material: FRX005-60F~FRX040-90F Tin plated copper clad steel, 24 AWG.
FRX050-90F~FRX090-90F Tin plated copper, 24 AWG.
FRX110-90F~FRX375-90F Tin plated copper, 20 AWG.
Soldering characteristics: MIL-STD-202, Method 208E.
Insulating coating: Flame retardant epoxy, meets UL-94V-0 requirement.

4. Production Dimensions (millimeter)



FRX 005-60F ~ FRX 090-90F

Lead Size: 24AWG

φ 0.51 mm Diameter



FRX 110-90F ~ FRX 375-90F

Lead Size: 20AWG

φ 0.81 mm Diameter

Part Number	A	B	C	D	E	F
	Maximum	Maximum	Typical	Minimum	Maximum	Typical
FRX005-60F	7.4	12.7	5.1	7.6	3.1	1.1
FRX010-60F	7.4	12.7	5.1	7.6	3.1	1.1
FRX017-60F	7.4	12.7	5.1	7.6	3.1	1.1
FRX020-90F	7.4	12.7	5.1	7.6	3.1	1.1
FRX025-90F	7.4	12.7	5.1	7.6	3.1	1.1
FRX030-90F	7.4	12.7	5.1	7.6	3.1	1.1
FRX035-90F	7.4	12.7	5.1	7.6	3.1	1.1
FRX040-90F	7.6	13.5	5.1	7.6	3.1	1.1
FRX050-90F	7.9	13.7	5.1	7.6	3.1	1.1
FRX055-90F	9.7	14.0	5.1	7.6	3.1	1.1
FRX065-90F	9.7	14.5	5.1	7.6	3.1	1.1
FRX075-90F	10.4	15.2	5.1	7.6	3.1	1.1
FRX090-90F	11.7	15.8	5.1	7.6	3.1	1.1
FRX110-90F	13.0	18.0	5.1	7.6	3.1	1.4
FRX135-90F	14.5	19.6	5.1	7.6	3.1	1.4
FRX160-90F	16.3	21.3	5.1	7.6	3.1	1.4
FRX185-90F	17.8	22.9	5.1	7.6	3.1	1.4
FRX250-90F	21.3	26.4	10.2	7.6	3.1	1.4
FRX300-90F	24.9	30.0	10.2	7.6	3.1	1.4
FRX375-90F	28.5	33.5	10.2	7.6	3.1	1.4

5. Thermal Derating Curve

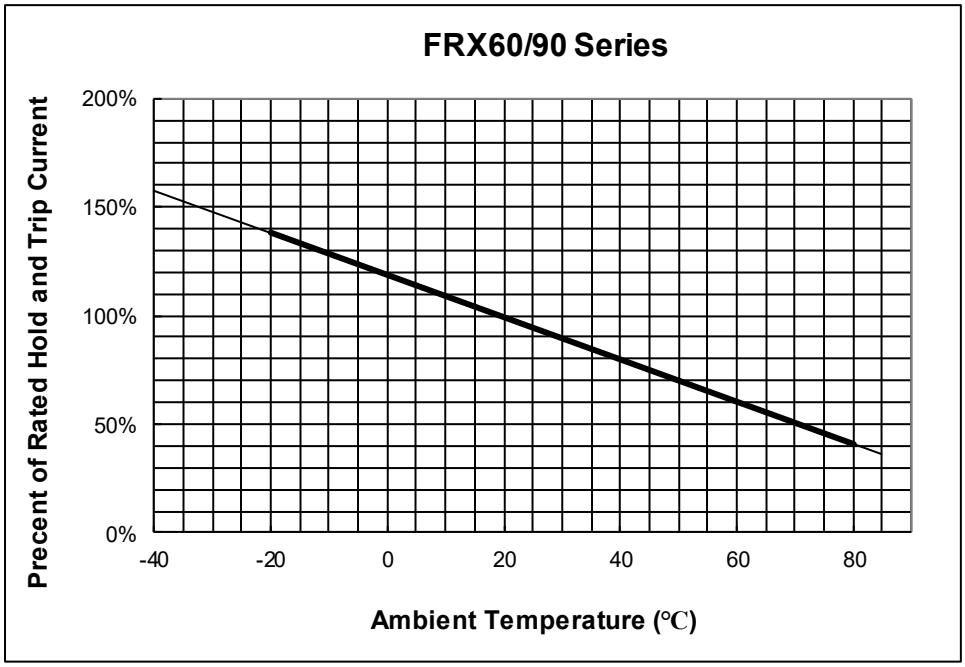

6. Typical Time-To-Trip at 23℃

A =FRX005-60F
B =FRX010-60F
C =FRX017-60F
D =FRX020-90F
E =FRX025-90F
F =FRX030-90F
G =FRX035-90F
H =FRX040-90F
I =FRX050-90F
J =FRX055-90F
K =FRX065-90F
L =FRX075-90F
M =FRX090-90F
N =FRX110-90F
O =FRX135-90F
P =FRX160-90F
Q =FRX185-90F
R =FRX250-90F
S =FRX300-90F
T =FRX375-90F

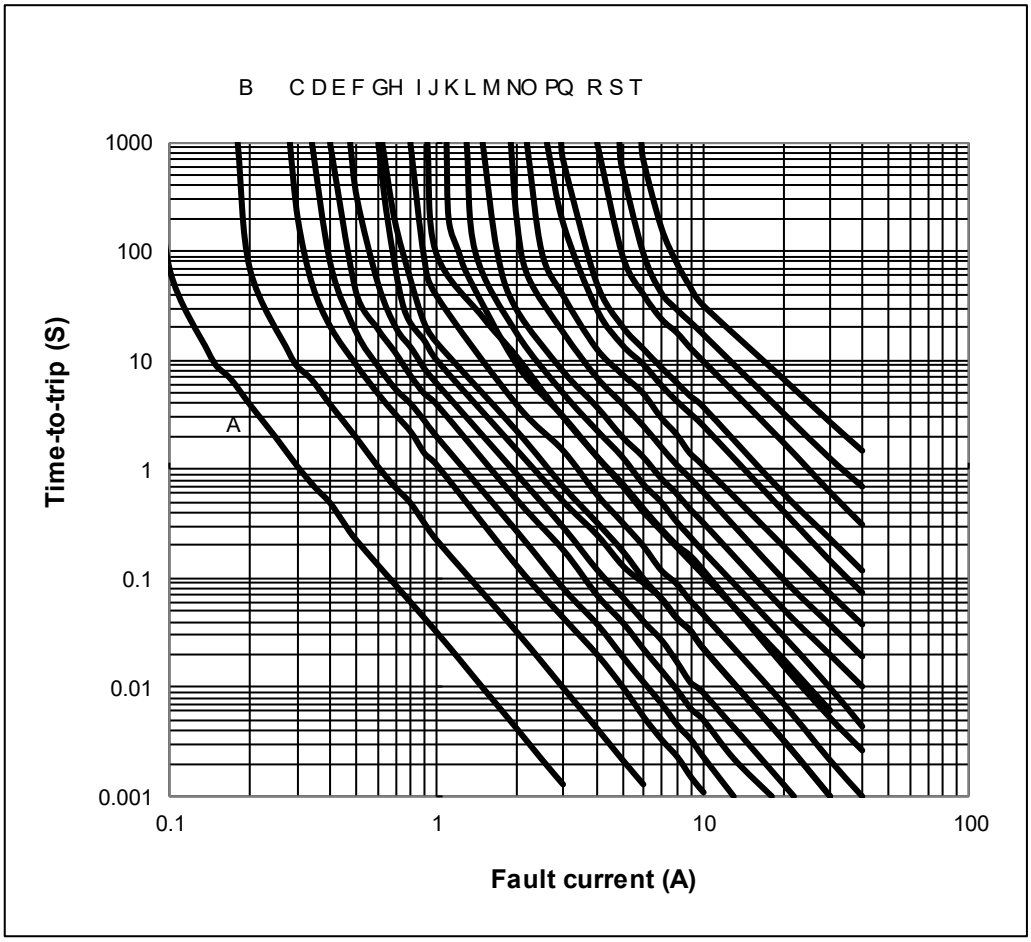

7. Material Specification

Lead material: FRX005-60F~FRX040-90F Tin plated copper clad steel, 24 AWG.
FRX050-90F~FRX090-90F Tin plated copper, 24 AWG.
FRX110-90F~FRX375-90F Tin plated copper, 20 AWG.

Soldering characteristics: MIL-STD-202, Method 208E.

Insulating coating: Flame retardant epoxy, meets UL-94V-0 requirement

8. Part Numbering and Marking System

Part Numbering System

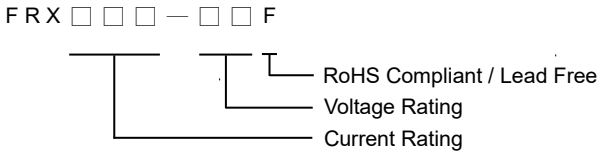

Part Marking System

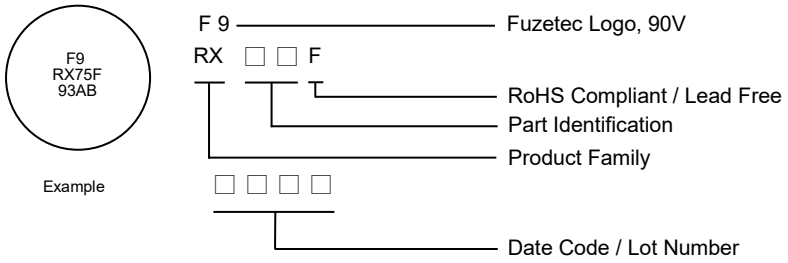

OR

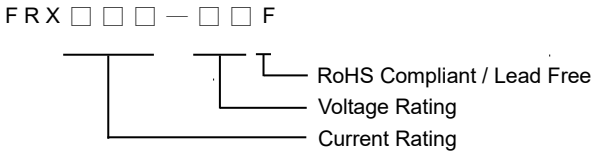

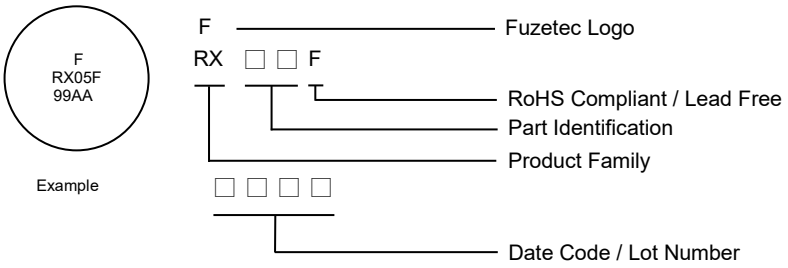

Note: Font on Marking may look slightly different due to fine turnings of each Marking printer.

Warning: - Each product should be carefully evaluated and tested for their suitability of application.

- Operation beyond the specified maximum rating or improper use may result in damage and possible electrical arcing and/or flame.
- PPTC device are intended for occasional overcurrent protection. Application for repeated overcurrent condition and/or prolonged trip are not anticipated.
- Avoid contact of PPTC device with chemical solvent, including some inert material such as silicone based oil, lubricant and etc. Prolonged contact will damage the device performance.
- Additional protection mechanism are strongly recommended to be used in conjunction with the PPTC device for protection against abnormal or failure conditions.
- Avoid use of PPTC device in a constrained space such as potting material, housing and containers where have limited space to accommodate device thermal expansion and/or contraction.

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

- View FRX025-90F on WIN SOURCE
- RFE/Fuzetec Information

Optimize Your Supply Chain with WIN SOURCE Solutions

- Global Sourcing Solution
- Obsolete Management
- Cost Control Management
- Shortage Management
- Alternative Solution
- Excess Inventory Management