




**THE DATASHEET OF  
MM126311**



**SPECIFICATION**

**1. MECHANICAL**

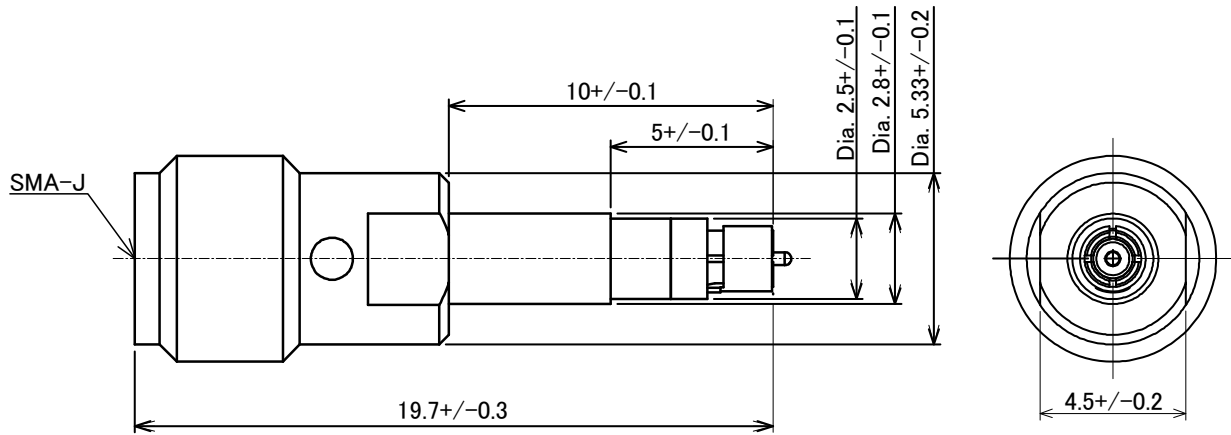

SCALE:FREE  
UNIT: mm

**2. RATING:**

Item	Specification
Voltage Rating	250V r.m.s. maximum
Nominal Frequency Range	DC to 11GHz
Nominal Impedance	50Ω
Temperature Rating	-40°C to +85°C
Insulation Resistance	500 MΩ minimum
Withstanding Voltage	No evidence of breakdown
Initial Contact Resistance (without conductor resistance)	Center contact 70.0mΩmax. Outer contact 20.0mΩmax.
A> Voltage Standing Wave Ratio (V.S.W.R.)	Meet the requirements of following spec. 1.3max. (DC to 3GHz) 1.6max. (3GHz to 6GHz) 2.0max. (6GHz to 11GHz)
A> Insertion loss	0.4dB max. (DC to 3GHz) 0.6dB max. (3GHz to 6GHz) 1.0dB max. (6GHz to 11GHz)
A> Durability	2K cycles
Engage and disengage force. (PROBE side only)	a. Engagement 30N maximum b. Disengagement 5N minimum 35N maximum

## Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

- ⊖ [View MM126311 on WIN SOURCE](#)
- ⊖ [Murata Electronics North America Information](#)

## Optimize Your Supply Chain with WIN SOURCE Solutions

- ✓ Global Sourcing Solution
- ✓ Obsolete Management
- ✓ Cost Control Management
- ✓ Shortage Management
- ✓ Alternative Solution
- ✓ Excess Inventory Management