



**THE DATASHEET OF
MM126525**





Preliminary Specification of COAXIAL CONNECTOR
 Preliminary SPEC No. : NMM04-PU0049A
 Part Number : MM126525


Written by H.Matsukawa
 Checked by M.Atokawa
 Date 05/Aug./2014
 Revised A:14/Jan./14 MA

SPECIFICATION

1. MECHANICAL

This probe MM126525 is needed to measure Antenna side performance for manual measurement.

A>

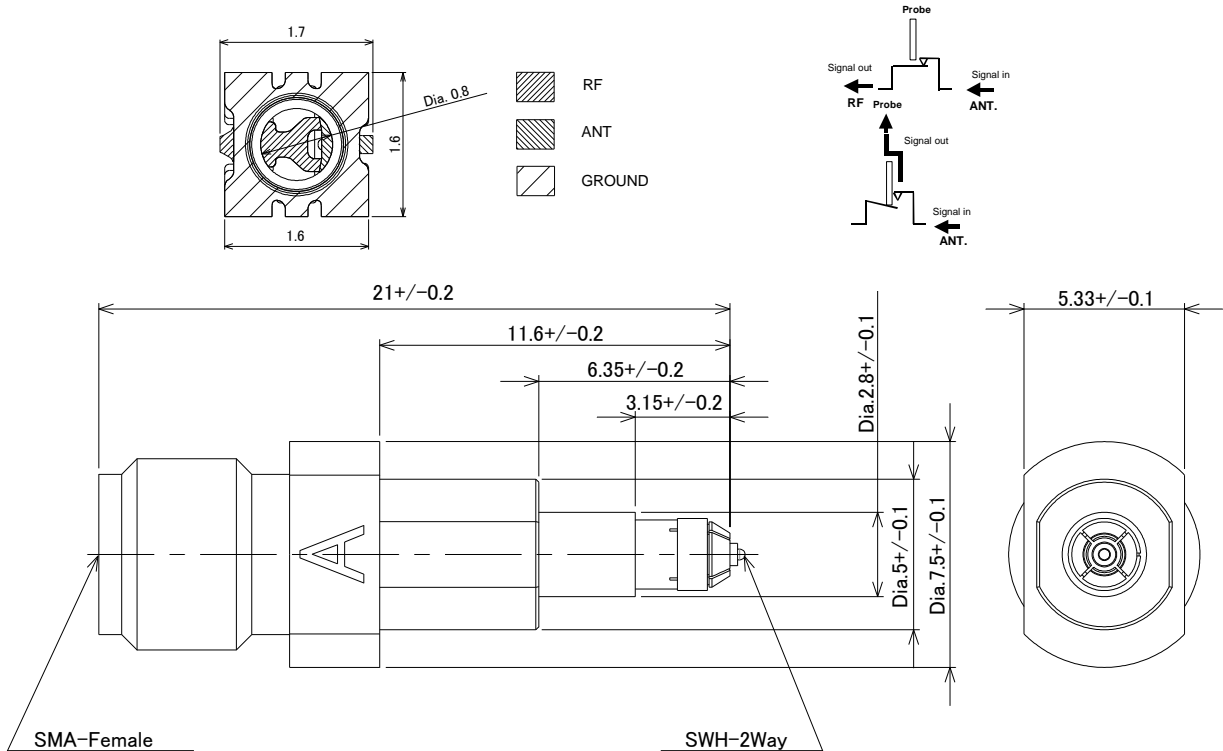

Scale: Free
 Tolerances Unless
 Otherwise Specified: +/-0.2
 Unit: mm

Figure.1 Construction

2. RATING:

Item	Specification
Voltage Rating	30V r.m.s. maximum
Nominal Frequency Range	DC to 6GHz
Nominal Impedance	50Ω
Temperature Rating	-40°C to +85°C
Insulation Resistance	500 MΩ minimum
Withstanding Voltage	No evidence of breakdown
Initial Contact Resistance (without conductor resistance)	70 m Ω max.
Voltage Standing Wave Ratio (V.S.W.R.)	Meet the requirements of following spec. 1.5 max. (DC ~3GHz) 1.6 max. (3GHz ~6GHz)
Insertion loss	0.5dB max. (DC ~3GHz) 0.9dB max. (3GHz ~6GHz)
Durability	2K cycles
Engage and disengage force. (Probe side only)	a. Engagement 30N maximum b. Disengagement 5N minimum 20 N maximum

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

- [View MM126525 on WIN SOURCE](#)
- [Murata Electronics North America Information](#)

Optimize Your Supply Chain with WIN SOURCE Solutions

- ✓ Global Sourcing Solution
- ✓ Obsolete Management
- ✓ Cost Control Management
- ✓ Shortage Management
- ✓ Alternative Solution
- ✓ Excess Inventory Management