





# THE DATASHEET OF EJ508A






AYOUT

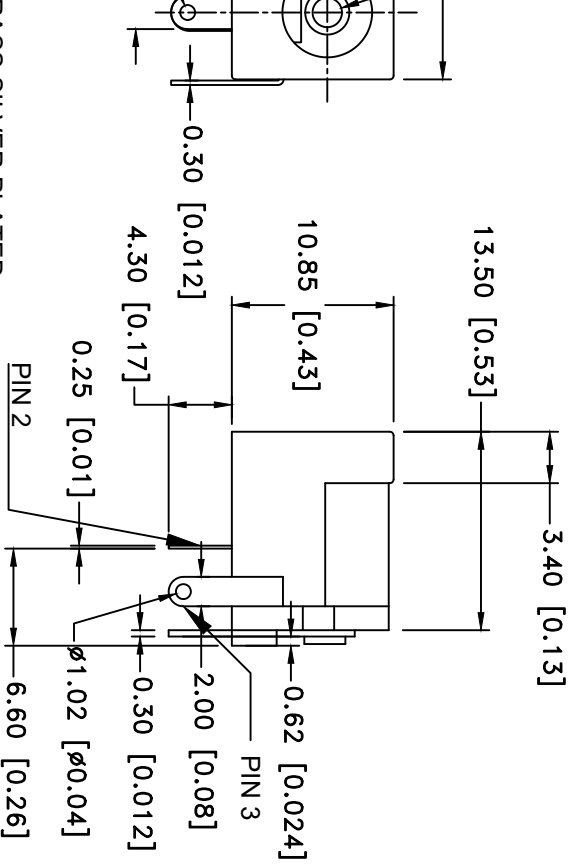


BRASS SILVER PLATED  
PHOSPHOR BRONZE  
T BRASS


Date	SYM	REVISION	RECORD	AUTH	DR.	CK.
07/14/16	G	UPDATED	LEFT SIDE VIEW	T.B.	B.S.	
11/04/16	H	ADDED	PIN NUMBER	T.B.	B.S.	
08/14/18	J	PIN MATERIAL WAS COPPER		T.B.	B.S.	
3/18/24	K	ADDED	UL FILE NUMBER	D.L.	B.S.	



**SCHEMATIC**

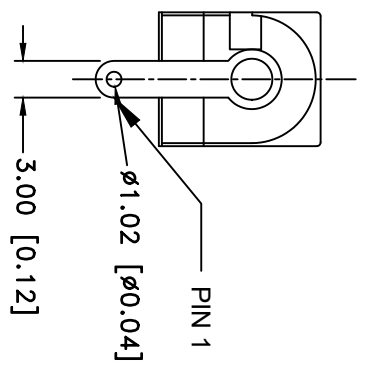



MINIMUM WITHDRAWAL CYCLE  
E: 50mU MAXIMUM  
NCE: 1000mU MINIMUM  
NDING VOLTAGE: 500AC MAXIMUM  
12V DC  
G: -15°C TO 90°C

Tolerance (Except as noted)		 <b>Memory Protection Devices, Inc</b> 200 Broad Hollow Road, Farmingdale, New York 11735	
decimal	±.5 (.020)	Scale	Drawn By B.S. Approved By D.L.
Fractional	±.8 (.030)	Title	DC JACK – PCB MOUNTING 2.1 I.D. x 5.5 O.D.
Angular	± 3°	Date	3/18/24
		Drawing Number	EJ508A

## Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

-  [View EJ508A on WIN SOURCE](#)
-  [MPD \(Memory Protection Devices\) Information](#)

## Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management