





**THE DATASHEET OF  
DS1833Z-10+**



## FEATURES

- Automatically restarts microprocessor after power failure
- Maintains active-high reset for 350 ms after  $V_{CC}$  returns to an in-tolerance condition
- Accurate 5%, 10% or 15% microprocessor 5V power supply monitoring
- Reduces need for discrete components
- Precision temperature-compensated voltage reference and voltage sensor
- Low-cost TO-92 package or surface mount SOT-223 package
- Internal 5k pull-up resistor
- Operating temperature of  $-40^{\circ}\text{C}$  to  $+85^{\circ}\text{C}$

## PIN ASSIGNMENT



TOP VIEW  
SOT-23 PACKAGE  
See Mech.  
Drawings Section  
On Website



BOTTOM VIEW  
TO-92 PACKAGE  
See Mech.  
Drawings Section  
On Website

## PIN DESCRIPTION

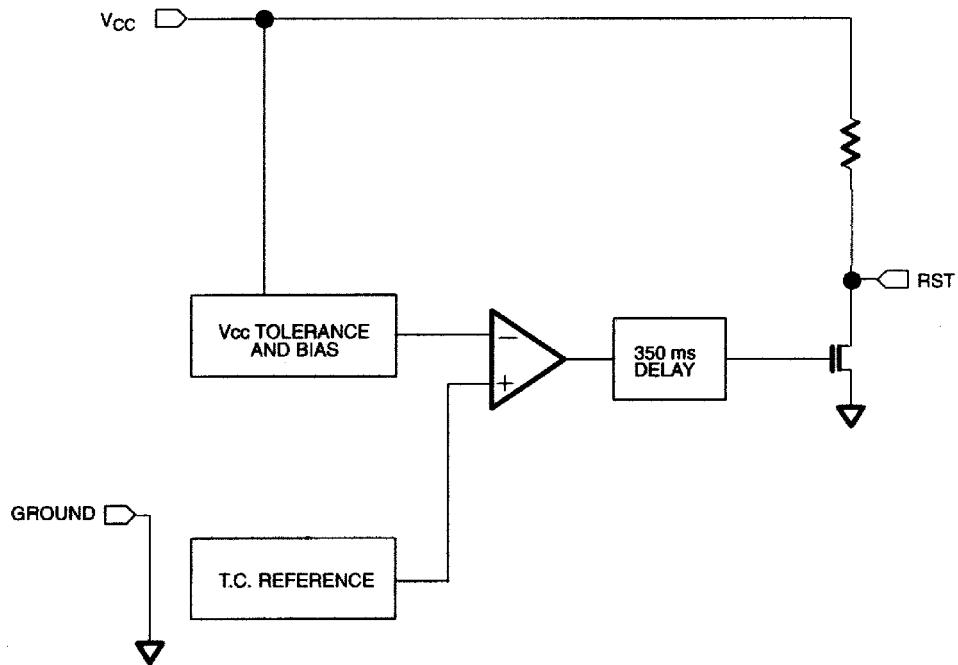
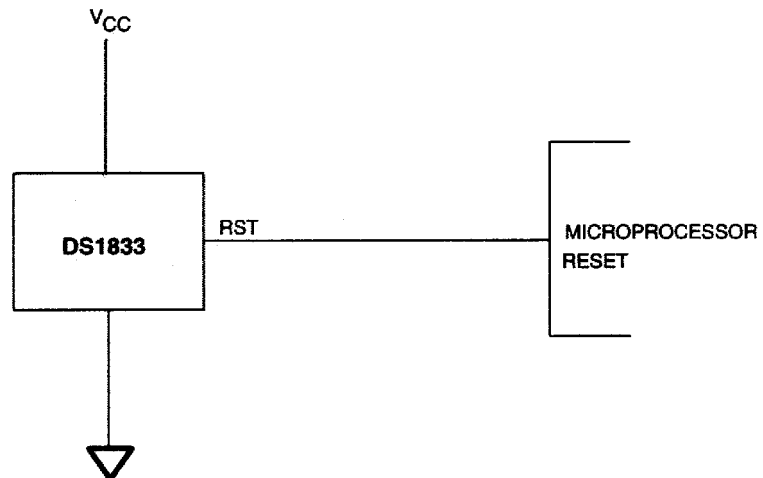
|       |                       |
|-------|-----------------------|
| PIN 1 | Ground                |
| PIN 2 | Reset                 |
| PIN 3 | $V_{CC}$              |
| PIN 4 | Ground (SOT-223 only) |

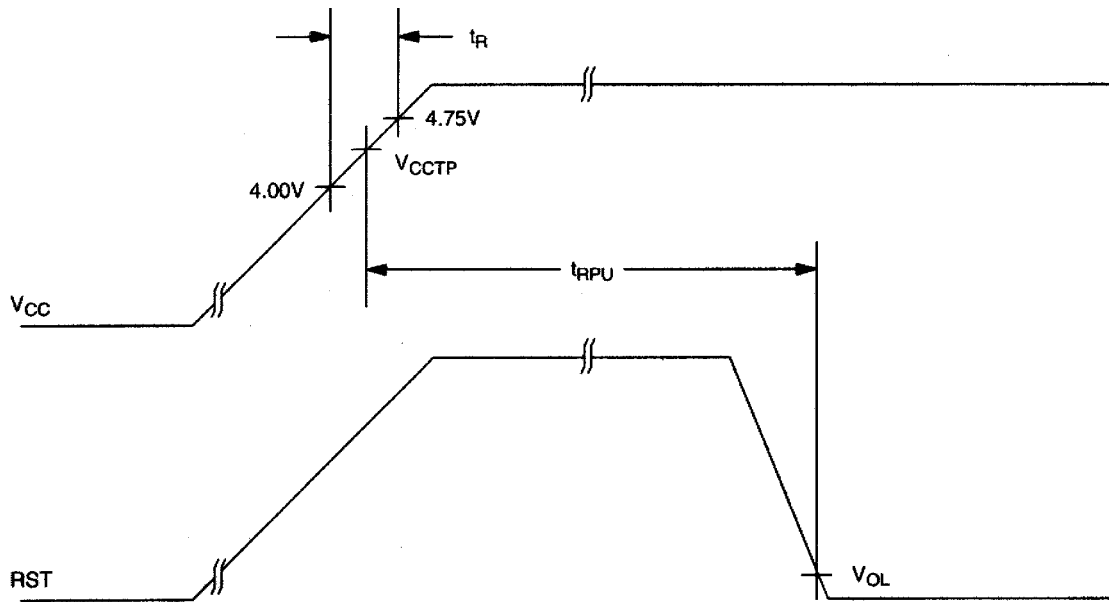
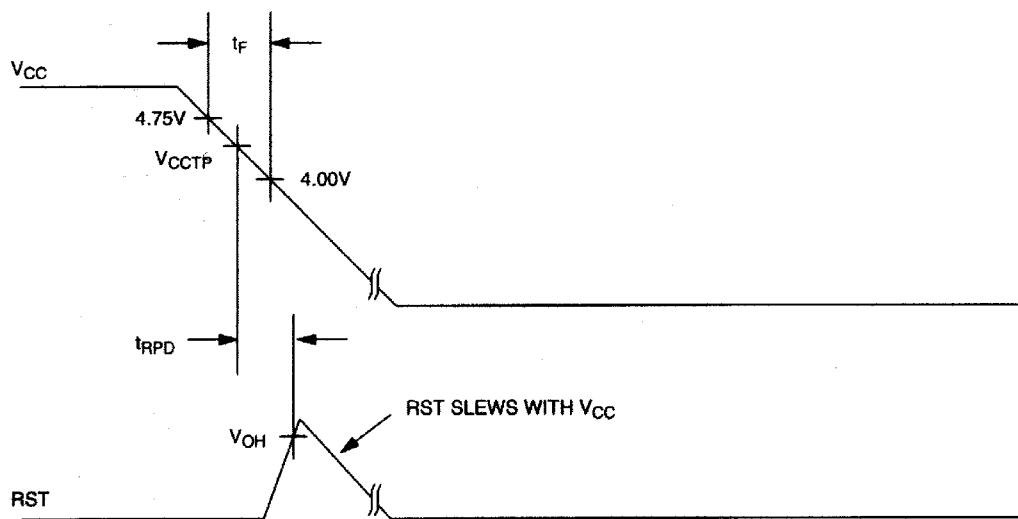
## DESCRIPTION

The DS1833 EconoReset uses a precision temperature compensated reference and comparator circuit to monitor the status of the power supply ( $V_{CC}$ ). When an out-of-tolerance condition is detected, an internal power fail signal is generated which forces reset to the active (high) state. When  $V_{CC}$  returns to an in-tolerance condition, the reset signal is kept in the active state for approximately 350 ms to allow the power supply and processor to stabilize.

## OPERATION - POWER MONITOR

The DS1833 provides the functions of detecting out-of-tolerance power supply conditions and warning a processor-based system of impending power failure. When  $V_{CC}$  is detected as out-of-tolerance, as defined by the tolerance of the part selected, the RST signal is asserted. On power-up, RST is kept active for approximately 350 ms after the power supply has reached the selected tolerance. This allows the power supply and microprocessor to stabilize before RST is released.

**BLOCK DIAGRAM Figure 1****APPLICATION EXAMPLE Figure 2**

**POWER-UP Figure 3****POWER-DOWN Figure 4**

**ABSOLUTE MAXIMUM RATINGS\***

|   |                                |
|---|--------------------------------|
| Voltage on V <sub>CC</sub> Pin Relative to Ground | -0.5V to +7.0V                 |
| Voltage on I/O Relative to Ground                 | -0.5V to V <sub>CC</sub> +0.5V |
| Operating Temperature                             | -40°C to +85°C                 |
| Storage Temperature                               | -55°C to +125°C                |
| Soldering Temperature                             | 260°C for 10 seconds           |

\* This is a stress rating only and functional operation of the device at these or any other conditions above those indicated in the operation sections of this specification is not implied. Exposure to absolute maximum rating conditions for extended periods of time may affect reliability.

**RECOMMENDED DC OPERATING CONDITIONS** (-40°C to +85°C)

| PARAMETER      | SYMBOL          | MIN | TYP | MAX | UNITS | NOTES |
|----------------|-----------------|-----|-----|-----|-------|-------|
| Supply Voltage | V <sub>CC</sub> | 1.2 | 5.0 | 5.5 | V     | 1     |

**DC ELECTRICAL CHARACTERISTICS** (-40°C to +85°C; V<sub>DD</sub>=5V ± 10%)

| PARAMETER                      | SYMBOL             | MIN  | TYP   | MAX  | UNITS | NOTES |
|--------------------------------|--------------------|------|-------|------|-------|-------|
| Low Level @ RST                | V <sub>OL</sub>    |      |       | 0.4  | V     | 1     |
| Output Current @ 0.4V          | I <sub>OL</sub>    | +8   |       |      | mA    |       |
| Operating Current              | I <sub>CC</sub>    |      | 1.5   | 2    | mA    |       |
| V <sub>CC</sub> Trip Point 5%  | V <sub>CCTP1</sub> | 4.5  | 4.625 | 4.74 | V     | 1     |
| V <sub>CC</sub> Trip Point 10% | V <sub>CCTP2</sub> | 4.25 | 4.375 | 4.49 | V     | 1     |
| V <sub>CC</sub> Trip Point 15% | V <sub>CCTP3</sub> | 4.0  | 4.125 | 4.24 | V     | 1     |
| Output Capacitance             | C <sub>OUT</sub>   |      |       | 10   | pF    |       |
| Internal Pull-Up Resistor      | R <sub>P</sub>     | 3.75 | 5     | 6.25 | kΩ    |       |

**AC ELECTRICAL CHARACTERISTICS** (-40°C to +85°C; V<sub>CC</sub>=5V ± 10%)

| PARAMETER                                 | SYMBOL           | MIN | TYP | MAX | UNITS | NOTES |
|---|------------------|-----|-----|-----|-------|-------|
| Reset Active Time                         | t <sub>RST</sub> | 250 | 350 | 450 | ms    |       |
| V <sub>CC</sub> Detect to RST             | t <sub>RPD</sub> |     |     | 100 | ns    |       |
| V <sub>CC</sub> Slew Rate (4.75V - 4.00V) | t <sub>F</sub>   | 300 |     |     | μs    |       |
| V <sub>CC</sub> Slew Rate (4.00V - 4.75V) | t <sub>R</sub>   | 0   |     |     | ns    |       |
| V <sub>CC</sub> Detect to RST             | t <sub>RPU</sub> | 250 | 350 | 450 | ms    |       |

**NOTES:**



1. All voltages are referenced to ground.

**ECONORESET SELECTION GUIDE**

|             |            | VCC TRIP POINT |       |      | PUSHBUTTON DETECT |     |     |
|-------------|------------|----------------|-------|------|-------------------|-----|-----|
|             |            | MIN            | TYP   | MAX  | MIN               | TYP | MAX |
| <b>5V</b>   | DS1233-15  | 4.0            | 4.125 | 4.24 | 2.4               | -   | 3.3 |
|             | DS1233-10  | 4.25           | 4.375 | 4.49 | 2.4               | -   | 3.3 |
|             | DS1233-5   | 4.5            | 4.625 | 4.75 | 2.4               | -   | 3.3 |
|             | DS1233D-15 | 4.0            | 4.125 | 4.24 | N/A               |     | N/A |
|             | DS1233D-10 | 4.25           | 4.375 | 4.49 | N/A               |     | N/A |
|             | DS1233D-5  | 4.5            | 4.625 | 4.75 | N/A               |     | N/A |
|             | DS1833-15  | 4.0            | 4.125 | 4.24 | N/A               |     | N/A |
|             | DS1833-10  | 4.25           | 4.375 | 4.49 | N/A               |     | N/A |
|             | DS1833-5   | 4.5            | 4.625 | 4.75 | N/A               |     | N/A |
| <b>3.3V</b> | DS1233A-15 | 2.64           | 2.72  | 2.80 | 1.8               | -   | 3.0 |
|             | DS1233A-10 | 2.8            | 2.88  | 2.97 | 1.8               | -   | 3.0 |

## Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

-  [View DS1833Z-10+](#) on WIN SOURCE
-  [Maxim Integrated](#) Information

## Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management