



**THE DATASHEET OF
UUG1H471MNQ6MS**



ALUMINUM ELECTROLYTIC CAPACITORS


UUG

Chip Type, Higher Capacitance Range



For SMD

- Chip Type, higher capacitance in larger case sizes (φ12.5, φ16, φ18)
- Designed for surface mounting on high density PC board.
- Applicable to automatic mounting machine fed with carrier tape.
- Compliant to the RoHS directive (2011/65/EU,(EU)2015/863).
- AEC-Q200 Qualified. Please contact us for details.




Valued marked with an ※ in the dimension table are scheduled to be discontinued and are not recommended for new designs.

Specifications


Item	Performance Characteristics													
Category Temperature Range	-40 to +85°C													
Rated Voltage Range	6.3 to 450V													
Rated Capacitance Range	4.7 to 10000μF													
Capacitance Tolerance	±20% at 120Hz, 20°C													
Leakage Current ※	Rated voltage (V)	6.3 to 100						160 to 450						
	—	After 1 minute's application of rated voltage at 20°C, leakage current is not more than 0.03CV(μA).										I = 0.04CV+100 (μA) max. (1 minute's at 20°C)		
Tangent of loss angle (tan δ)	Measurement frequency : 120Hz at 20°C													
	Rated voltage (V)	6.3	10	16	25	35	50	63	100	160 to 250	400 · 450			
	tan δ (max.)	0.28	0.24	0.20	0.16	0.14	0.12	0.10	0.08	0.20	0.25			
For capacitance of more than 1000μF, add 0.02 for every increase of 1000μF. (φ12.5 to φ18)														
Stability at Low Temperature	Measurement frequency: 120Hz													
	Rated voltage (V)	6.3	10	16	25	35	50	63	100	160 to 250	400 · 450			
	Impedance ratio (max.)	Z(-25°C) / Z(+20°C)	5	4	3	2	2	2	2	2	3	6		
Endurance	The specifications listed at right shall be met when the capacitors are restored to 20°C after the rated voltage is applied for 2000 hours at 85°C.										Capacitance change		Within ±20% of the initial capacitance value	
											tan δ		200% or less than the initial specified value	
Shelf Life	After storing the capacitors under no load at 85°C for 1000 hours and then performing voltage treatment based on JIS C 5101-4 clause 4.1 at 20°C, they shall meet the specified values for the endurance characteristics listed above.										Leakage current		Less than or equal to the initial specified value	
Marking	Black print on the case top.													

※ I : Leakage Current (μA), C : Rated Capacitance (μF), V : Rated Voltage (V)

Chip Type

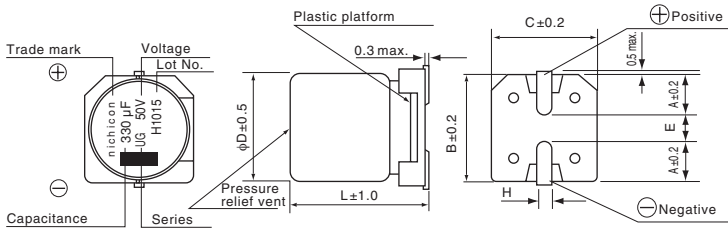

Type numbering system (Example : 50V 330μF)

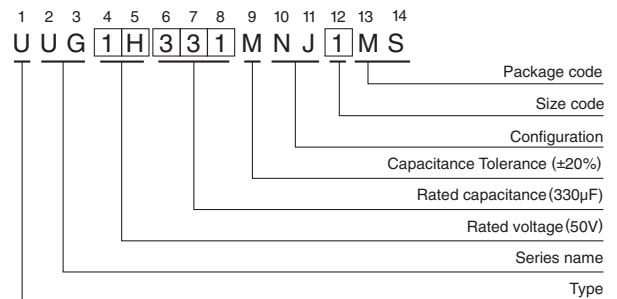

※ There are also some products that can be manufactured as vibration resistant products.

	(mm)							
φD	12.5×13.5	12.5×16	12.5×21	16×16.5	16×21.5	18×16.5	18×21.5	
A	5.15	5.15	5.15	5.65	5.65	6.65	6.65	
B	13.6	13.6	13.6	17.1	17.1	19.1	19.1	
C	13.6	13.6	13.6	17.1	17.1	19.1	19.1	
E	(3.3)	(3.3)	(3.3)	(5.8)	(5.8)	(5.8)	(5.8)	
L	13.5	16.0	21.0	16.5	21.5	16.5	21.5	
H	1.0 to 1.4	1.0 to 1.4	1.0 to 1.4	1.0 to 1.4	1.0 to 1.4	1.0 to 1.4	1.0 to 1.4	

Please contact us for the dimensions for NQ.

Frequency coefficient of rated ripple current

V	Frequency					
	Cap.(μF)	50Hz	120Hz	300Hz	1kHz	10kHz or more
6.3 to 100	68	0.75	1.00	1.35	1.57	2.00
	100 to 470	0.80	1.00	1.23	1.34	1.50
	1000 to 10000	0.85	1.00	1.10	1.13	1.15
160 to 450	4.7 to 100	0.80	1.00	1.25	1.40	1.60

● Dimension table in next page.

UUG

■ Dimensions

Rated Voltage (V) (code)	Rated Capacitance (μF)	Case Size φD×L (mm)	tan δ	Leakage Current (μA) (at 20°C after 1 minute)	Rated Ripple (mArms) (85°C/120Hz)	Part Number
6.3 (0J)	2200	12.5×16	0.30	415.8	890	※UUG0J222MNJ1MS
	3300	16×16.5	0.32	623.7	1200	※UUG0J332MNJ1MS
	3300	12.5×21	0.32	623.7	1200	※UUG0J332MNJ6MS
	4700	16×16.5	0.34	888.3	1400	※UUG0J472MNJ1MS
	6800	18×16.5	0.38	1285.2	1650	※UUG0J682MNJ1MS
	6800	16×21.5	0.38	1285.2	1650	※UUG0J682MNJ6MS
	10000	18×21.5	0.46	1890	2000	※UUG0J103MNJ1MS
10 (1A)	1000	12.5×13.5	0.24	300	620	UUG1A102MNJ1MS
	2200	12.5×16	0.26	660	960	UUG1A222MNJ1MS
	3300	16×16.5	0.28	990	1300	UUG1A332MNJ1MS
	4700	18×16.5	0.30	1410	1500	UUG1A472MNJ1MS
	4700	16×21.5	0.30	1410	1500	UUG1A472MNJ6MS
	6800	18×21.5	0.34	2040	1850	UUG1A682MNJ1MS
	10000	18×21.5	0.42	3000	2200	UUG1A103MNJ6MS
16 (1C)	1000	12.5×13.5	0.20	480	710	UUG1C102MNJ1MS
	2200	16×16.5	0.22	1056	1150	UUG1C222MNJ1MS
	2200	12.5×21	0.22	1056	1150	UUG1C222MNJ6MS
	3300	18×16.5	0.24	1584	1450	UUG1C332MNJ1MS
	3300	16×21.5	0.24	1584	1450	UUG1C332MNJ6MS
	4700	18×21.5	0.26	2256	1750	UUG1C472MNJ1MS
25 (1E)	470	12.5×13.5	0.16	352.5	550	UUG1E471MNJ1MS
	1000	12.5×16	0.16	750	820	UUG1E102MNJ1MS
	2200	18×16.5	0.18	1650	1350	UUG1E222MNJ1MS
	2200	16×21.5	0.18	1650	1350	UUG1E222MNJ6MS
	3300	18×21.5	0.20	2475	1700	UUG1E332MNJ1MS
35 (1V)	470	12.5×13.5	0.14	493.5	580	UUG1V471MNJ1MS
	1000	16×16.5	0.14	1050	1000	UUG1V102MNJ1MS
	1000	12.5×21	0.14	1050	1000	UUG1V102MNJ6MS
	2200	18×21.5	0.16	2310	1550	UUG1V222MNJ1MS
50 (1H)	220	12.5×13.5	0.12	330	450	UUG1H221MNJ1MS
	330	12.5×13.5	0.12	495	520	UUG1H331MNJ1MS
	470	16×16.5	0.12	705	740	UUG1H471MNJ1MS
	470	12.5×21	0.12	705	740	UUG1H471MNJ6MS
	1000	18×21.5	0.12	1500	1150	UUG1H102MNJ1MS
63 (1J)	100	12.5×13.5	0.10	189	370	UUG1J101MNJ1MS
	220	12.5×16	0.10	415.8	580	UUG1J221MNJ1MS
	330	16×16.5	0.10	623.7	680	UUG1J331MNJ1MS
	330	12.5×21	0.10	623.7	680	UUG1J331MNJ6MS
	470	18×16.5	0.10	888.3	850	UUG1J471MNJ1MS
	470	16×21.5	0.10	888.3	850	UUG1J471MNJ6MS
100 (2A)	68	12.5×13.5	0.08	204	350	UUG2A680MNJ1MS
	100	12.5×16	0.08	300	440	UUG2A101MNJ1MS
	220	18×16.5	0.08	660	665	UUG2A221MNJ1MS
	220	16×21.5	0.08	660	665	UUG2A221MNJ6MS
	330	18×21.5	0.08	990	825	UUG2A331MNJ1MS

UUG

■ Dimensions

Rated Voltage (V) (code)	Rated Capacitance (μF)	Case Size φD×L (mm)	tan δ	Leakage Current (μA) (at 20°C after 1 minute)	Rated Ripple (mArms) (85°C/120Hz)	Part Number
160 (2C)	47	12.5×16	0.20	400.8	370	※UUG2C470MNJ1MS
	68	16×16.5	0.20	535.2	500	※UUG2C680MNJ1MS
	68	12.5×21	0.20	535.2	500	※UUG2C680MNJ6MS
	100	18×16.5	0.20	740	590	※UUG2C101MNJ1MS
	100	16×21.5	0.20	740	590	※UUG2C101MNJ6MS
200 (2D)	22	12.5×13.5	0.20	276	235	※UUG2D220MNJ1MS
	33	12.5×16	0.20	364	310	※UUG2D330MNJ1MS
	47	16×16.5	0.20	476	415	※UUG2D470MNJ1MS
	47	12.5×21	0.20	476	415	※UUG2D470MNJ6MS
	68	18×16.5	0.20	644	505	※UUG2D680MNJ1MS
	68	16×21.5	0.20	644	505	※UUG2D680MNJ6MS
	100	18×21.5	0.20	900	590	※UUG2D101MNJ1MS
250 (2E)	10	12.5×13.5	0.20	200	150	※UUG2E100MNJ1MS
	22	12.5×16	0.20	320	240	※UUG2E220MNJ1MS
	33	16×16.5	0.20	430	340	※UUG2E330MNJ1MS
	33	12.5×21	0.20	430	340	※UUG2E330MNJ6MS
	47	18×16.5	0.20	570	415	※UUG2E470MNJ1MS
	47	16×21.5	0.20	570	415	※UUG2E470MNJ6MS
	68	18×21.5	0.20	780	490	※UUG2E680MNJ1MS
400 (2G)	4.7	12.5×13.5	0.25	175.2	115	※UUG2G4R7MNJ1MS
	10	16×16.5	0.25	260	140	※UUG2G100MNJ1MS
	10	12.5×21	0.25	260	140	※UUG2G100MNJ6MS
	22	18×16.5	0.25	452	280	※UUG2G220MNJ1MS
	22	16×21.5	0.25	452	280	※UUG2G220MNJ6MS
	33	18×21.5	0.25	628	350	※UUG2G330MNJ1MS
	47	18×21.5	0.25	852	430	※UUG2G470MNJ6MS
450 (2W)	4.7	12.5×13.5	0.25	184.6	115	※UUG2W4R7MNJ1MS
	10	16×16.5	0.25	280	140	※UUG2W100MNJ1MS
	10	12.5×21	0.25	280	140	※UUG2W100MNJ6MS
	22	16×21.5	0.25	496	275	※UUG2W220MNJ1MS
	33	18×21.5	0.25	694	345	※UUG2W330MNJ1MS

- For taping specifications, recommended land size/soldering by reflow and minimum order quantity, please refer to the Guidelines for Aluminum Electrolytic Capacitors.

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

- ⊖ [View UUG1H471MNQ6MS on WIN SOURCE](#)
- ⊖ [Nichicon Information](#)

Optimize Your Supply Chain with WIN SOURCE Solutions

- ✓ Global Sourcing Solution
- ✓ Obsolete Management
- ✓ Cost Control Management
- ✓ Shortage Management
- ✓ Alternative Solution
- ✓ Excess Inventory Management