



**THE DATASHEET OF**  
**3518P**



# FUSE CLIPS

**Underwriters Laboratories, Inc.**  
**Recognized Component Program –**  
**UL File Number E354010**



UL file number E354010 has been assigned to Keystone Electronics' fuse clips and holders with end stops. (Refer to pages 44-47) Indicating recognition by Underwriters Laboratories Inc. that they are in compliance with their component program.

- Available for 5mm, 1AG, 2AG, 3AG, 5AG, 7AG & 8AG sizes
- Low profile, space saving
- Low contact resistance
- Withstands shock and vibration
- Rated 6.3 to 30 Amps
- Custom designs and modifications available to your specifications

## PC THRU MOUNT TYPES


- Snap-fit design enhances assembly and PC retention for wave soldering
- Available with orientation legs to assure proper PC installation
- Available with or without end stops

## SURFACE MOUNT & RIVET TYPES

- Available with solder lugs or quick-fit tabs .187 (4.7), .205 (5.2)


Refer to pages 48-51 for Fuse Clip Layout and Mounting Details

### 5mm PC Clips



**MATERIAL:**  
 .020 (.51) Brass, Tin Plate  
**UL Current Rating:** 15 Amps

CAT. NO.	A	B
3517	.060 (1.5)	.060 (1.5)
3518P	.060 (1.5)	.093 (2.4)




**With or Without Orientation Legs**  
 Optional cover available - Cat. No. 3517C



• With snap-in PC legs  
**MATERIAL:**  
 .020 (.51) Brass, Tin Plate  
**UL Current Rating:** 15 Amps

CAT. NO.	A	B
3512	.060 (1.5)	.060 (1.5)
3512P	.060 (1.5)	.093 (2.4)

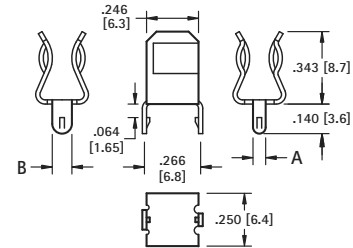


**With or Without Orientation Legs**  
 Optional cover available - Cat. No. 3517C





**MATERIAL:**  
 .016 (.41) Brass, Tin Plate  
**UL Current Rating:** 6.3 Amps

**CAT. NO. 3520**



**MATERIAL:**  
 .016 (.41) Brass, Tin Plate  
**UL Current Rating:** 15 Amps

**CAT. NO. 3519**



FUSE CLIPS



### 2AG or 5mm



**MATERIAL:** .016 (.41) Brass, Tin Plate  
**UL Current Rating:** 15 Amps

CAT. NO.	ON TAPE BULK	ON TAPE & REEL	PC LEGS	END STOP
3521	—	—	YES	YES
3621	—	—	YES	NO*
3561	3561TR	—	NO	YES
3622	3622TR	—	NO	NO*

**Tape & Reel Specs:** 16m wide, 12mm pitch, 13 inch reel (500 pieces per reel)





### 5mm/3AG



**MATERIAL:**  
 .016 (.41) Brass, Tin Plate  
**UL Current Rating:** 15 Amps

**CAT. NO. 3562**




### 4AG (9/32 Dia.)



**MATERIAL:**  
 .020 (.51) Brass, Nickel Plate  
**Current Rating:** 15 Amps

**CAT. NO. 3565 (Without End Stops)\***





### 5AG (13/32 Dia.) - Solar Protection Fuse



**MATERIAL:**  
 .030 (.76) Brass, Tin Plate  
**UL Current Rating:** 30 Amps



**CAT. NO. 3566**



\*Fuse clips without end stops are not UL recognized

## Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

-  [View 3518P](#) on WIN SOURCE
-  [Keystone Electronics](#) Information

## Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management