




THE DATASHEET OF
5305



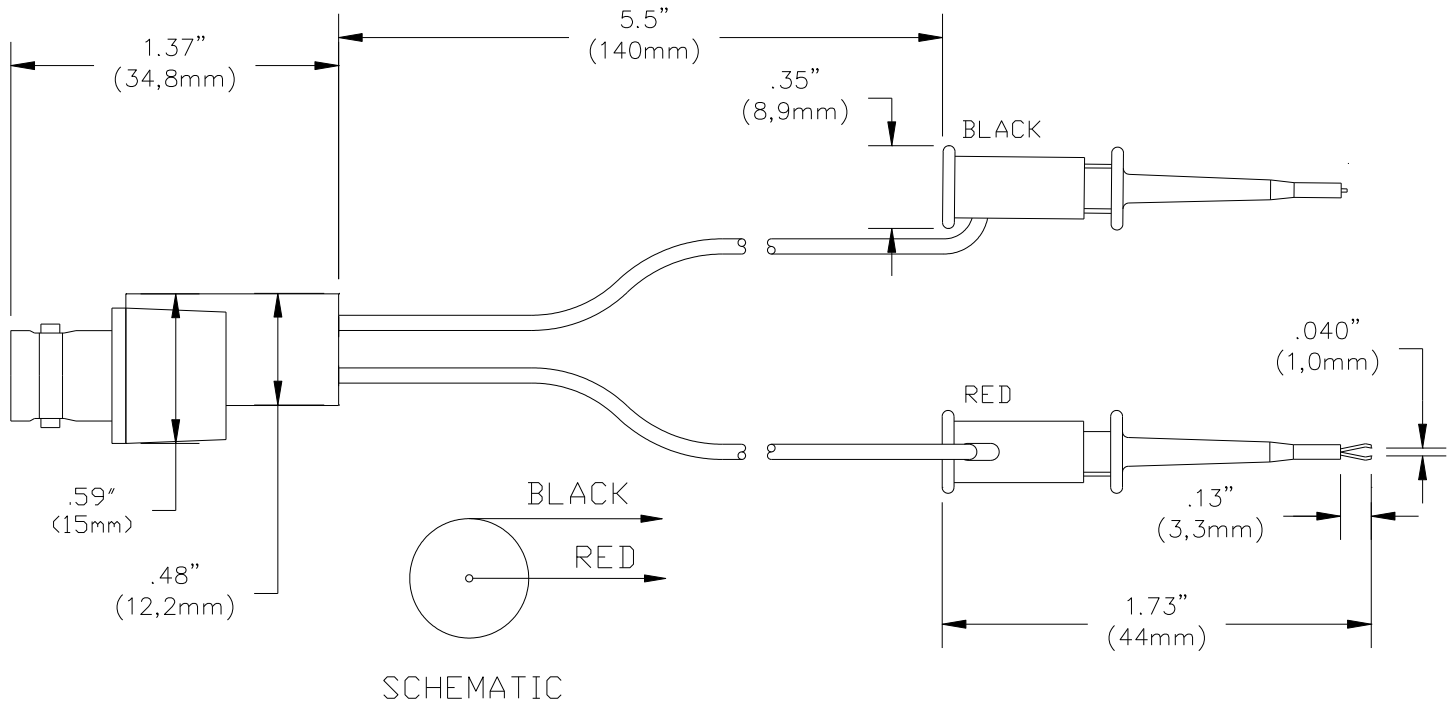

FEATURES:

- ✓ Converts BNC (male) cables / connectors to SMD test clips for test versatility.
- ✓ Grabber pincer and BNC center contact are gold plated excellent corrosion resistance and low contact resistance to ensure test signal integrity.
- ✓ BNC connector is molded directly to the wire for pull strength durability and dust and moisture resistance.
- ✓ SMD clips attach to terminals up to .040" (1,0mm) diameter.
- ✓ Black wire is connected to BNC shell, red wire to BNC center contact.

MATERIALS:

BNC: Nickel Plated Brass, Center Contact: Gold Plated Beryllium Copper

Dielectric: PTFE

Wire: 22 AWG, PVC Insulated

Grabber Pincer: Stainless Steel, Gold Plated, Spring: Stainless Steel

Insulation: Glass Filled Nylon, color matches color of wire

RATINGS:

Operating Voltage: Hands free testing in controlled voltage environments: 150 VRMS Max.

Operating Temperature: +131°F (+55°C) Max.

ORDERING INFORMATION: Model 5305*

* Custom lengths are available, contact Pomona Product Support at: 1-800-241-2060

All dimensions are in inches. Tolerances (except noted): .xx = ±.02" (.51 mm), .xxx = ±.005" (.127 mm).

All specifications are to the latest revisions. Specifications are subject to change without notice.

Registered trademarks are the property of their respective companies.

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

- ⊖ [View 5305 on WIN SOURCE](#)
- ⊖ [Pomona Electronics Information](#)

Optimize Your Supply Chain with WIN SOURCE Solutions

- ✓ Global Sourcing Solution
- ✓ Obsolete Management
- ✓ Cost Control Management
- ✓ Shortage Management
- ✓ Alternative Solution
- ✓ Excess Inventory Management