




THE DATASHEET OF
750314839



CUSTOMER TERMINAL	RoHS	LEAD(Pb)-FREE
Sn96%, Ag4%	Yes	Yes

66


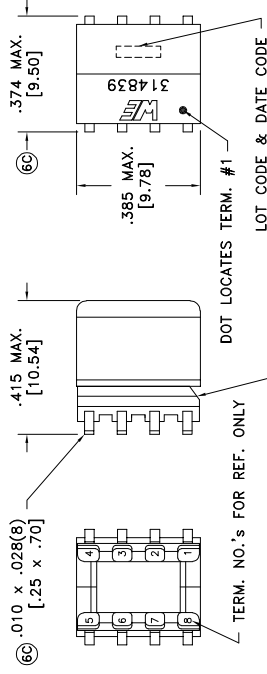


TERM. NO.'s FOR REF. ONLY

CHAMFERS LOCATE TERM.'s #1 & 8

DOT LOCATES TERM. #1

LOT CODE & DATE CODE

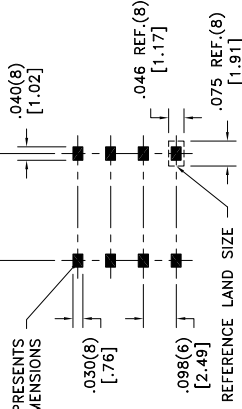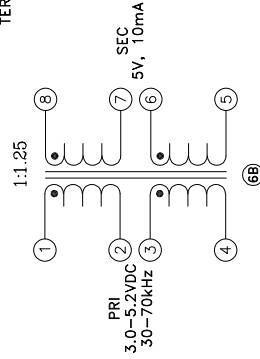

REFERENCE LAND SIZE
CUSTOMER TO DETERMINE LAND LAYOUT

ELECTRICAL SPECIFICATIONS @ 25°C unless

PARAMETER	TEST CONDITION
D.C. RESISTANCE	1-4 tie(2+3), @20°C
D.C. RESISTANCE	8-5 tie(7+6), @20°C
INDUCTANCE ¹	1-4 tie(2+3), 100kHz, 100m
DIELECTRIC	1-8 tie(2+3, 7+6) 1875VAC, 1 second
TURNS RATIO	(8-5):(1-4), tie(7+6,

69

¹ Designed to meet the specification thru the

GENERAL SPECIFICATIONS:

OPERATING TEMPERATURE RANGE: -40°C to +100

VOLTAGE-TIME: 100VuS, Based on Bsat at 100°C

across terminals 1-4.

CURRENT RATING: 150mA rms

Designed to comply with the following requirements:

EN60950-1, UL60950-1/CSA60950-1 and AS/NZS60

- Functional insulation for a primary circuit at

Wire insulation & RoHS status not affected by wire color.
Wire insulation color may vary depending on availability.

REV.	DATE	Packaging Specifications	CONVENTION PLACEMENT	SEE REVISION SHEET FOR REVISION LEVEL
6D	1/23	Method: Tape & Reel		
6C	9/22	PKG-0410 www.we-online.com/midcom		
6B	11/15			
6A	8/14			

Tolerances unless otherwise specified:	
Angles: ±1°	Decimals: ±.005 [1.3]
Fractions: ±1/64	Footprint: ±.005 [1.3]
This drawing is dual dimensioned. Dimensions in brackets are in millimeters.	

DRAWING TITLE

TRANSFORMER

eISos p/n: 750314839

PART	75
SPECI	

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

 [View 750314839 on WIN SOURCE](#)

 [Wurth Electronics Inc](#) Information

Optimize Your Supply Chain with WIN SOURCE Solutions

-  Global Sourcing Solution
-  Obsolete Management
-  Cost Control Management
-  Shortage Management
-  Alternative Solution
-  Excess Inventory Management