



**THE DATASHEET OF
UUA1A470MCL1GS**




ALUMINUM ELECTROLYTIC CAPACITORS

UUA

6mmL Chip Type, Long Life Assurance



- Chip type with load life of 3000 to 5000 hours at +105°C.
- Designed for surface mounting on high density PC board.
- Compliant to the RoHS directive (2011/65/EU,(EU)2015/863).
- AEC-Q200 Qualified. Please contact us for details.


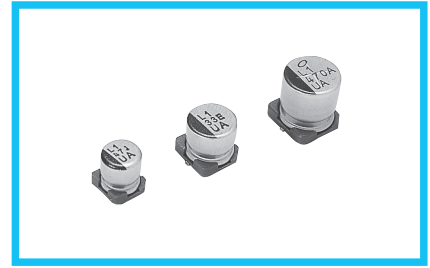


Specifications


Item	Performance Characteristics						
Category Temperature Range	-55 to +105°C						
Rated Voltage Range	6.3 to 50V						
Rated Capacitance Range	1 to 1000μF						
Capacitance Tolerance	±20% at 120Hz, 20°C						
Leakage Current ※	After 2 minutes' application of rated voltage at 20°C, leakage current is not more than 0.01 CV or 3 (μA) , whichever is greater.						
Tangent of loss angle (tan δ)	Measurement frequency : 120Hz at 20°C						
	Rated voltage (V)	6.3	10	16	25	35	50
	tan δ (max.)	0.28	0.24	0.20	0.16	0.13	0.12
Stability at Low Temperature	Measurement frequency : 120Hz						
	Rated voltage (V)	6.3	10	16	25	35	50
	Impedance ratio Z(-25°C) / Z(+20°C)	4	3	2	2	2	2
	ZT / Z20 (max.)	Z(-55°C) / Z(+20°C)	10	7	5	3	3
Endurance	The specifications listed at right shall be met when the capacitors are restored to 20°C after the rated voltage is applied for 5000 hours (3000 hours for φD = 4, 5 and 6.3) at 105°C.						
	Capacitance change	Within ±30% of the initial capacitance value					
	tan δ	300% or less than the initial specified value					
	Leakage current	Less than or equal to the initial specified value					
Shelf Life	After storing the capacitors under no load at 105°C for 1000 hours and then performing voltage treatment based on JIS C 5101-4 clause 4.1 at 20°C, they shall meet the specified values for the endurance characteristics listed above.						
Resistance to soldering heat	The capacitors are kept on a hot plate for 30 seconds, which is maintained at 250°C. The capacitors shall meet the characteristic requirements listed at right when they are removed from the plate and restored to 20°C.						
	Capacitance change	Within ±10% of the initial capacitance value					
	tan δ	Less than or equal to the initial specified value					
	Leakage current	Less than or equal to the initial specified value					
Marking	Black print on the case top.						

※ I : Leakage Current (μA), C : Rated Capacitance (μF), V : Rated Voltage (V)

Chip Type

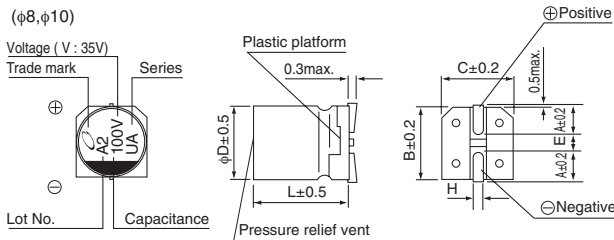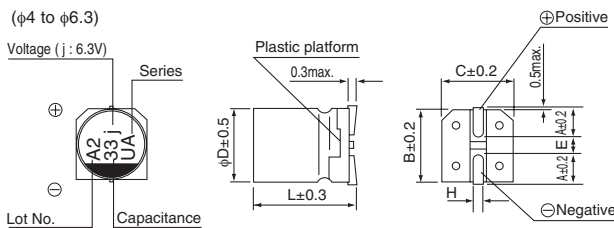

Type numbering system (Example : 16V 10μF)

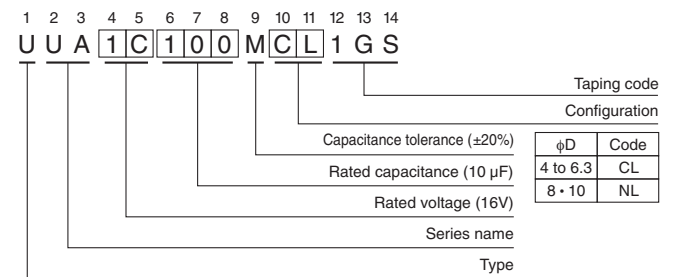

Voltage

V	6.3	10	16	25	35	50
Code	j	A	C	E	V	H

Frequency coefficient of rated ripple current

Frequency	50 Hz	120 Hz	300 Hz	1 kHz	10 kHz or more
Coefficient	0.70	1.00	1.17	1.36	1.50

● Dimension table in next page.

UUA

■ Dimensions

Rated Voltage (V) (code)	Rated Capacitance (μF)	Case Size φD×L (mm)	tan δ	Leakage Current (μA) (at 20°C after 2 minutes)	Rated Ripple (mArms) (105°C/120Hz)	Part Number
6.3 (0J)	22	4×5.8	0.28	3	22	UUA0J220MCL1GS
	33	5×5.8	0.28	3	35	UUA0J330MCL1GS
	47	5×5.8	0.28	3	38	UUA0J470MCL1GS
	100	6.3×5.8	0.28	6.3	69	UUA0J101MCL1GS
	220	6.3×7.7	0.28	13.86	120	UUA0J221MCL1GS
	330	8×10	0.28	20.79	290	UUA0J331MNL1GS
	470	10×10	0.28	29.61	320	UUA0J471MNL1GS
10 (1A)	1000	10×10	0.28	63	410	UUA0J102MNL1GS
	22	5×5.8	0.24	3	30	UUA1A220MCL1GS
	33	5×5.8	0.24	3.3	35	UUA1A330MCL1GS
	47	6.3×5.8	0.24	4.7	50	UUA1A470MCL1GS
	100	6.3×7.7	0.24	10	81	UUA1A101MCL1GS
	220	8×10	0.24	22	141	UUA1A221MNL1GS
	330	10×10	0.24	33	290	UUA1A331MNL1GS
16 (1C)	470	10×10	0.24	47	320	UUA1A471MNL1GS
	10	4×5.8	0.20	3	18	UUA1C100MCL1GS
	22	5×5.8	0.20	3.52	30	UUA1C220MCL1GS
	33	6.3×5.8	0.20	5.28	48	UUA1C330MCL1GS
	47	6.3×5.8	0.20	7.52	50	UUA1C470MCL1GS
	100	6.3×7.7	0.20	16	81	UUA1C101MCL1GS
	220	10×10	0.20	35.2	216	UUA1C221MNL1GS
25 (1E)	330	10×10	0.20	52.8	290	UUA1C331MNL1GS
	470	10×10	0.20	75.2	320	UUA1C471MNL1GS
	10	5×5.8	0.16	3	27	UUA1E100MCL1GS
	22	6.3×5.8	0.16	5.5	44	UUA1E220MCL1GS
	33	6.3×5.8	0.16	8.25	50	UUA1E330MCL1GS
	47	6.3×7.7	0.16	11.75	63	UUA1E470MCL1GS
35 (1V)	100	8×10	0.16	25	116	UUA1E101MNL1GS
	220	10×10	0.16	55	320	UUA1E221MNL1GS
	330	10×10	0.16	82.5	450	UUA1E331MNL1GS
	4.7	4×5.8	0.13	3	16	UUA1V47R7MCL1GS
	10	5×5.8	0.13	3.5	27	UUA1V100MCL1GS
	22	6.3×5.8	0.13	7.7	44	UUA1V220MCL1GS
	33	6.3×7.7	0.13	11.55	57	UUA1V330MCL1GS
50 (1H)	47	8×10	0.13	16.45	92	UUA1V470MNL1GS
	100	10×10	0.13	35	151	UUA1V101MNL1GS
	220	10×10	0.13	77	375	UUA1V221MNL1GS
	1	4×5.8	0.12	3	8	UUA1H010MCL1GS
	2.2	4×5.8	0.12	3	12	UUA1H2R2MCL1GS
	3.3	4×5.8	0.12	3	17	UUA1H3R3MCL1GS
	4.7	5×5.8	0.12	3	22	UUA1H4R7MCL1GS
50 (1H)	10	6.3×5.8	0.12	5	32	UUA1H100MCL1GS
	22	6.3×7.7	0.12	11	58	UUA1H220MCL1GS
	33	8×10	0.12	16.5	140	UUA1H330MNL1GS
	47	8×10	0.12	23.5	170	UUA1H470MNL1GS
	100	10×10	0.12	50	310	UUA1H101MNL1GS

• For taping specifications, recommended land size/soldering by reflow and minimum order quantity, please refer to the Guidelines for Aluminum Electrolytic Capacitors.

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

- ⊖ [View UUA1A470MCL1GS on WIN SOURCE](#)
- ⊖ [Nichicon Information](#)

Optimize Your Supply Chain with WIN SOURCE Solutions

- ✓ Global Sourcing Solution
- ✓ Obsolete Management
- ✓ Cost Control Management
- ✓ Shortage Management
- ✓ Alternative Solution
- ✓ Excess Inventory Management