



THE DATASHEET OF ADZS-A2B-ANALYZER



A2B BUS FEATURES

Line topology

Single master, multiple slave

Up to 15 m between nodes and up to 40 m overall cable length

Communication over distance

Synchronous data

Multichannel I²S/TDM to I²S/TDM

Clock synchronous, phase aligned in all nodes

Low latency slave to slave communication

Control and status information I²C to I²C

GPIO over distance

Phantom power or local power slave nodes

Configurable with SigmaStudio graphical software tool

Qualified for automotive applications

ADDITIONAL TRANSCEIVER FEATURES

Configurable as A²B bus master or slave (AD2425W)

I²C interface

8-bit to 32-bit multichannel I²S/TDM interface

I²S/TDM/PDM programmable data rate

Up to 32 upstream and 32 downstream channels

PDM inputs for 4 high dynamic range microphones

APPLICATIONS

Automotive audio communication link

Active noise cancellation

Microphone arrays for hands free and in car communication


GENERAL DESCRIPTION

The Automotive Audio Bus (A²B[®]) provides a multichannel, I²S/TDM link over distances of up to 15 m between nodes. It embeds bidirectional synchronous data (for example digital audio), clock, and synchronization signals onto a single differential wire pair. A²B supports a direct point to point connection and allows multiple, daisy-chained nodes at different locations to contribute or consume time division multiplexed channel content. A²B is a single-master, multiple-slave system where the transceiver chip at the host controller is the master. The master generates clock, synchronization, and framing for all slave nodes. The master A²B chip is programmable over a control bus (I²C) for configuration and read back. An extension of this control bus is embedded in the A²B data stream, which grants direct access of registers and status information on slave transceivers as well as I²C to I²C communication over distance.

Table 1. Product Comparison Guide

Feature	AD2421W	AD2422W	AD2425W
Master capable	No	No	Yes
Functional TRX blocks	A only	A + B	A + B
I ² S/TDM support	No	No	Yes
PDM microphone inputs	4 mics	4 mics	4 mics
Maximum node to node cable length	15 m	15 m	15 m

FUNCTIONAL BLOCK DIAGRAM

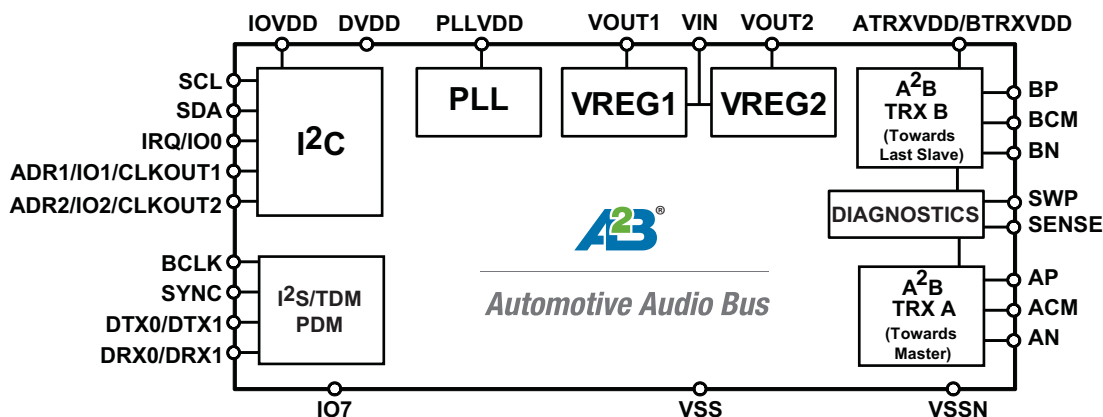

The A²B and the A²B logos are registered trademarks of Analog Devices, Inc.

Rev. SpB

[Document Feedback](#)

Information furnished by Analog Devices is believed to be accurate and reliable. However, no responsibility is assumed by Analog Devices for its use, nor for any infringements of patents or other rights of third parties that may result from its use. Specifications subject to change without notice. No license is granted by implication or otherwise under any patent or patent rights of Analog Devices. Trademarks and registered trademarks are the property of their respective owners.

I²C refers to a communications protocol originally developed by Philips Semiconductors (now NXP Semiconductors).

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Analog Devices Inc.:](#)

[ADZS-A2B-ANALYZER](#)

Looking for pricing, stock, or lifecycle information?

Click below to explore more details on WIN SOURCE:

- ⊖ [View ADZS-A2B-ANALYZER on WIN SOURCE](#)
- ⊖ [Analog Devices Inc. Information](#)

Optimize Your Supply Chain with WIN SOURCE Solutions

- ✓ Global Sourcing Solution
- ✓ Obsolete Management
- ✓ Cost Control Management
- ✓ Shortage Management
- ✓ Alternative Solution
- ✓ Excess Inventory Management